



DESCRIPTION

The IXGW-GW is a gateway adaptor for the IXG Series IP multi-tenant system. Only 1 gateway adaptor is allowed per system. This adaptor allows the system to be programmed to call cloud-based mobile apps, giving users the ability to answer the calls from visitors remotely and release the door.

The IXG app is compatible with iOS® and Android® mobile devices. Up to 8 apps can be registered per tenant station.


FEATURES

- PoE compliant
- DIN Rail mountable
- 8 simultaneous call paths
- Supports up to 9,999 IXG apps

IXGW-GW

Gateway Adaptor

FEATURE CALL-OUT

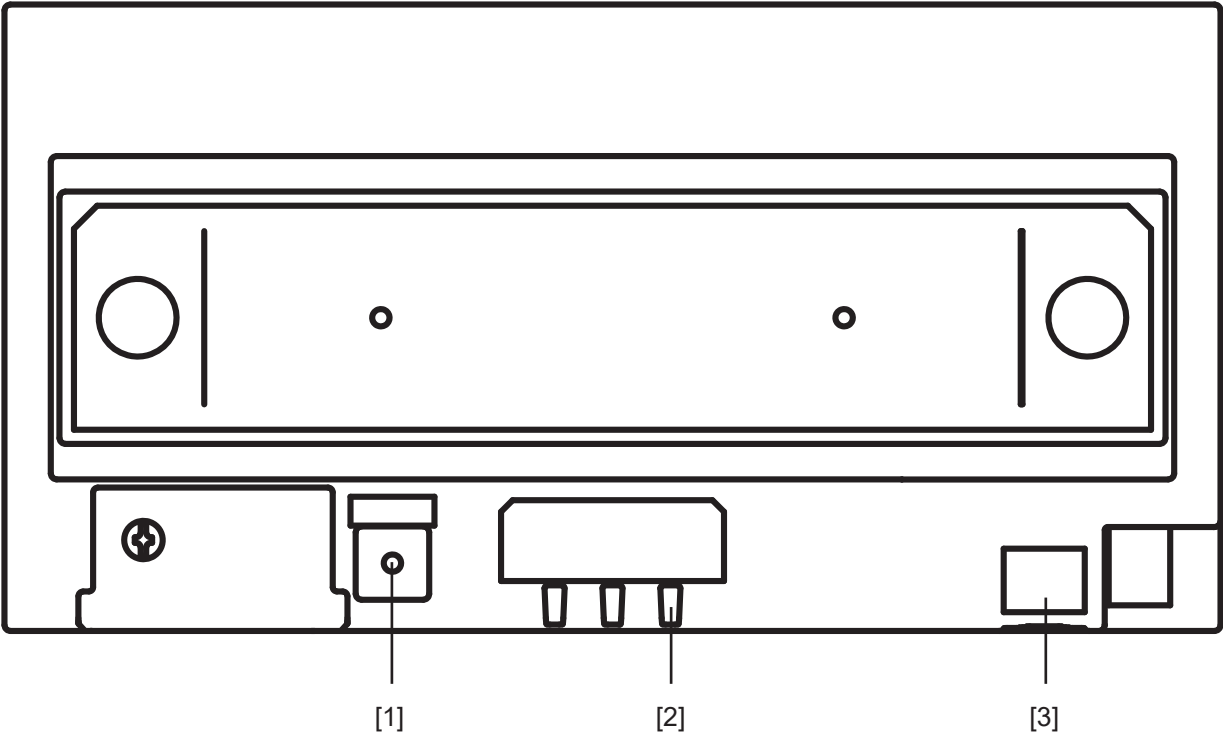

FEATURE CALL-OUT DEFINITIONS

- [1] Reset
- [2] Status Indicator (orange/green)
- [3] LAN Port (PoE)

SPECIFICATIONS

Power Source:	PoE
Consumption:	Standby 2.1W, Max 2.9W
LAN:	Ethernet (10BASE-T, 100BASE-TX)
Packet delivery:	Unicast, Multicast
Protocol:	IPv4/v6, TCP, UDP, SIP, HTTPS, RTP, RTCP, SRTP, SRTCP, IGMP, MLD, SFTP, DHCP, NTP, DNS, MQTT, ICE, DTLS, SDP
Channel:	8
Encryption:	TLS 1.0, 1.1, 1.2
Operating Temp:	14° ~ 122°F (-10° ~ 50°C)
Dimensions:	4-¼" H x 8-¼" W x 2-⅜" D