

# DC118

## Surface, overhead, door mount contact, wide gap

### Industrial contact

---

The DC115/DC118 are designed to be installed in commercial and industrial environments where a rugged sealed unit is required. It is ideal for metal doors, overhead doors, fences and gates. Each model features a high strength extruded aluminium housing and is completely encapsulated in an exclusive polyurethane potting compound.

### Comprehensive range

---

The range features wide gap distances and several models to meet any application need. Armoured cable is available.



### Details

---

- Mounting brackets available for gates, garage doors, freezers
- Rugged construction for long life
- Convenient surface mounting
- 2 m armoured cable
- Tamper loop provided
- DC115 is polarity-sensitive with reference to magnet direction

# DC118

Surface, overhead, door mount contact, wide gap

## Technical specifications

### General

Application type	Overhead
Contact type	NC
Connectivity	4 wires, 2 m

### Wired/wireless


Wired-wireless	Wired
----------------	-------

### Physical

Colour	Silver
Material	Anodised aluminium finish
Dimensions magnet	76 x 12 x 25 mm
Dimensions contact / sensor	76 x 12 x 25 mm
Operating gap	75 mm (max.)

### Standards & regulation

EN50131 grade	Grade 2
---------------	---------

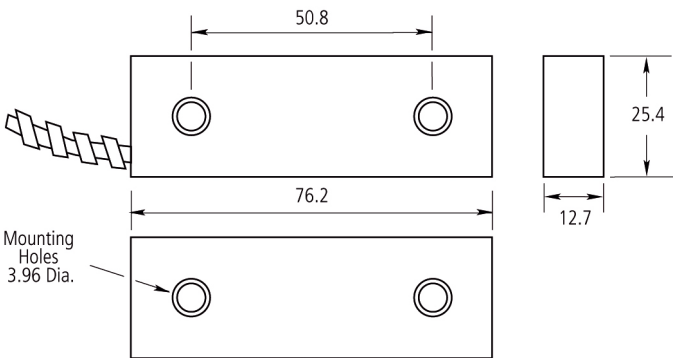

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.