


TruVision TVMI-PM3 Multi-imager Camera Pendant Mount Bracket Installation Instructions

Description

Figure 1: Physical description

Dimensions: 116.5 × 500 mm (4.59 × 19.7 in.)

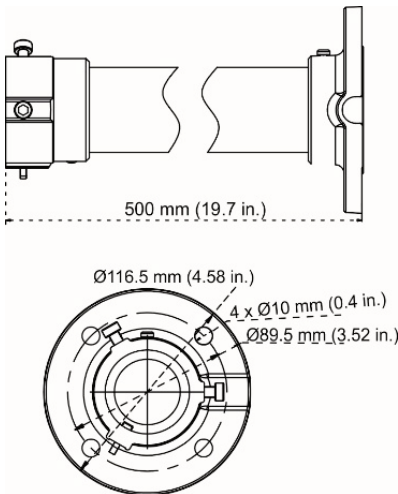

Weight: 960 g (2.12 lb.)

Supported camera: TVS-5101

Screws Bolt M8×30 mm (5 pcs)




Screws PM4×12 mm (2 pcs)
(pre-installed on the mount)



Installation

To attach the multi-image camera to the pendant mount bracket:

1. Choose the appropriate location on the mounting surface. Use the pendant base to mark the holes for the mounting hardware and to also provide access for the cable harness prior to installing with the mount.
2. Drill holes in the mounting surface and install the four expansion anchors.
3. Provide an access hole in the mounting surface for the camera interface cables. Pull the cables through the access hole.




4. Route the cables through the pendant mount base and tube.
5. Secure the pendant mount base to the mounting surface using the hardware provided with the expansion anchors.


Note: Depending on the type of ceiling, you may need to use other screws (not included) to install the pendant mount bracket.

6. Install the cup base on the pendant mount bracket by lining up the insert with the knocked flat section of the cup base. Rotate the cup base 90 degrees. Tighten with the two hex head locking screws using the hex wrench that is provided with the multi-imager camera. Clip the safety lanyard that is attached to the cup base to the pendant mount.

Locking screw



7. Route the interconnect camera cables through the multi-imager camera. If you are not using all the features/cables, you may want to tuck them behind the adapter plate to keep them out of the way so they do not interfere when installing the camera on the pendant mount.
8. Tighten the Phillips head set screws on both ends of the pendant mount.
9. To complete camera installation, refer to the installation instructions for the specific cup base and camera.



Legal information

Copyright

© 2021 Carrier. All rights reserved. Specifications subject to change without prior notice.

Trademarks and patents

TruVision names and logos are a product brand of Aritech, a part of Carrier.

Certification



Contact information

EMEA: <https://firesecurityproducts.com>

Australian/New Zealand:

<https://firesecurityproducts.com.au/>

Product documentation

Please consult the following web link to retrieve the electronic version of the product documentation. The manuals are available in several languages.

