

SPEC SHEET

LED SEMI COMMERCIAL DISPLAY

MODELS

0E-32MON720P-UK 32"(32" diagonal) 0E-43MON1080-UK 43"(43" diagonal)

PANEL SPECIFICATIONS

DLED



Size	32" diagonal	43" diagonal
Panel	HD	FHD
Display Scale	16:9	16:9
Backlight	DLED	DLED
Maximum Resolution	1366x768	1920x1080
Best Working Resolution	1366x768@60Hz	1920x1080@60Hz
Pixel Pitch	0.02" x 0.02" (0.510mmx0.510mm)	0.02" x 0.02" (0.4902mmx0.4902mm)
Active Area	27.4" x 15.4" (697.9mmx392.3mm)	37" x 20.8" (941.2mmx529.4mm)
Viewing Angle	H:178°,V:178° (CR>10)	H:178°,V:178° (CR>10)
Center Luminance of White	Typ.:400cd/m² (NITS)	Typ.:500cd/m² (NITS)
Contrast Ratio	Typ.:1100:1	Typ.:1200:1
Response Time	Typ.:9ms (GTG)	Typ.:8ms (GTG)
Display Color	16.7 Million	16.7 Million
Color Gamut	Typ.:72% NTSC	Typ.:72% NTSC

STRUCTURE SIZE

Model	Plastic construction	Plastic construction
Size w×h×d (without base)	28.8" x 17.1" x 3.2" (732×434×80.9mm)	38.3" x 22.3" x 3.7" (972.5×566×94.2mm)
Size w×h×d (with base)	28.8" x 18.7" x 7.7" (732×474.6×195.6mm)	38.2" x 23.9" x 8.3" (972.5×608.2×211.3mm)
Size w×h×d Packing size (with base)	31.6" x 22.2" x 5.7" (805×565×145mm)	41.3" x 26.7" x 6.2" (1050×680×160mm)
Weight (with base)	net weight 9.9 lbs (4.5 Kg) gross weight: 14.9 lbs (6.8 Kg)	net weight 16.4 lbs (7.45 Kg) gross weight 25.1 lbs (11.4 Kg)
Vesa	7.9" x 3.9" (200mm×100mm)	7.9" x 7.9" (200mm×200mm)

INTERFACE CONFIGURATION (ALL MODELS)

0E-32MON720P-UK

Input Interface	VGA	1
	AUDIO IN	1
	VIDEO (IN/LIN/RIN)	1
	USB	2
	AUDIO OUT	1
	CO-AXIAL OUT	1
	HDMI	3

0E-43MON1080-UK

Input Interface	CO-AXIAL OUT	1
	HDMI	2
	VGA	1
	AUDIO IN	1
	Y/PB/PR	1
	VIDEO (IN/LIN/RIN)	1
	USB	2
	AUDIO OUT	1



FOR MORE INFORMATION,
CONTACT YOUR ADI SALES PERSON.

www.adiglobal.com

SPEC SHEET



MODELS

0E-32MON720P-UK 32"(32" diagonal) 0E-43MON1080-UK 43"(43" diagonal)

FUNCTION PARAMETER (ALL MODELS)

System	Menu language	English/French/Spanish/Italian Netherlands/Polish/Czech/Danish
	Sleep time setting	Yes
	Video format support	MJPEG,MPEG-1,MPEG-2, MPEG-4,H.264,FLV
	Audio format support	MP3,WAV
	Picture format support	JPG/JPEG,BMP,PNG
	Text format support	TEXT
Picture	Picture mode	User/Dynamic/Standard
	Color temperature	User/Cool/Medium/Warm
	Comb filtering	3D
Sound	Sound mode	Standard/Music/Movie/Sports/User
	Mute	Yes
	Stereo sound	Yes

POWER MGT (ALL MODELS)

Size	32"	43"
Power input	100V-240V AC 60/50Hz	
Working consumption	≤75W	≤110W
Standby consumption	≤0.5W (auto wake up off model)	
Audio power	10W×2	

ACCESSORY (ALL MODELS)

Power Cable	1PCS
HDMI Cable	1PCS
IR Remote Control	1PCS
AAA Batteries	1PCS
Screws for Mounting Display	1PCS
Screws for Installing Display Stand	1PCS
Base of Stands	1PCS
User's Manual	1PCS

BEZEL SIZE/MM

Model	Left	Right	Top	Bottom
0E-32MON720P-UK	0.6"(15.1mm)			0.9"(22.6mm)
0E-43MON1080-UK	0.58"(14.9mm)			0.8"(20mm)

SAFETY & CERTIFICATION (ALL MODELS)

Safety (class I)	Withstand voltage strength	2.5KV DC/60s		
	Leakage current	≤3.5mA(264V AC/60s)		
	Earthing protective resistance	≤100mΩ(25A DC/20s)		
Authentication		CE/FCC/ROHS/HDMI/UL/WEEE/REACH		
Remote control area		≥8m straight line ≥7m horizontal±30° and vertical±15°		
Environment	Working condition	Temperature: 32°F ~104°F (0°C~40°C)	Humidity: 10%~90%	Atmosphere: 86KPa~104KPa
	Storage condition	Temperature: -4°F ~122°F (-20°C~50°C)	Humidity: 5%~95%	Atmosphere: 86KPa~104KPa



FOR MORE INFORMATION,
CONTACT YOUR ADI SALES PERSON.

www.adiglobal.com


SPEC SHEET



MODELS

0E-32MON720P-UK 32"(32" diagonal) 0E-43MON1080-UK 43"(43" diagonal)

MOUNTING ON THE WALL

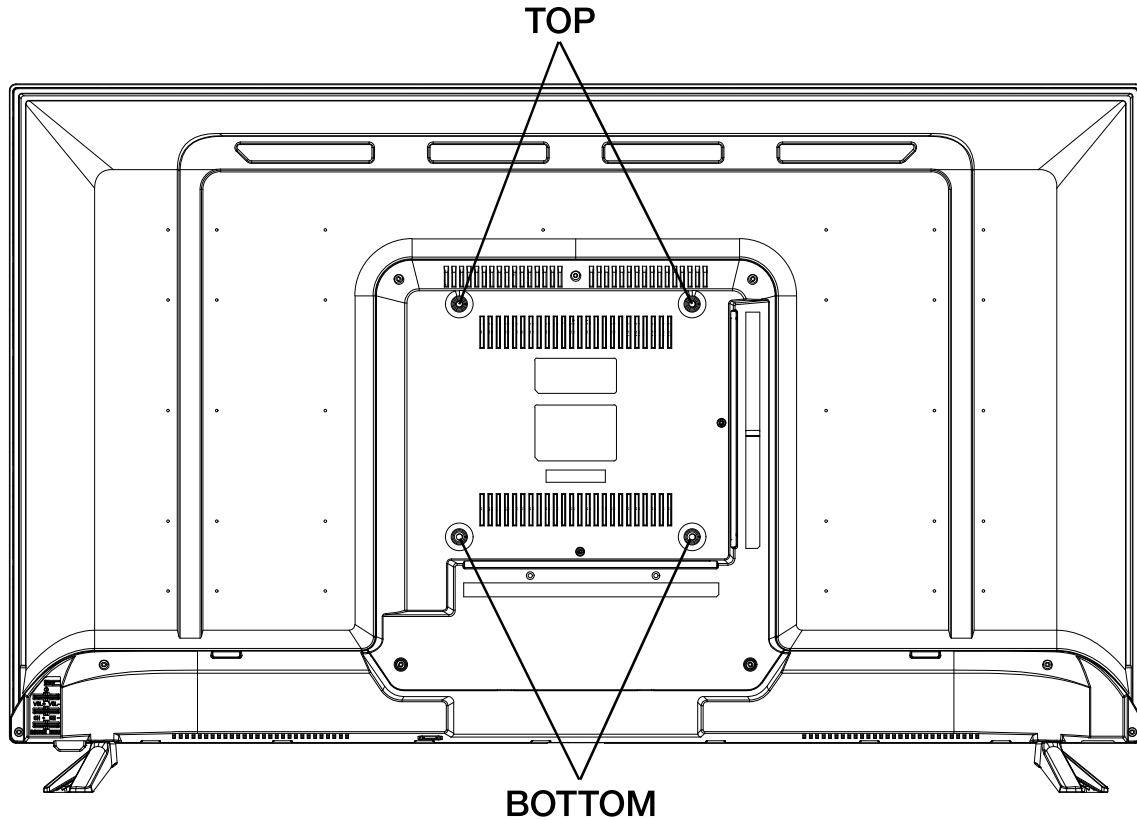

VESA MOUNTING

Model	Mounting Dimension	TOP	BOTTOM
0E-32MON720P-UK	7.9" x 3.9" (200mm×100mm)	HM6.0x14mm	HM6.0x14mm
0E-43MON1080-UK	7.9" x 7.9" (200mm×200mm)	HM6.0x14mm	HM6.0x14mm

*** *HARDWARE INCLUDED IN MONITOR BOX* ***

FOR MORE INFORMATION,
CONTACT YOUR ADI SALES PERSON.



www.adiglobal.com

SPEC SHEET

Connecting

