


## ULTRA HD PRO-GRADE LED COLOUR MONITOR

WBXML4K28

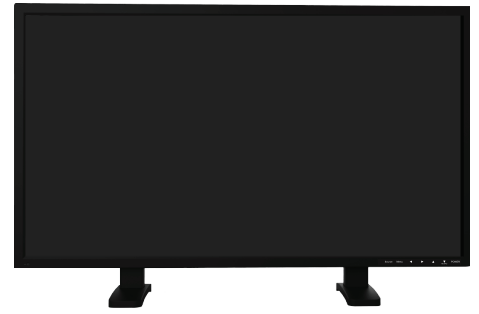

This professional grade widescreen LED 28" colour monitor offers HDMI, VGA, & BNC inputs. With an additional BNC looping output its versatility will allow it to work for any application. Boasting 16.7 million colours 4K UHD Resolution this monitor will make your video come to life.

- 28" Diagonal Viewing Size
- 3860 x 2160P Full HD Resolution
- DVI, VGA, BNC & HDMI Inputs
- 24/7 Operation
- Source Auto Detection
- Quick Touch Scalability 16:9/4:3
- Includes Audio, VGA, IR Remote & Dual Power Cables (EU,UK)
- 36 Month Warranty

PART #: WBXML4K28

UPC : 811914029885

LENGTH :

26.04inch/661.4mm WIDTH :

6.29inch/160mm HEIGHT :

18.22inch/462.8mm

WEIGHT : 23.3lbs/10.6kg

# SPEC SHEET

<b>Model</b>	<b>WBXML4K28</b>
Screen Diagonal Dimension (inches)	28
Viewable Area WxH (inches/mm)	25.55inch *14.54inch / 649mm*369.3mm
Led Type	LED
Pixel Pitch (mm)	0.16 x 0.16
Screen Maximum Resolution	3840 x 2160
Display Resolutions	50/60Hz
Supported Input Resolutions	50/60Hz
Refresh Rate	Up to 60Hz @ 3840x2160 downward compatible
Colour Depth (G)	1.073
Brightness (cd/ m <sup>2</sup> )	300
Auto Adjust	Yes
Monitor Aspect Ratio	16:9
Display Aspect Ratio	OSD selectable 16:9 or 4:3
Horizontal TV Lines	2160
Contrast Ratio	1000 :1SCR
Response Time (ms)	5 (GTG)
View Angle H/V (degrees)	170°x 160°/CR>10
Digital Video Inputs	HDMI up to 4K 60Hz, DVI up to 1920 x 1080
Analog Video In/Out	VGA up to 1920 x 1080.BNC CVBS looping
Audio Inputs (stereo)	1x3.5mm mini-jack
Speakers (W)	2 x 5
Stand-by (W)	<0.5
Power Consumption	45W Typical
Monitor Body Dimensions(inches/mm)	26.04inchx15.31inchx2.07inch / 661.5mmx388.9mmx52.7mm
Dimensions Monitor+Stand(inches/mm)	26.04inchx18.22inchx6.29inch / 661.5mmx462.8mmx159.8mm
Panel Surface	Matte black
Case & Stand Material	Metal + Aluminum (removable stand)
VESA Mounting Pattern (mm)	100 x 100
Base/Stand Included	Yes
Base Tilt Angle	-5°~15°
Weight Cabinet Only (lb/kg )	17.1lbs / 7.8kg
Weight Cabinet+Base Stand (lb/kg)	19.1lbs / 8.7kg
Power Supply (internal)	AC 100-240V~50/60Hz 1.1A
Operating Temperature	0°C~40°C / 32°F~104°F
Storage Temperature	-20°C~50°C / -4°F~122°F
Operating Humidity	10~90%
Accessories	Dual Power cable(EU,UK)/VGA cable/Audio cable/IR Remote/Batteries Allen wrench/Screws/Base of stand/Stand support/User manuals
Rack Mount Screw Size (mm)	Screws for Mounting Monitor, Screws Type: HMΦ6.0x10mm/4pcs Screws for Securing Base of Stand, Screws Type: KMΦ4.0x10mm/6pcs Screws for Installing Monitor Stand, Screws Type: HMΦ6.0x10mm/4pcs
Certifications	CE/FCC/ROHS/HDMI/UL/WEEE/REACH
Warranty	36 Months