


# TruVision TVMI-PMA Multi-imager Camera Pendant Mount Pipe Extension Installation Instructions

## Description

**Figure 1: Physical description**

Dimensions: 116.5 × 57 mm (4.59 × 2.24 in.)

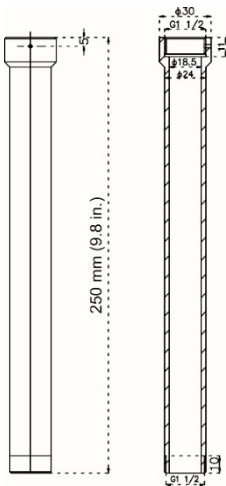

Weight:	505 g (1.11 lb.)
Supported camera:	TVS-5101 (with TVMI-PM/ TVMI-PM2/ TVMI-PM3)
Screws	Screws PM4×12 mm (2 pcs)



## Installation


**To attach the multi-imager camera to the pendant mount bracket with the mount pipe extension:**

1. Insert the pipe extension on to the pendant mount.






2. Route the cables through the pendant mount base and pipe.
3. Secure the pendant mount base to the mounting surface using the hardware provided with the expansion anchors.
4. Screw the cup base onto the pendant mount and tighten with the locking screw.
5. Route the camera cables through the back box. If you are not using all the features/cables, you may want to tuck them behind the adapter plate to keep them out of the way so they do not interfere when installing the camera on the pendant mount.

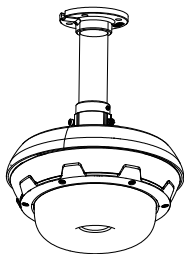6. To complete camera installation, refer to the installation instructions for the specific mount and camera.



## Legal information

Copyright	© 2021 Carrier. All rights reserved. Specifications subject to change without prior notice.
Trademarks and patents	TruVision names and logos are a product brand of Aritech, a part of Carrier.
Certification	  

## Contact information

EMEA: <https://firesecurityproducts.com>  
Australian/New Zealand: <https://firesecurityproducts.com.au/>

## Product documentation

Please consult the following web link to retrieve the electronic version of the product documentation. The manuals are available in several languages.

