


ATS608

8-way plug-in input expander

8-way plug-in input expander

The ATS608 offers a 8-way input expansion to Advisor Advanced panels. To reduce required space in the Main control panel housing, the unit is a plug-in to the Main Control panel PCB. The ATS608 provides for 8 additional inputs available through screw terminals. Inputs are assigned to zones through configuration in the control panel. The zone type is defined through the zone menu in the main control panel.

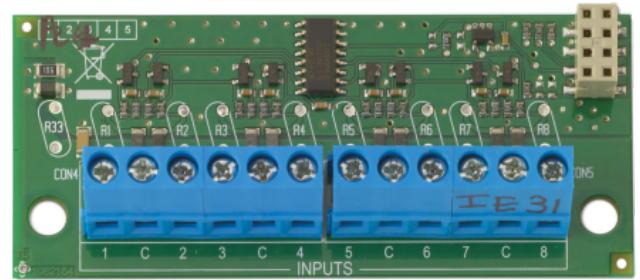

Características Standard

- 8 inputs
- Plug-in to Advisor Advanced panels
- Supports shock sensors

ATS608

8-way plug-in input expander

Especificações Técnicas

General

Expander type	Input expander
Product line	Advisor Advanced
Connection type	Plug-in
Max. per panel	1

Inputs

Total	8
Onboard	8

Electrical

Operating voltage	10.5 to 13.8 VDC
Current consumption	10 mA

Physical

Physical dimensions	80 x 35 mm
---------------------	------------

Environmental

Operating temperature	0 to +50°C
Relative humidity	95% non-condensing
Environment	Class II - Indoor (General)

Standards & regulation

Certification	EN50131 Grade 3, VdS
---------------	----------------------

Como Encomendar

Referência	Descrição
ATS608	8-way plug-in input expander
ATS1000A-SM	Advisor Advanced panel, EN grade 2, 8 - 32 zones, 4 areas, 1A PSU, Small metal housing, Multi-lingual
ATS1000A-MM	Advisor Advanced panel, EN grade 2, 8 - 32 zones, 4 areas, 1A PSU, medium metal housing, multi-lingual
ATS2000A-MM	Advisor Advanced panel, EN grade 2, 8 - 64 zones, 8 areas, 2A PSU, Metal housing, Multi-lingual
ATS626	16-way plug-in output expander