

AXIS T8061 Ethernet Surge Protector


Protect PoE device from lightning

Protect your Ethernet network devices, such as IP cameras, switches or midspans, from lightning entering through the Ethernet cable with AXIS T8061 Ethernet Surge Protector. It can be easily installed on a wall or a pole, and thanks to its weatherproof enclosure, it can withstand water, dust and the ingress of water. AXIS T8061 Ethernet Surge Protector can be installed before the Ethernet cable enters the building to protect indoor network devices, or immediately adjacent to outdoor Axis network cameras.

- > Supports data rates of up to 1 Gbps
- > Protects up to 10 kV surge
- > All eight lines protected, including PoE
- > Outdoor ready
- > Flexible installation wall or pole mounted

Indoor

Outdoor

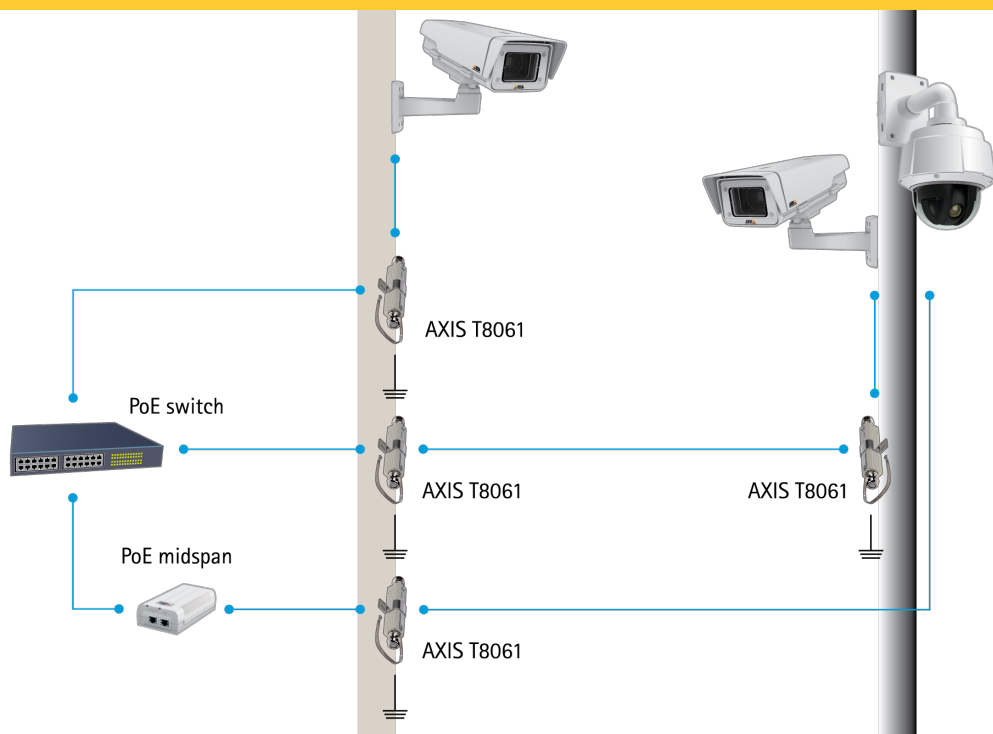

AXIS T8061 Ethernet Surge Protector

General		0 to 95% (non-condensing)	
Casing	Weatherproof metal enclosure	Approvals	IEC 60529 IP66
Dimensions	30 x 30 x 190 mm 1.18 x 1.18 x 7.48 in		NEMA 250 Type 4X
Weight	270 g 0.6 lb		IEC 61643-21
Environment	Indoor Outdoor		UL 497B
Mounting option	Wall Pole (requires straps or similar)	Optional accessories	GR1089
Connectors	RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE		ITU-T K.45
Power	Surge Handling Capability: 10 kV, 5 kA to ground in 8/20 μ s 800 V, 100 A PoE Input Power: 95 W (max) Input Current: 2 A (max)	Warranty	EN 50581
Operating conditions	-40 °C to 85 °C -40 °F to 185 °F		REACH
			WEEE
		For more accessories, see www.axis.com	
		Axis 3-year warranty, see www.axis.com/warranty	
		Environmental responsibility: www.axis.com/environmental-responsibility	