



Qing Cables

Malmesbury Road,
Kingsditch Industrial Estate,
Cheltenham, Glos, GL51 9PL. UK



T: 01242 224141


F: 01242 224134

www.qingcables.com

enquire@qingcables.co.uk

This specification and images

© Qing Cables Ltd

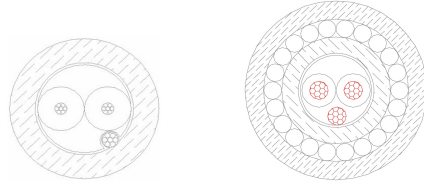

OSP Single Pair Range

Data Cable Overall Screened - Single Pair [2 Core]

600V Rated

Physical Characteristics

	LSF / LSZH / PE	SWA
Conductor:	Stranded Tinned Copper Wire	
Size:	see below	
Nº of Pairs:	1 Pair	
Insulation:	PE [OSP1/22 - Polypropylene]	
Screening:	Overall Alu Foil Screen w/Drain Wire	
Inner Sheath:	n/a	LSZH Ø5.60mm
SWA:	n/a	0.9mm Galvanised Steel Wire
Outer Sheath:	see below	LSZH Ø9.60mm

UV Resistant External PE
Sheath is weather
resistant to ISO4892-3

LSZH Sheath meets:
IEC60332-1 [Flame Propagation]
IEC60754 [Halogen Free]
IEC61034 [Smoke Emissions]

Range

Conductor Size	Part Number	Sheath Colour	Overall Diameter	EN50575 CPR Class
22AWG (7/0.25mm) LSZH	OSP1/61LSZH [8761 Equivalent] Alternative to 9462 / 4500FE / 5500FE / 6500FE [Equiv. to Honeywell NC2221]	Grey	Ø3.80mm	E _{ca}
22AWG (7/0.25mm) PE	OSP1/61PE UV Resistant External PE Sheath [ISO4892-3]	Grey	Ø3.80mm	E _{ca}
22AWG (7/0.25mm) LSZH	OSP1/22LSZH [8451 Equivalent] Alternative to 1503A / 4500FE / 5500FE / 6500FE	Grey	Ø3.50mm	E _{ca}
20AWG (7/0.30mm) LSZH	OSP1/62LSZH [8762 Equivalent] Alternative to 4400FE / 5400FE / 6400FE	Grey	Ø4.80mm	E _{ca}
18AWG (16/0.25mm) LSZH	OSP1/60LSZH [8760 Equivalent] Alternative to 4300FE / 5300FE/6300FE [Equiv. to Honeywell NC1821]	Grey	Ø5.60mm	E _{ca}
18AWG (16/0.25mm) LSZH	OSP1/18LSZH/B2ca Alternative to 4300FE [Equiv. to Honeywell NCP1821]	Grey	Ø6.20mm	B2 _{ca} ,S1a,d0,a1
18AWG (16/0.25mm) PE	OSP1/60PE Alternative to 5300F1 UV Resistant External PE Sheath [ISO4892-3]	Black	Ø5.60mm	F _{ca}
18AWG (16/0.25mm) SWA	OSP1/60SWA LSZH	Black	Ø9.60mm	F _{ca}
16AWG (19/0.30mm) LSZH	OSP1/19LSZH [8719 Equivalent] Alternative to 4200FE / 5200FE / 6200FE	Grey	Ø7.20mm	E _{ca}
p16AWG (19/0.30mm) PE	OSP1/19PE [8719 Equivalent] UV Resistant External PE Sheath [ISO4892-3]	Grey	Ø7.20mm	F _{ca}
14AWG (19/0.36mm) LSZH	OSP1/14LSZH [8720 Equivalent] Alternative to 4100FE / 5100FE / 6100FE	Grey	Ø9.00mm	F _{ca}

Electrical Characteristics

	22AWG OSP1/61	22AWG OSP1/22	20AWG	18AWG	18AWG B2ca	16AWG	14AWG
Conductor DC Resistance [Ω/km]	54.1	54.1	37.6	23.7	20.5	13.8	9.8
Nominal Impedance	64Ω	64Ω	56Ω	57Ω	57Ω	65Ω	58Ω
Rated Voltage	600V	600V	600V	600V	600V	600V	600V
Insulation Resistance [MΩ/km]	>200	>200	>200	>200	>200	>200	>200
Rated Temperature	80°C	80°C	80°C	80°C	80°C	80°C	80°C

Colour Code

Black / Clear Black / Red Black / Clear Black / Clear Black / Red Black / Clear Black / White

Our full product range includes:

COAXIALS: RG / URM Digital / Satellite (incl Sky+) [CAI Approved] CCTV RF / Microwave
TELECOM: CW1308LSF CW1308LSZH CW1308B CW1128 CW1128/1198 CW1128/1252 Dropwire Jumper Wire CW1311 3002 Coax Flat Cordage
STRUCTURED WIRING: CAT5e UTP & FTP CAT6 UTP & FTP CAT6A U-UTP & U-FTP CAT7A S-FTP [PVC LSZH External UV PE SWA Versions]
DATA: Single Pair Shielded/Unshielded Overall Shielded Core Overall Shielded Pairs Foil & Braid Shield Individual Shielded Pairs Twinax [Belden Equivalents]
DEF STANDARD: 7/0.2 Unscreened / Screened 16/0.2 Unscreened / Screened
CCTV / SECURITY: RG/URM Coaxial Video/Door Entry Composites B54737 Alarm Flex Mains Flex PH30/PH120 Fire Performance Cable
FIBRE OPTICS: Singlemode/Multimode Loose Tube/Tight Buffer Internal/External LSZH Corrugated Armour/SWA
SPEAKER FLEX: "QCSound" Pro Grade OFC Cores LSZH Sheaths External Grade
CONNECTED HOME: QCMCS [2x HDTV Coax] + [2x CAT6] + [1x CAT5e]
CONTROL BUS CABLES: KNX/EIB Bus Cables DataBus® DiviceNet™ PROFIBUS Lutron Grafik Eye® CRESSNET® SIMMTRONIC - EBus / MBus / OBus Echelon LonWorks® Mode Lighting
MAINS FLEX: H03VV-F H03VVH2-F H05VV-F H05Z1Z1-F BS6500/BS7919 Arctic Grade H07RN-F
SOLAR: TUV Approved PV Cable.

All our products are RoHS2 [2015/863] and REACH Compliant unless stated otherwise

Every care is taken to ensure all information contained in this publication is correct.

No legal responsibility can be accepted for any inaccuracy.

The company reserves the right to alter or modify the information without notice.

Any images are for illustration purposes only.

Registered in England & Wales No. 2181405 Directors: M.L.G.Taylor, L.J.Taylor, K.M.Wylde

Statement of Conformance

It is hereby certified that any goods supplied that reference those above, conform to this specification unless otherwise noted

[Signature]