



## EMC TEST REPORT

Test Report No. : KES-EM-21T0186-R2  
Date of Issue : Feb. 24, 2023  
Product name : NETWORK CAMERA  
Model/Type No. : PND-A6081RV  
Variant Model : -  
Applicant : Hanwha Vision Co., Ltd  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Jan. 28, 2021  
Test date : Feb. 01, 2021 ~ Feb. 05, 2021  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Jung, Choi  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0186-R2  
Page (2) of (74)

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
Mar. 17, 2021	KES-EM-21T0186	Issued
Jun. 08, 2022	KES-EM-21T0186-R1	Test regulation addition on customer request.
Feb. 24, 2023	KES-EM-21T0186-R2	Change the Applicant and manufacturer at the request of the customer

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## TABLE OF CONTENTS

1.0	General Product Description .....	4
1.1	Test Voltage & Frequency .....	8
1.2	Variant Model Differences.....	8
1.3	Device Modifications .....	8
1.4	Equipment Under Test.....	8
1.5	Support Equipments .....	9
1.6	External I/O Cabling .....	10
1.7	EUT Operating Mode(s) .....	11
1.8	Configuration.....	12
1.9	Remarks when standards applied .....	13
1.10	Calibration Details of Equipment Used for Measurement .....	13
1.11	Test Facility .....	13
1.12	Laboratory Accreditations and Listings .....	오류! 책갈피가 정의되어 있지 않습니다.
2.0	Test Regulations.....	14
2.1	Conducted Emissions at Mains Power Ports .....	15
2.2	Conducted Emissions at Telecommunication Ports .....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz) .....	17
2.4	Radiated Electric Field Emissions(Above 1 GHz) .....	18
2.5	Harmonic Current Emissions .....	19
2.6	Voltage Fluctuations and Flicker .....	20
3.0	Criteria for compliance.....	21
3.1	Electrostatic Discharge.....	23
3.2	Radiated Electric Field Immunity .....	28
3.3	Electrical Fast Transients/Bursts .....	31
3.4	Surge Transients .....	34
3.5	Conducted Disturbance .....	38
3.6	Voltage Dips and Short Interruptions .....	41
APPENDIX A – TEST DATA.....		43
Conducted Emissions at Mains Power Ports.....		43
Conducted Emissions at Telecommunication Ports .....		45
Radiated Electric Field Emissions(Below 1 GHz) .....		47
Radiated Electric Field Emissions(Above 1 GHz) .....		49
Harmonic Current Emissions and Voltage Fluctuations and Flicker .....		51
Test Setup Photos and Configuration .....		54
Conducted Emissions at Mains Power Ports.....		54
Conducted Emissions at Telecommunication Ports .....		55
Radiated Electric Field Emissions(Below 1 GHz) .....		57
Radiated Electric Field Emissions(Above 1 GHz) .....		59
Harmonic Current Emissions and Voltage Fluctuations and Flicker .....		61
Electrostatic Discharge .....		62
Radiated Electric Field Immunity .....		63
Electrical Fast Transients/Bursts .....		64
Surge Transients .....		65
Conducted Disturbance .....		66
Voltage Dips and Short Interruptions .....		67
EUT External Photographs .....		68
EUT Internal Photographs .....		69



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0186-R2  
Page (4) of (74)

## 1.0 General Product Description

### Main Specifications of EUT are:

Video	
Imaging Device	1/2" CMOS
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360
Max. Framerate	H.265/H.264: Max. 60/50fps(60Hz/50Hz, AI analytics on), Max. 120/100fps(60Hz/50Hz, AI analytics off) MJPEG: Max. 15fps/12fps(60Hz/50Hz)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.008Lux(F1.3, 1/30sec, 30IRE) B/W : 0.0008Lux(F1.3, 1/30sec, 30IRE), 0Lux(IR LED on), 30/25fps Color: 0.016Lux(F1.3, 1/60sec, 30IRE) B/W : 0.0016Lux(F1.3, 1/60sec, 30IRE), 0Lux(IR LED on), 60/50fps Color: 0.032Lux(F1.3, 1/120sec, 30IRE) B/W : 0.0032Lux(F1.3, 1/120sec, 30IRE), 0Lux(IR LED on), 120/100fps
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB: Micro USB Type B, 1280x720 for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	4.38~9.33mm(2.13x) motorized varifocal
Max. Aperture Ratio	F1.3(Wide)~F2.15(Tele)
Angular Field of View	H:103.1°(Wide)~44.5°(Tele) / V:54.2°(Wide)~24.9°(Tele) / D:124°(Wide)~51.1°(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Lens Type	P iris
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0°~360° / -45°~85° / 0°~355°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (5) of (74)

Backlight Compensation	BLC, WDR, SSDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR, WiseNR II(using AI engine)
Digital Image Stabilization	Stabilization Support(built-in gyro sensor)
Defog	None
Motion Detection	8ea, polygonal zones
Privacy Masking	6ea, rectangle zones - Color: Gray/Green/Red/Blue/Black/White
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/12,000sec) Auto prefer shutter control based on AI engine
Digital PTZ	None
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	- Classified object type : Person/Face/Vehicle/License plate with attributes, BestShot per object - Analytics events based on AI engine : Object detection, Face mask detection, Directional detection, Digital auto tracking, Enter/Exit, Loitering, Virtual line, Social distancing detection - Analytics events : Defocus detection, Motion detection, Appear/Disappear, Tampering, Audio detection, Sound classification, Shock detection
Business Intelligence	People counting, Queue management, Heatmap based on AI engine
Serial Interface	None
Alarm I/O	Input 1ea / Output 1ea / DC 12V Power(Max. 50mA) 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover Audio playback
Audio In	Selectable(mic in/line in/built-in mic) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	40m(131.23ft), Wise IR
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature detect range	None
Temperature accuracy	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (6) of (74)

Temperature detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000 BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(5ea area), WiseStreamⅡ, WiseStreamⅢ(using AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(6 users) / Multicast Multiple streaming(Up to 5 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA) TPM with FIPS 140-2 level2 Secure boot, Verify firmware forgery
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
General	
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 2slots 512GB
Memory	4096MB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-25°C ~ +50°C (-13°F ~ +122°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Certification	IP52, IK10
Input Voltage	PoE+(IEEE802.3at), 12VDC

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (7) of (74)

Power Consumption	PoE+: Max 19.50W, typical 16.00W 12VDC: Max 17.00W, typical 13.50W
Mechanical	
Color / Material	White / Aluminum, Hard-coated dome bubble
RAL Code	RAL9003
Product dimensions / weight	Ø160x125mm(6.30x4.92"), Weight : 1.60Kg (3.53lb)
Conduit hole	1/2"(M20) Single, Double, 4"Octagon, Square
Hanging mount(Dome)	SBP-167HMM
Skin cover(Dome)	SBC-160B(Black), SPB-IND85W(Smoke dome cover)
Weather cap(Dome)	None
Power module	None
Backbox	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	Wide: 62.9m(206.34ft) / Tele: 183m(600.33ft)
Observe (63PPM/ 19PPF)	Wide: 25.1m(82.34ft) / Tele: 73.3m(240.46ft)
Recognize (125PPM/ 38PPF)	Wide: 12.6m(41.33ft) / Tele: 36.6m(120.07ft)
Identify (250PPM/ 76PPF)	Wide: 6.3m(20.67ft) / Tele: 18.3m(60.03ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 230 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PND-A6081RV	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (9) of (74)

## 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	PT1850221049	Dongguan PROCET Network Technology Co., Ltd	-
Notebook	CQ61-127TU	CNF91801TM	HP	-
Notebook Adapter	PPP09D	601W94D1CKU	HP	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Alarm Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
Button alarm	-	-	-	-
Smartphone	A1303	-	APPLE .Inc	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	MP1000	-	-	-
Micro SD Card	-	-	SanDisk	4 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## 1.6 External I/O Cabling

### ■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Notebook	RJ-45	3.5	S
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button alarm	Alarm OUT	3.0	U
	Audio OUT	Speaker	Audio OUT	1.4	U
	Audio IN	MIC	Audio IN	1.4	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	Smartphone	3.5 mm	0.5	U

\* Unshielded=U, Shielded=S

### ■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.5	S
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button alarm	Alarm OUT	3.0	U
	Audio OUT	Speaker	Audio OUT	1.4	U
	Audio IN	MIC	Audio IN	1.4	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	RJ-45 (LAN)	PoE Adapter	RJ-45 (LAN)	3.0	U
	3.5 mm	Smartphone	3.5 mm	0.5	U

\* Unshielded=U, Shielded=S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (11) of (74)

## 1.7 EUT Operating Mode(s)

Test Mode	operating
DC	the test was conducted while checking the camera video output from the laptop and making sure that they operate normally while performing a ping test.
PoE	


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr


## 1.8 Configuration

■ AC Main  
 □ DC Main

### ■ DC Mode

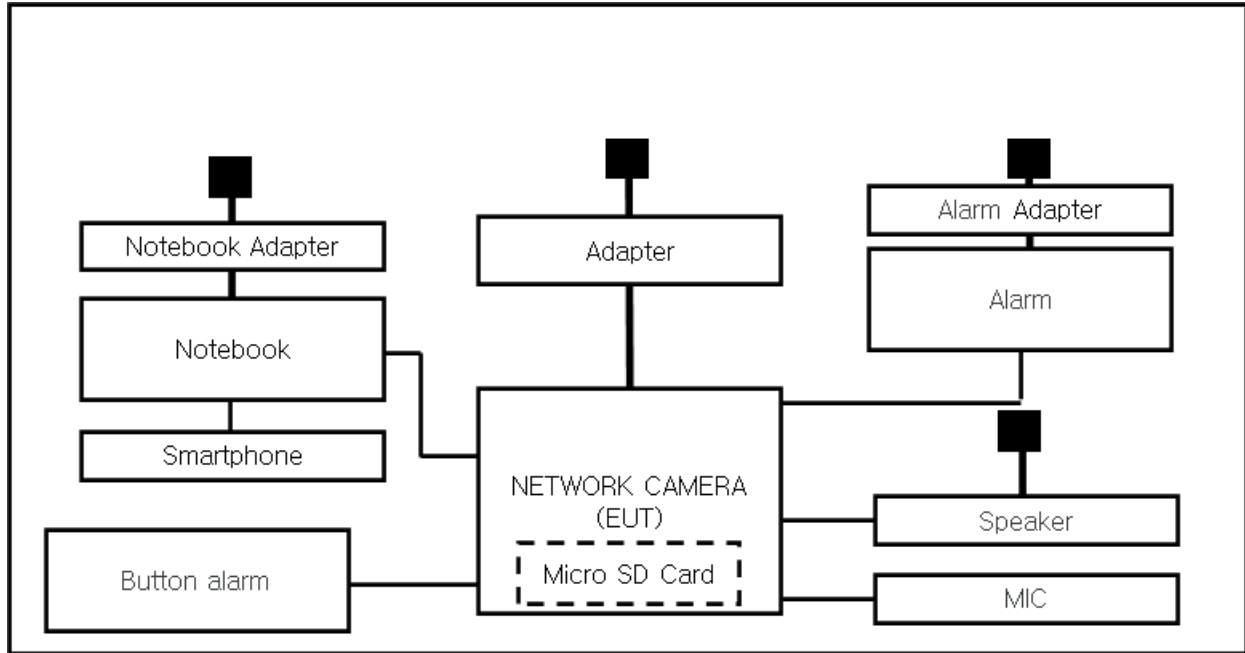

### ■ PoE Mode

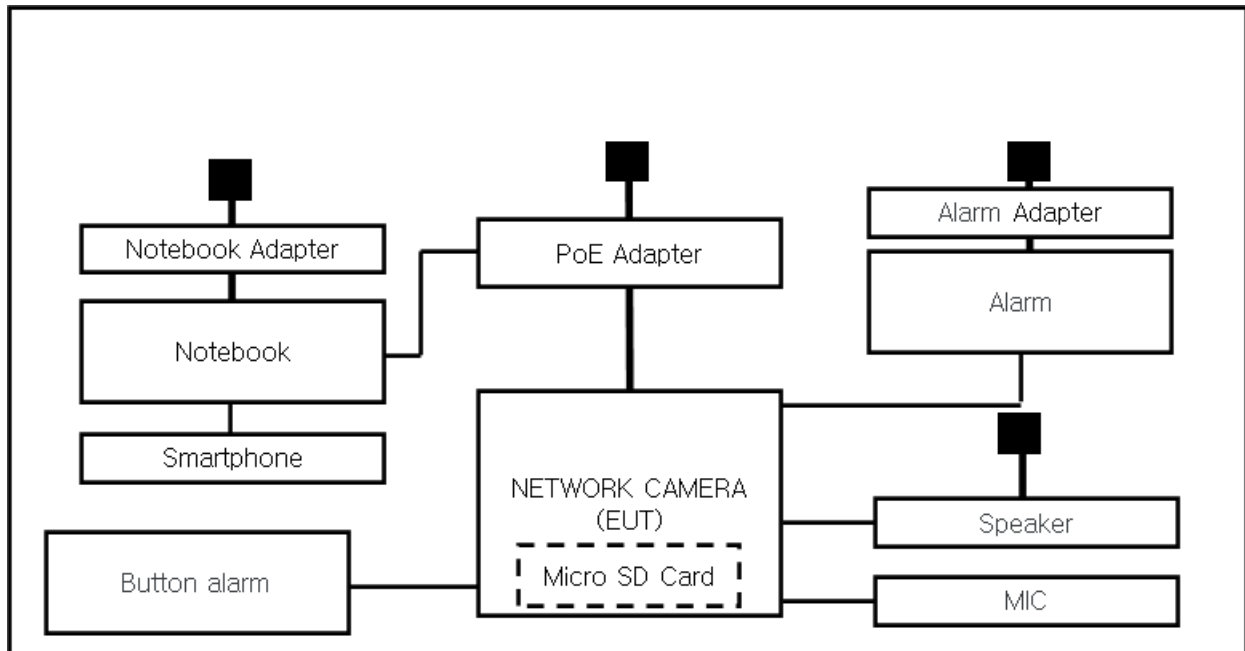

## 1.9 Remarks when standards applied

USB port and VIDEO port are for administrator use and are excluded from testing.







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (15) of (74)

## 2.1 Conducted Emissions at Mains Power Ports

**Test Date**

Feb. 01, 2021

**Test Location**

Electro wave Shieldroom #6

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 29, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

**Test Conditions**

Temperature: 23,3 °C  
Relative Humidity: 40,9 % R.H.

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Feb. 01, 2021

### Test Location

Electro wave Shieldroom #6

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 29, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
<input type="checkbox"/>	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
<input type="checkbox"/>	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
<input checked="" type="checkbox"/>	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2022

### Test Conditions

Temperature: 23,3 °C  
Relative Humidity: 40,9 % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (17) of (74)

## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

**Test Date**

Feb. 01, 2021

**Test Location**☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 10, 2022

**Test Conditions**

Temperature: 21,4 °C

Relative Humidity: 44,6 % R.H.

**Frequency Range of Measurement**

30 MHz to 1 GHz

**Instrument Settings**

IF Band Width: 120 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

### Test Date

Feb. 01, 2021

### Test Location

SEMI ANECHOIC CHAMBER #3

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 20, 2021
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 10, 2022
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

### Test Conditions

Temperature: 21,6 °C  
Relative Humidity: 44,7 % R.H.

### Frequency Range of Measurement

1 GHz to 6 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.5 Harmonic Current Emissions

### Test Date

Feb. 02, 2021

### Test Location

Electro wave Shieldroom #3

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

### Test Conditions

Temperature: 22,6 °C  
Relative Humidity: 42,7 % R.H.

### Classification of Equipment for Harmonic Current Emissions

- ☒ Class A  
☐ Class B  
☐ Class C(Below 25 W)  
☐ Class C(Above 25 W)  
☐ Class D

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.6 Voltage Fluctuations and Flicker

### Test Date

Feb. 02, 2021

### Test Location

Electro wave Shieldroom #3

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

### Test Conditions

Temperature: 22,6 °C  
Relative Humidity: 42,7 % R.H.

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

### 3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:  
EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family  
standard: Immunity requirements for components of fire, intruder and social alarm systems

**The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.**

**If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.**

**A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:**

#### **Electrostatic discharge**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

#### **Radiated electromagnetic fields**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such  
Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT  
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;  
and
- (c) there is no observable deterioration of the picture at 1 V/m.

---

### **Fast transient burst / slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change.

### **Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change,  
and no such flickering of indicators oeuvres at  $U = 130 \text{ dB}\mu\text{V}$ .  
For component of CCTV systems, where the status is monitored by observing the TV picture,  
then deterioration of the picture is allowed at  $U = 140 \text{ dB}\mu\text{V}$ , providing:  
(a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings etc.)  
(b) at  $U = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could  
still be used; and  
(c) there in no observable deterioration of the picture at  $U = 120 \text{ dB}\mu\text{V}$ .

### **Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the conditioning is permissible, providing that there is no  
residual  
change in the EUT or any change in outputs, which could be interpreted by associated  
equipment  
as a change. The EUT shall meet the acceptance criteria for the functional test, after the  
conditioning.

### 3.1 Electrostatic Discharge

#### Reference Standard

EN 61000-4-2:2009

#### Test Date

Feb. 02, 2021

#### Test Location

EMS-ESD: Electro wave Shieldroom #7

#### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	07, 31, 2021
<input checked="" type="checkbox"/>	HCP	-	KES	-	-
<input checked="" type="checkbox"/>	VCP	-	Noise Ken	-	-

#### Test Conditions

Temperature: 22,4 °C  
Relative Humidity: 46,6 % R.H.  
Atmospheric Pressure: 100,4 kPa

#### Test Specifications

Discharge Factor:  $\geq 1$  s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge  
10 at all locations for Contact discharge

Discharge Voltage:	<b>Contact</b> <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV <input checked="" type="checkbox"/> 6 kV <input type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV	<b>Air</b> <input checked="" type="checkbox"/> 2 kV <input checked="" type="checkbox"/> 4 kV <input type="checkbox"/> 6 kV <input checked="" type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV	<b>HCP</b> <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV <input checked="" type="checkbox"/> 6 kV <input type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV	<b>VCP</b> <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV <input checked="" type="checkbox"/> 6 kV <input type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV
--------------------	---	---	---	---

Notes: HCP: Horizontal coupling plane  
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**Location of Discharge:**


Air
Contact




■ DC Mode

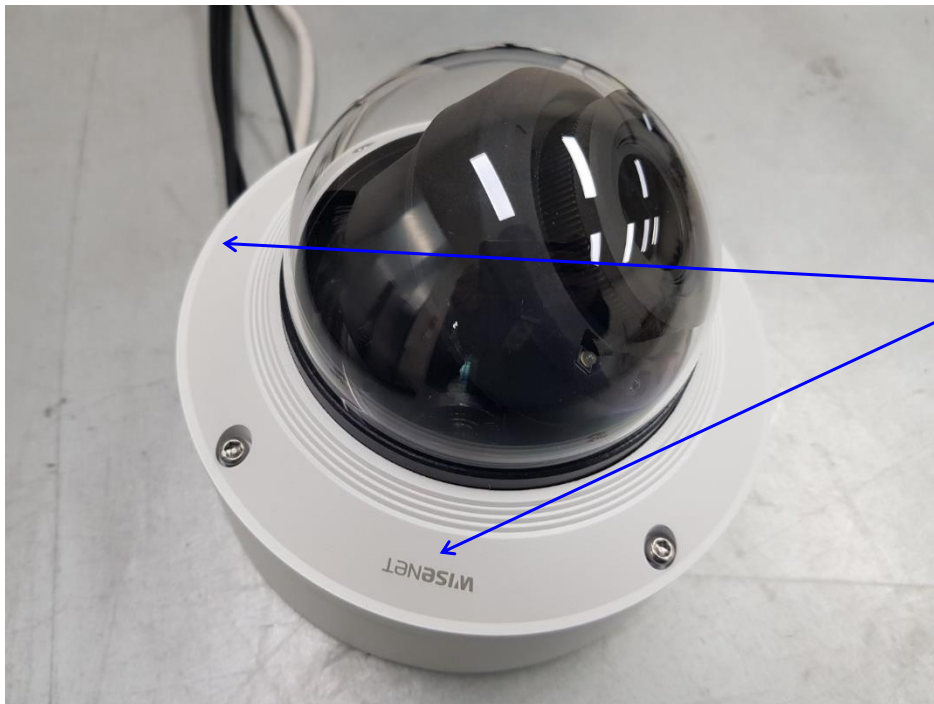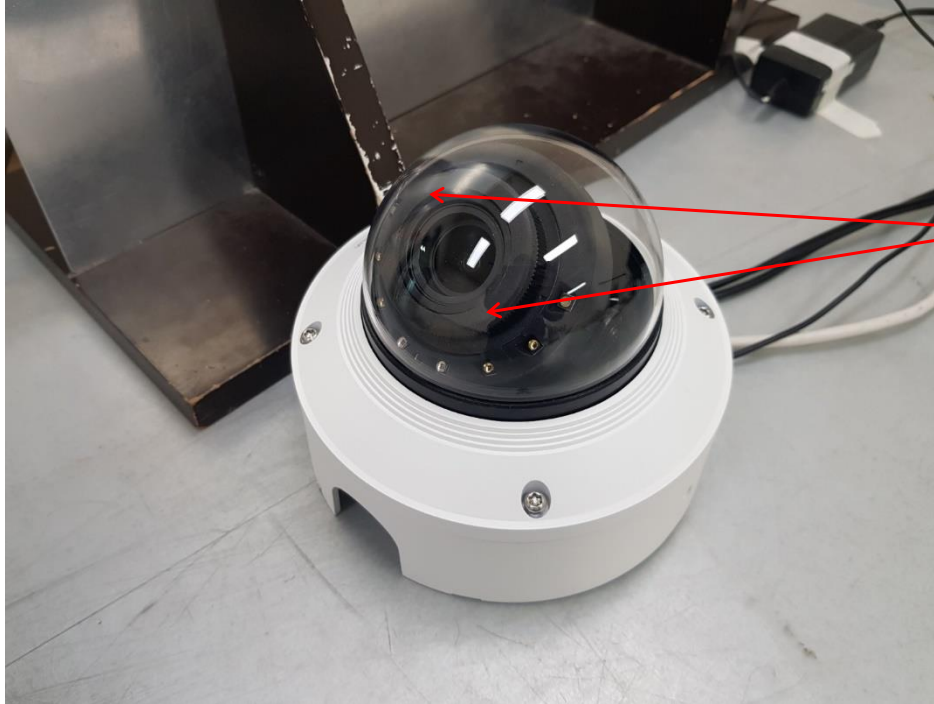

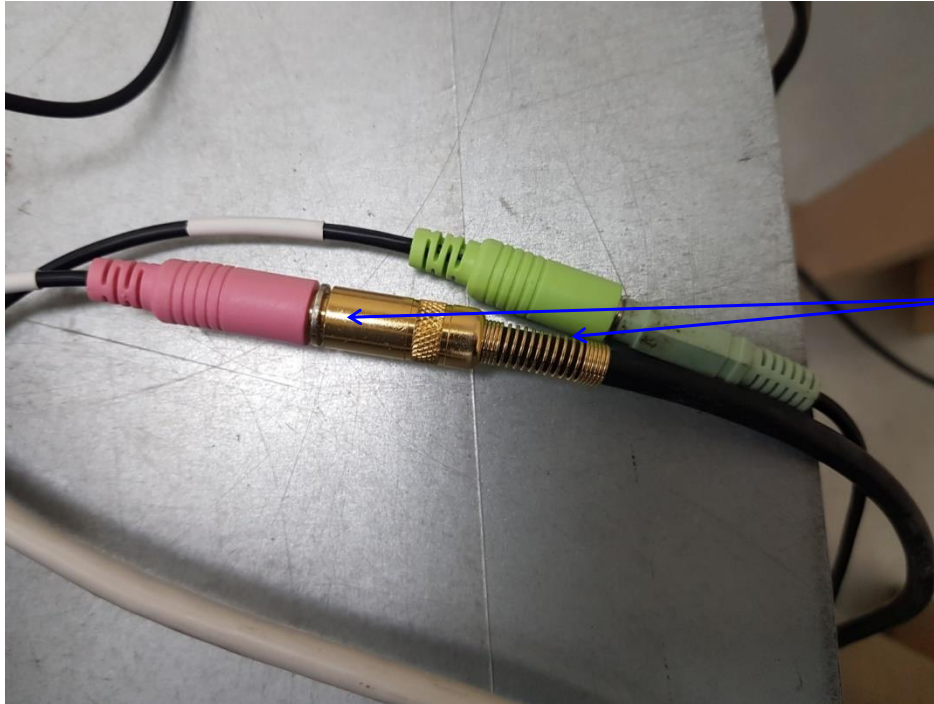


**■ PoE Mode**

2

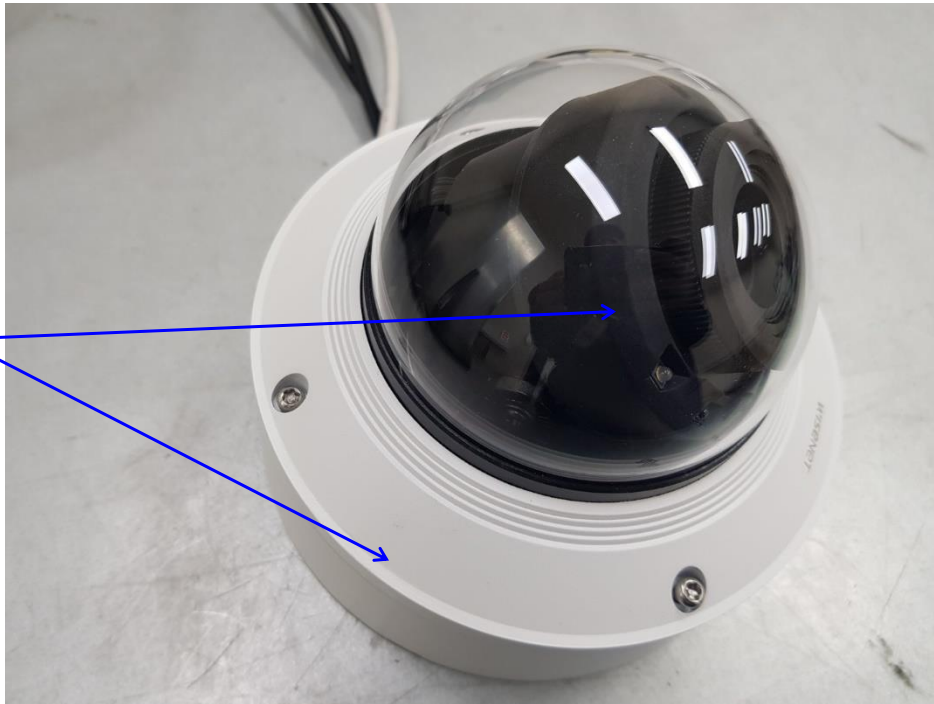

3

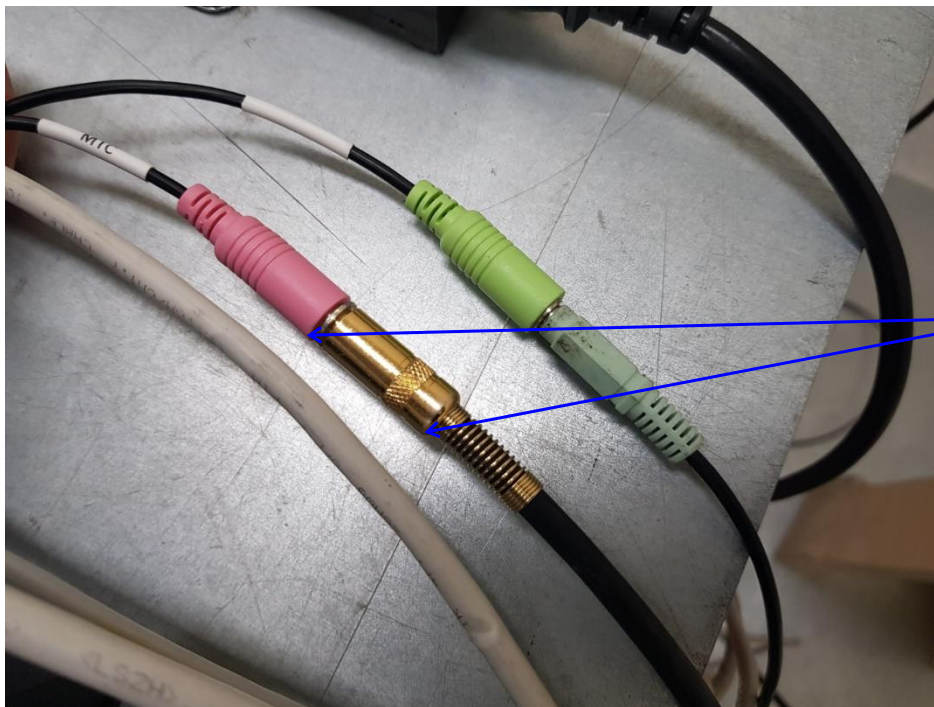

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0186-R2  
Page (27) of (74)

**Test Data****■ DC Mode**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

**Direct Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	Camera lens	Air Discharge	Complied	-
2	Enclosure	Contact Discharge	Complied	-
3	Audio Port	Contact Discharge	Complied	-

**■ PoE Mode****Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

**Direct Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	Camera lens	Air Discharge	Complied	-
2	Enclosure	Contact Discharge	Complied	-
3	Audio Port	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## 3.2 Radiated Electric Field Immunity

**Reference Standard**

EN IEC 61000-4-3:2020

**Test Date**

Feb. 02, 2021

**Test Location**EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2☒ SEMI ANECHOIC CHAMBER #3**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 05, 2021
<input checked="" type="checkbox"/>	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
<input checked="" type="checkbox"/>	POWER METER	E4419B	Agilent	GB40203000	04, 20, 2021
<input checked="" type="checkbox"/>	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 20, 2021
<input checked="" type="checkbox"/>	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 20, 2021
<input checked="" type="checkbox"/>	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

**Test Conditions**

Temperature: 22,6 °C  
Relative Humidity: 42,7 % R.H.  
Atmospheric Pressure: 101,0 kPa



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (29) of (74)

### Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m  
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz  
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

# of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (30) of (74)

**Test Data**

## ■ DC Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

## ■ PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**PASS Required Performance Criteria

### 3.3 Electrical Fast Transients/Bursts

#### Reference Standard

EN 61000-4-4:2012

#### Test Date

Feb. 03, 2021

#### Test Location

EMS-EFT: Electro wave Shieldroom #7

#### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.7	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
<input checked="" type="checkbox"/>	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2021

#### Test Conditions

Temperature: 23,1 °C  
Relative Humidity: 45,4 % R.H.  
Atmospheric Pressure: 100,6 kPa

#### Test Specifications

Pulse Amplitude & Polarity: (AC Power Lines)	<input type="checkbox"/> ± 1.0 kV <input type="checkbox"/> ± 4.0 kV	<input checked="" type="checkbox"/> ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	<input type="checkbox"/> ± 0.5 kV <input type="checkbox"/> ± 2.0 kV	<input checked="" type="checkbox"/> ± 1.0 kV
Burst Period:	<input checked="" type="checkbox"/> 300 ms	<input type="checkbox"/> 2 s
Repetition Rate:	<input type="checkbox"/> 5 kHz	<input checked="" type="checkbox"/> 100 kHz
Duration of Test Voltage:	<input checked="" type="checkbox"/> ≥ 1 min	
Required Performance Criteria:	<input checked="" type="checkbox"/> Complied	



### Test Data

■ DC Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	-	-
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied



■ PoE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	-	-
N	-	-
PE	-	-
L – N	-	-
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (PoE)	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

**Test Results**

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (34) of (74)

### 3.4 Surge Transients

**Reference Standard**

EN 61000-4-5:2014/A1:2017

**Test Date**

Feb. 03, 2021

**Test Location**

EMS-EFT: Electro wave Shieldroom #7

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.7	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
<input checked="" type="checkbox"/>	CDN	CNV 508N1	EM TEST	P1610176296	11, 27, 2021

**Test Conditions**

Temperature: 23,1 °C  
Relative Humidity: 45,4 % R.H.  
Atmospheric Pressure: 100,6 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (35) of (74)

### Test Specifications

#### AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

#### Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min    ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (36) of (74)

**Test Data**☒ DC Mode☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

**Signal Lines**☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(LAN)	CDN	Complied	Complied
	LINE	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (37) of (74)

☒ PoE Mode☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

**Signal Lines**☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria☐ NOT APPLICABLE**Remarks**PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

### 3.5 Conducted Disturbance

#### Reference Standard

EN 61000-4-6:2014

#### Test Date

Feb. 04, 2021

#### Test Location

EMS-CS: Electro wave Shieldroom #6

#### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	icd.control	EM TEST	5.3.11	-
<input checked="" type="checkbox"/>	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 25, 2021
<input checked="" type="checkbox"/>	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 25, 2021
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43694	11, 25, 2021
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43697	11, 25, 2021
<input checked="" type="checkbox"/>	CDN	CDN ST08A	TESEQ	43886	11, 25, 2021
<input checked="" type="checkbox"/>	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 26, 2021

#### Test Conditions

Temperature: 22,7 °C  
Relative Humidity: 44,3 % R.H.  
Atmospheric Pressure: 101,2 kPa

#### Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms  
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave  
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (39) of (74)

**Test Data****■ DC Mode**☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (LAN)	CDN	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (40) of (74)

**■ PoE Mode**☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (PoE)	CDN	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria

**Remarks**PASS Required Performance Criteria



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (41) of (74)

### 3.6 Voltage Dips and Short Interruptions

**Reference Standard**

EN IEC 61000-4-11:2020

**Test Date**

Feb. 03, 2021

**Test Location**

EMS-Voltage dip: Electro wave Shieldroom #7

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.7	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021

**Test Conditions**

Temperature: 23,1 °C  
Relative Humidity: 45,4 % R.H.  
Atmospheric Pressure: 100,6 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (42) of (74)

**Test Specifications & Observations/Remarks**

## ■ DC Mode

## - Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
<input checked="" type="checkbox"/> 20 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Complied</u>
<input checked="" type="checkbox"/> 30 % dip	<input checked="" type="checkbox"/> 25 / 500	<u>Complied</u>
<input checked="" type="checkbox"/> 60 % dip	<input checked="" type="checkbox"/> 10 / 200	<u>Complied</u>
<input checked="" type="checkbox"/> 100 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Degradation</u>

## - Voltage variations

<input checked="" type="checkbox"/> Unom + 10 %	<input checked="" type="checkbox"/> 253.0 V (ac)	<u>Complied</u>
<input checked="" type="checkbox"/> Unom - 15 %	<input checked="" type="checkbox"/> 195.5 V (ac)	<u>Complied</u>

## Observations:

Complied – No degradation of function

Degradation - See "Remarks "

**Test Results**

- ☒ PASS Required Performance Criteria  
☐ NOT PASS Required Performance Criteria  
☐ NOT APPLICABLE

**Remarks**

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.

## APPENDIX A – TEST DATA

### Conducted Emissions at Mains Power Ports

■ DC Mode

[HOT]

#### Common Information

Test Description:

Conducted Emission

Model No.:

PND-A6081RV


Phase:

L1

Mode:

Operator Name:

KES

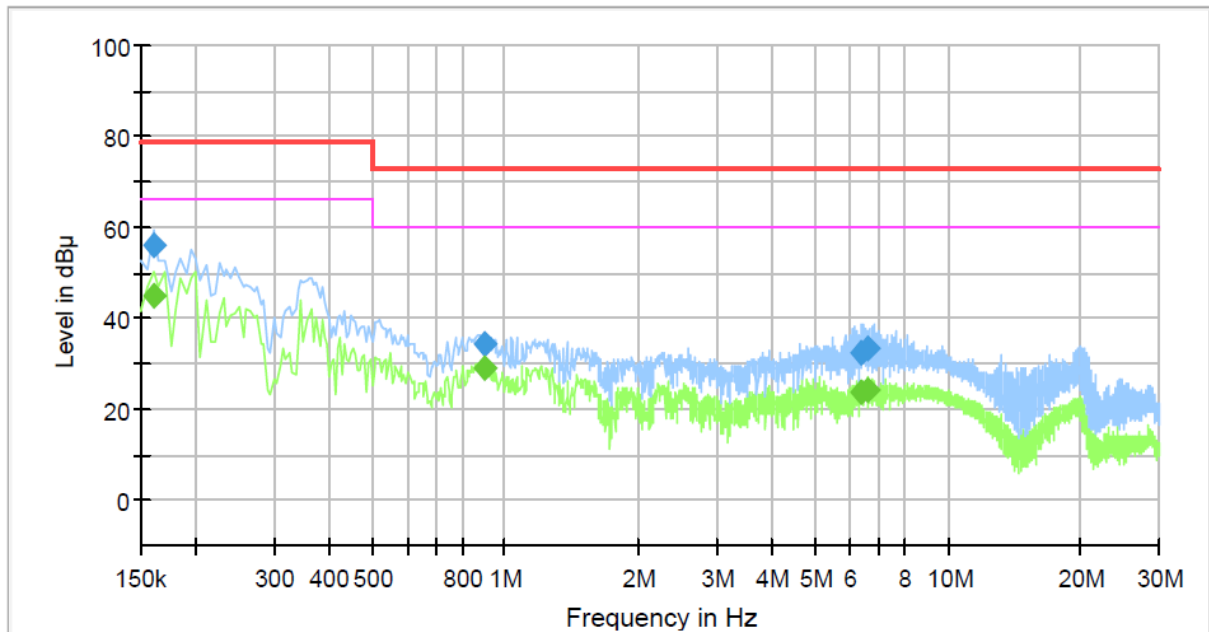


#### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	45.14	66.00	20.86	1000.0	9.000	L1	19.4
0.160000	56.18	---	79.00	22.82	1000.0	9.000	L1	19.4
0.900000	---	29.03	60.00	30.97	1000.0	9.000	L1	20.0
0.900000	34.17	---	73.00	38.83	1000.0	9.000	L1	20.0
6.355000	---	23.68	60.00	36.32	1000.0	9.000	L1	19.5
6.355000	32.61	---	73.00	40.39	1000.0	9.000	L1	19.5
6.580000	---	24.36	60.00	35.64	1000.0	9.000	L1	19.5
6.580000	33.63	---	73.00	39.37	1000.0	9.000	L1	19.5

## [NEUTRAL]

### Common Information

Test Description:	Conducted Emission
Model No.:	PND-A6081RV
Phase:	N
Mode:	
Operator Name:	KES

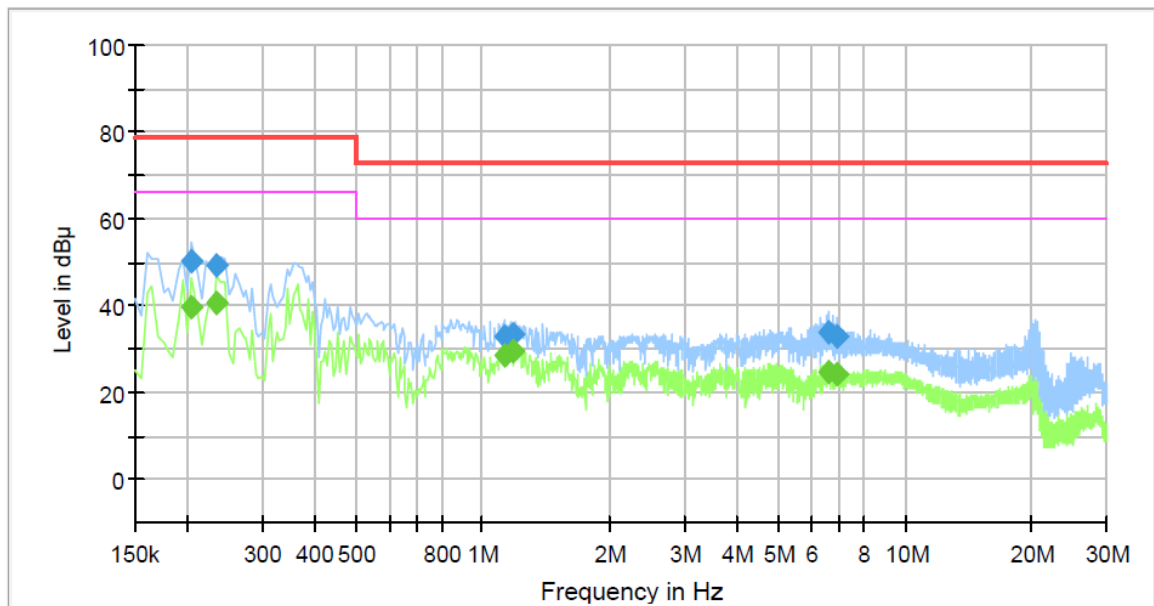

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.205000	---	39.59	66.00	26.41	1000.0	9.000	N	19.4
0.205000	50.37	---	79.00	28.63	1000.0	9.000	N	19.4
0.235000	---	40.62	66.00	25.38	1000.0	9.000	N	19.4
0.235000	49.37	---	79.00	29.63	1000.0	9.000	N	19.4
1.125000	---	28.60	60.00	31.40	1000.0	9.000	N	20.0
1.125000	32.84	---	73.00	40.16	1000.0	9.000	N	20.0
1.175000	---	29.52	60.00	30.48	1000.0	9.000	N	20.0
1.175000	33.57	---	73.00	39.43	1000.0	9.000	N	20.0
6.555000	---	24.61	60.00	35.39	1000.0	9.000	N	19.5
6.555000	33.76	---	73.00	39.24	1000.0	9.000	N	19.5
6.905000	---	24.25	60.00	35.75	1000.0	9.000	N	19.5
6.905000	32.82	---	73.00	40.18	1000.0	9.000	N	19.5

#### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr


## Conducted Emissions at Telecommunication Ports

■ DC Mode

[1 000 Mbps]

### Common Information

Test Description:	Telecommunication Emission
Model No.:	PND-A6081RV
Mode :	DC_TEL 1 000 Mbps
Speed :	
Operator Name:	KES

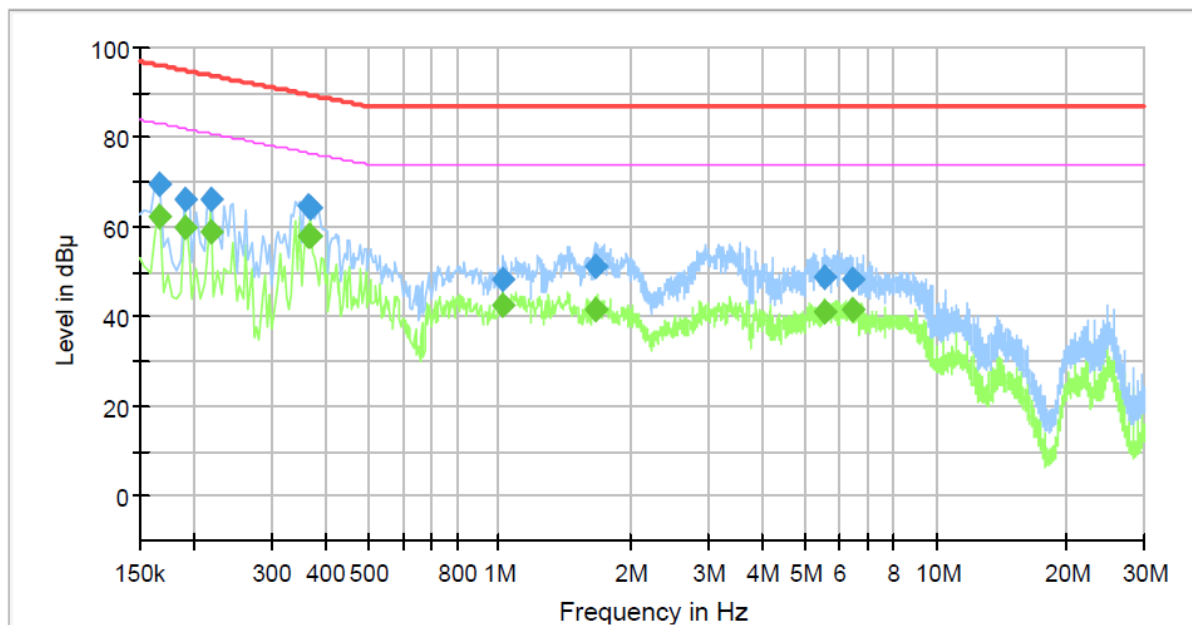

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.166000	---	62.58	83.16	20.58	1000.0	9.000	Single Line	19.5
0.166000	69.57	---	96.16	26.59	1000.0	9.000	Single Line	19.5
0.190000	66.46	---	95.04	28.58	1000.0	9.000	Single Line	19.5
0.190000	---	59.91	82.04	22.13	1000.0	9.000	Single Line	19.5
0.218000	---	59.04	80.89	21.85	1000.0	9.000	Single Line	19.5
0.218000	66.31	---	93.89	27.58	1000.0	9.000	Single Line	19.5
0.366000	---	58.07	76.59	18.52	1000.0	9.000	Single Line	19.6
0.366000	64.68	---	89.59	24.91	1000.0	9.000	Single Line	19.6
0.370000	64.41	---	89.50	25.09	1000.0	9.000	Single Line	19.6
0.370000	---	57.99	76.50	18.51	1000.0	9.000	Single Line	19.6
1.022000	---	42.52	74.00	31.48	1000.0	9.000	Single Line	19.9
1.022000	48.42	---	87.00	38.58	1000.0	9.000	Single Line	19.9
1.654000	---	41.83	74.00	32.17	1000.0	9.000	Single Line	20.1
1.654000	51.16	---	87.00	35.84	1000.0	9.000	Single Line	20.1
5.574000	48.89	---	87.00	38.11	1000.0	9.000	Single Line	19.5
5.574000	---	41.37	74.00	32.63	1000.0	9.000	Single Line	19.5
6.454000	48.39	---	87.00	38.61	1000.0	9.000	Single Line	19.4
6.454000	---	41.48	74.00	32.52	1000.0	9.000	Single Line	19.4


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

**PoE Mode**
**[1 000 Mbps]**
**Common Information**

Test Description: Telecommunication Emission  
Model No.: PND-A6081RV  
Mode : PoE\_TEL 1 000 Mbps  
Speed :  
Operator Name: KES

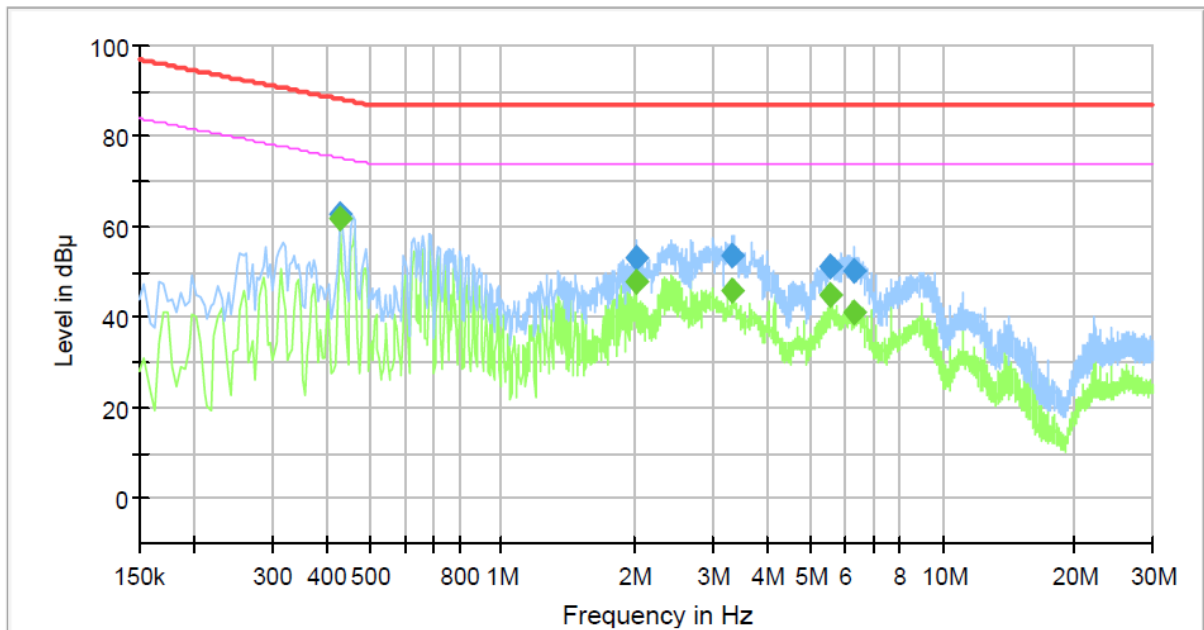
**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.430000	---	61.72	75.25	13.53	1000.0	9.000	Single Line	19.6
0.430000	62.90	---	88.25	25.35	1000.0	9.000	Single Line	19.6
2.014000	---	47.74	74.00	26.26	1000.0	9.000	Single Line	20.2
2.014000	53.24	---	87.00	33.76	1000.0	9.000	Single Line	20.2
3.346000	---	46.13	74.00	27.87	1000.0	9.000	Single Line	19.9
3.346000	53.70	---	87.00	33.30	1000.0	9.000	Single Line	19.9
5.542000	---	45.16	74.00	28.84	1000.0	9.000	Single Line	19.5
5.542000	51.06	---	87.00	35.94	1000.0	9.000	Single Line	19.5
6.318000	---	41.38	74.00	32.62	1000.0	9.000	Single Line	19.4
6.318000	50.18	---	87.00	36.82	1000.0	9.000	Single Line	19.4

**◆ Calculation**

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Report No.:

KES-EM-21T0186-R2

Page (47) of (74)

## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC Mode

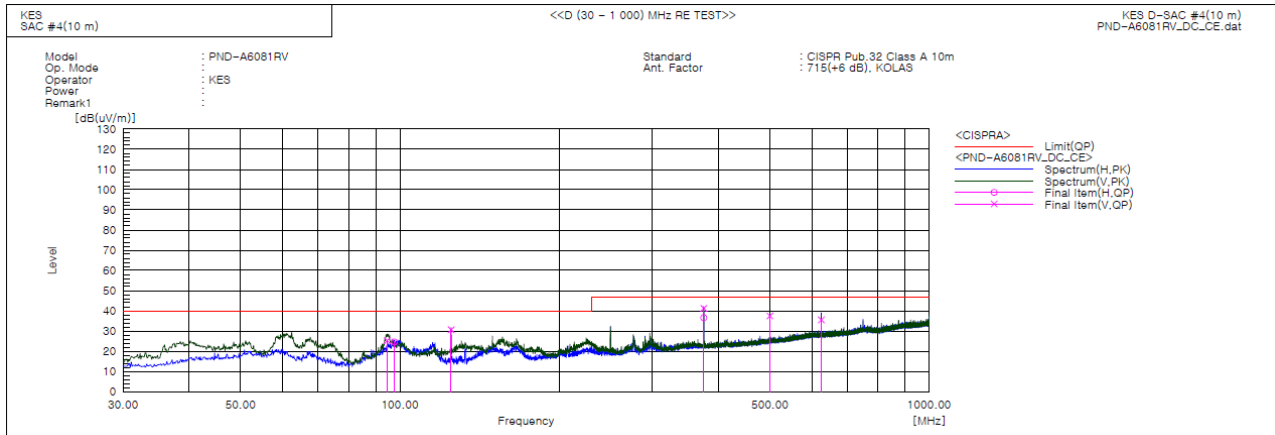

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	94.626	V	48.9	-23.6	25.3	40.0	14.7	108.0	197.0	
2	97.658	H	47.5	-22.9	24.6	40.0	15.4	391.0	321.0	
3	124.939	V	55.5	-24.8	30.7	40.0	9.3	147.0	7.0	
4	374.956	V	56.1	-14.8	41.3	47.0	5.7	109.0	19.0	
5	374.956	H	51.4	-14.8	36.6	47.0	10.4	391.0	294.0	
6	499.965	V	49.1	-11.6	37.5	47.0	9.5	112.0	341.0	
7	624.974	V	43.8	-8.2	35.6	47.0	11.4	398.0	210.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr




## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0186-R2  
Page (48) of (74)

### PoE Mode

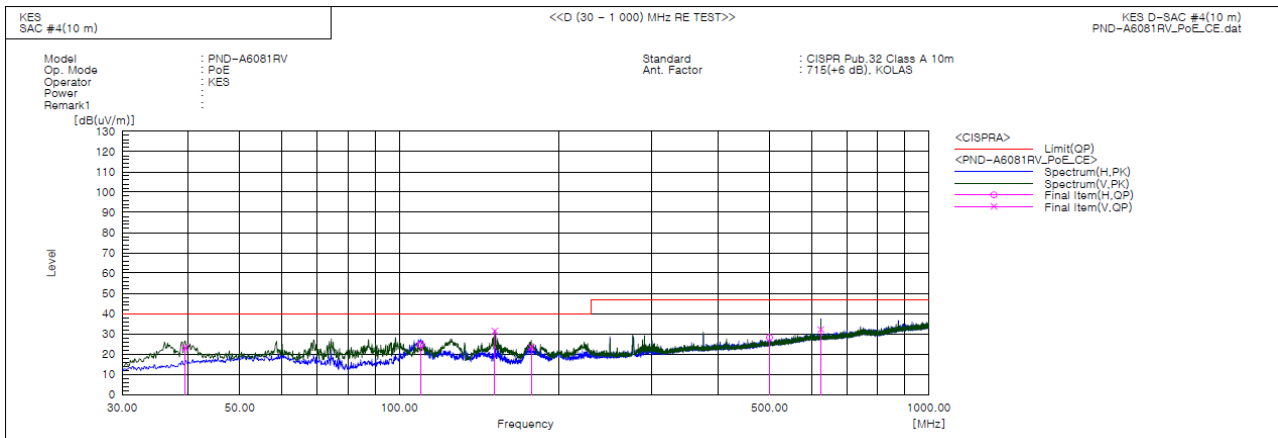

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.458	V	46.1	-22.9	23.2	40.0	16.8	114.0	292.0	
2	109.783	H	46.9	-22.3	24.6	40.0	15.4	389.0	287.0	
3	151.493	V	56.4	-25.0	31.4	40.0	8.6	108.0	8.0	
4	177.561	V	46.9	-23.6	23.3	40.0	16.7	116.0	169.0	
5	499.965	H	39.7	-11.6	28.1	47.0	18.9	197.0	107.0	
6	624.974	V	40.4	-8.2	32.2	47.0	14.8	112.0	139.0	

### ◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB( $\mu$ V/m)] = (Reading(QP)[dB( $\mu$ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB( $\mu$ V/m)] - Result(QP) [dB( $\mu$ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value





## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Report No.:

KES-EM-21T0186-R2

Page (49) of (74)

## Radiated Electric Field Emissions(Above 1 GHz)

### ■ DC Mode

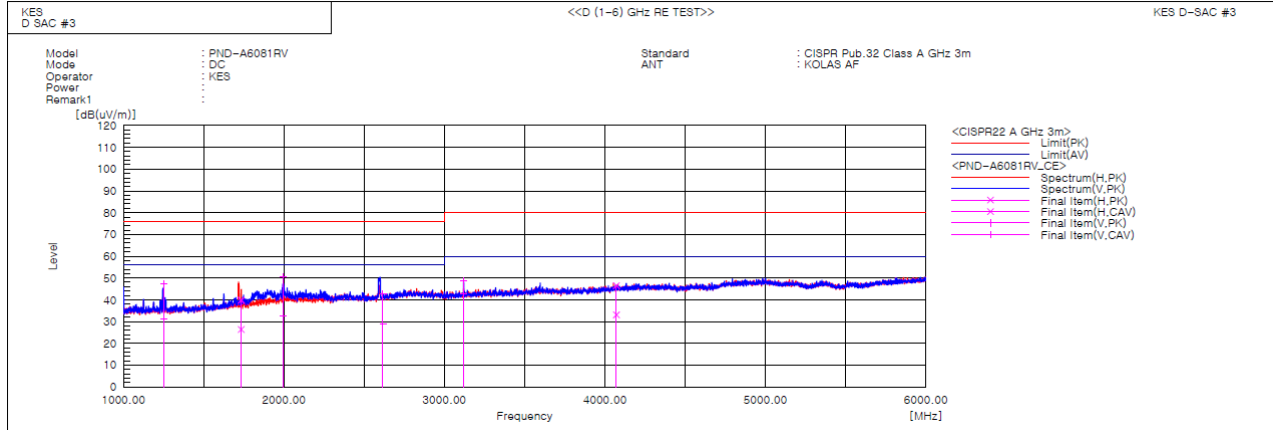

### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1249.870	V	55.1	39.3	-7.9	47.2	31.4	76.0	56.0	28.8	24.6	100.0	217.4	
2	1733.297	H	43.9	30.5	-4.1	39.8	26.4	76.0	56.0	36.2	29.6	100.0	264.4	
3	1995.320	V	52.0	34.2	-1.6	50.4	32.6	76.0	56.0	25.6	23.4	100.0	354.4	
4	2616.457	V	42.3	28.6	0.4	42.7	29.0	76.0	56.0	33.3	27.0	100.0	291.0	
5	3120.010	V	46.6	40.7	2.1	48.7	42.8	80.0	60.0	31.3	17.2	100.0	354.1	
6	4071.746	H	40.6	27.2	5.9	46.5	33.1	80.0	60.0	33.5	26.9	100.0	26.2	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr




## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0186-R2  
Page (50) of (74)

### ■ PoE Mode

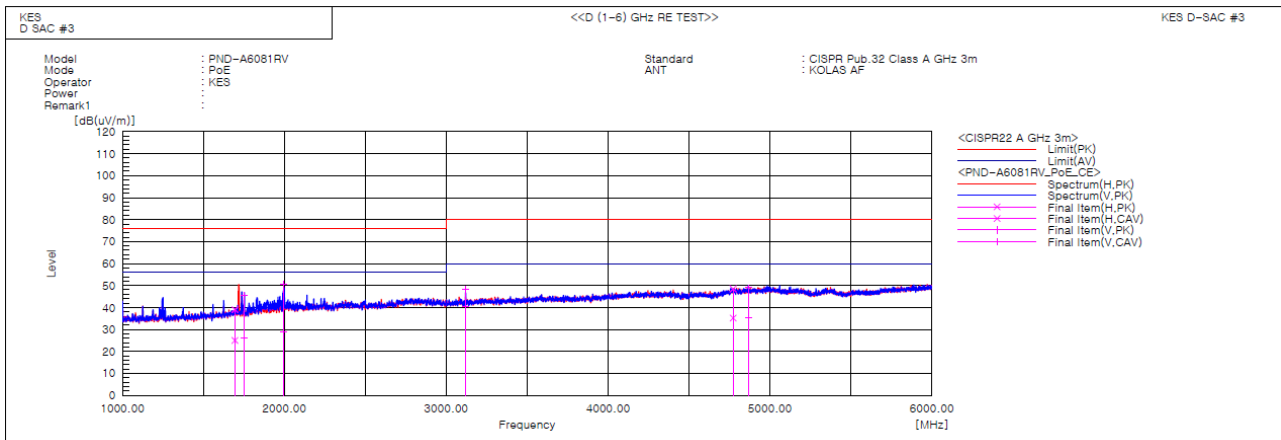

#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1693.705	H	43.5	29.5	-4.5	39.0	25.0	76.0	56.0	37.0	31.0	100.0	178.7	
2	1748.928	V	49.5	30.1	-4.0	45.5	26.1	76.0	56.0	30.5	29.9	100.0	343.5	
3	1991.741	V	52.2	30.6	-1.6	50.6	29.0	76.0	56.0	25.4	27.0	100.0	351.4	
4	3120.260	V	46.2	38.2	2.1	48.3	40.3	80.0	60.0	31.7	19.7	100.0	349.4	
5	4772.811	H	40.1	26.8	8.4	48.5	35.2	80.0	60.0	31.5	24.8	100.0	89.5	
6	4869.559	V	40.1	26.5	8.9	49.0	35.4	80.0	60.0	31.0	24.6	100.0	210.0	

### ◆ Calculation

Result(PK/CAV) [dB( $\mu$ V/m)] = (Reading(PK/CAV)[dB( $\mu$ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB( $\mu$ V/m)] - Result(PK/CAV) [dB( $\mu$ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## Harmonic Current Emissions and Voltage Fluctuations and Flicker

### Average harmonic current results

Hn	I <sub>eff</sub> [A]	% of Limit	Limit [A]	Result
1	0.037			
2	0.002	0.162	1.080	n/a
3	0.030	1.314	2.300	PASS
4	0.002	0.522	0.430	n/a
5	0.031	2.711	1.140	PASS
6	0.002	0.606	0.300	n/a
7	0.031	3.998	0.770	PASS
8	0.002	0.793	0.230	n/a
9	0.029	7.151	0.400	PASS
10	0.002	1.043	0.184	n/a
11	0.027	8.254	0.330	PASS
12	0.002	1.196	0.153	n/a
13	0.026	12.339	0.210	PASS
14	0.002	1.408	0.131	n/a
15	0.024	16.081	0.150	PASS
16	0.002	1.484	0.115	n/a
17	0.023	17.006	0.132	PASS
18	0.002	1.626	0.102	n/a
19	0.021	17.554	0.118	PASS
20	0.002	1.798	0.092	n/a
21	0.019	11.770	0.161	PASS
22	0.002	1.933	0.084	n/a
23	0.017	11.615	0.147	PASS
24	0.002	2.078	0.077	n/a
25	0.015	11.320	0.135	PASS
26	0.001	2.101	0.071	n/a
27	0.014	10.921	0.125	PASS
28	0.002	2.314	0.066	n/a
29	0.012	10.025	0.116	PASS
30	0.001	2.321	0.061	n/a
31	0.010	9.277	0.109	PASS
32	0.001	2.435	0.058	n/a
33	0.009	8.474	0.102	PASS
34	0.001	2.573	0.054	n/a
35	0.007	7.272	0.096	PASS
36	0.001	2.542	0.051	n/a
37	0.006	6.492	0.091	PASS
38	0.001	2.731	0.048	n/a
39	0.005	5.457	0.087	n/a
40	0.001	2.673	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

\* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

**Maximum harmonic current results**

Hn	I <sub>eff</sub> [A]	% of Limit	Limit [A]	Result
1	0.038			
2	0.002	0.128	1.620	n/a
3	0.031	0.889	3.450	PASS
4	0.003	0.397	0.645	n/a
5	0.031	1.817	1.710	PASS
6	0.002	0.458	0.450	n/a
7	0.031	2.682	1.155	PASS
8	0.002	0.600	0.345	n/a
9	0.029	4.815	0.600	PASS
10	0.002	0.775	0.276	n/a
11	0.027	5.547	0.495	PASS
12	0.002	0.903	0.230	n/a
13	0.026	8.265	0.315	PASS
14	0.002	1.085	0.197	n/a
15	0.024	10.773	0.225	PASS
16	0.002	1.138	0.173	n/a
17	0.023	11.441	0.199	PASS
18	0.002	1.258	0.153	n/a
19	0.021	11.797	0.178	PASS
20	0.002	1.379	0.138	n/a
21	0.019	11.826	0.161	PASS
22	0.002	1.486	0.125	n/a
23	0.017	11.694	0.147	PASS
24	0.002	1.606	0.115	n/a
25	0.015	11.378	0.135	PASS
26	0.002	1.645	0.106	n/a
27	0.014	11.009	0.125	PASS
28	0.002	1.795	0.099	n/a
29	0.012	10.134	0.116	PASS
30	0.002	1.857	0.092	n/a
31	0.010	9.375	0.109	PASS
32	0.002	1.860	0.086	n/a
33	0.009	8.579	0.102	PASS
34	0.002	1.960	0.081	n/a
35	0.007	7.403	0.096	PASS
36	0.002	2.027	0.077	n/a
37	0.006	6.628	0.091	PASS
38	0.002	2.104	0.073	n/a
39	0.005	5.572	0.087	n/a
40	0.001	2.012	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

\* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0186-R2

Page (53) of (74)

Test Data - Voltage Fluctuations

**Maximum Flicker results**

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Test Setup Photos and Configuration

### Conducted Emissions at Mains Power Ports

#### ■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Conducted Emissions at Telecommunication Ports

### ■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## ■ PoE Mode






## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## ■ PoE Mode

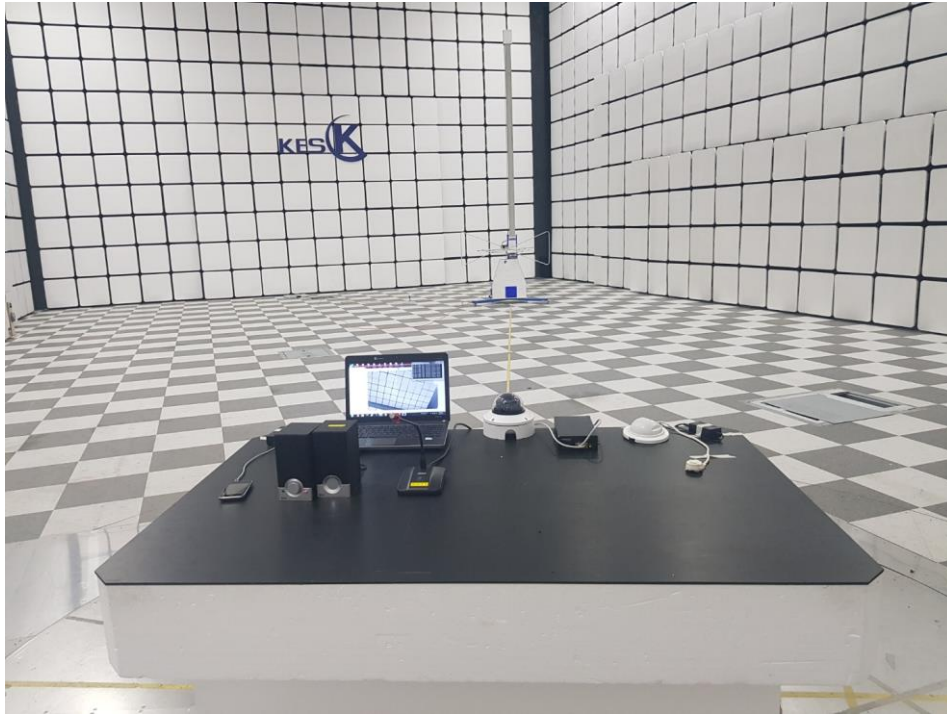

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Above 1 GHz)


### ■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## ■ PoE Mode

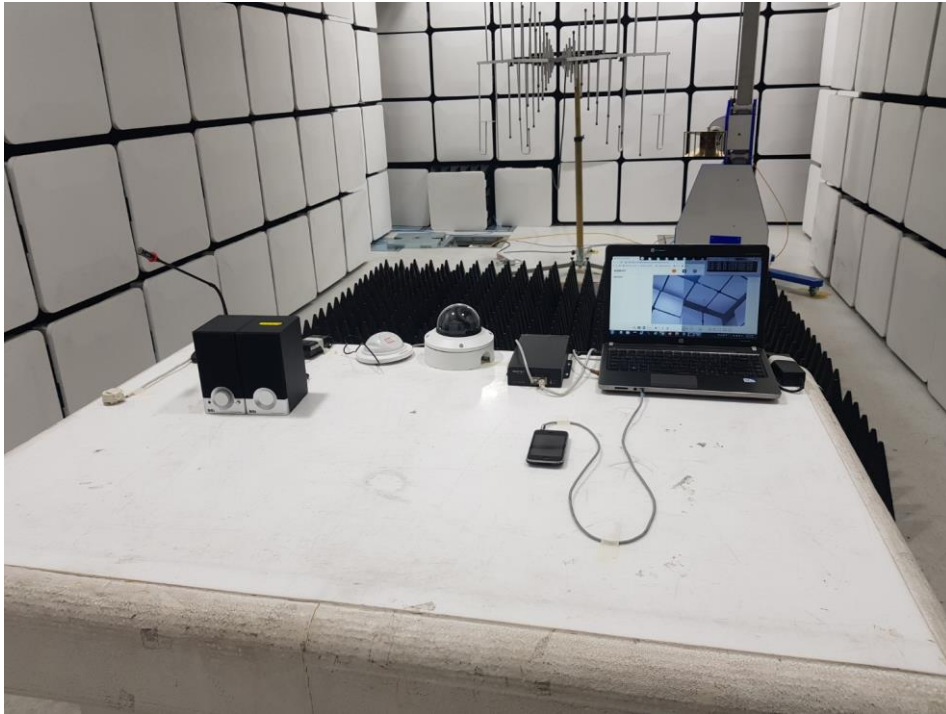

## Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ DC Mode



## Electrostatic Discharge

### ■ DC Mode



### ■ PoE Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Immunity

### ■ DC Mode



### ■ PoE Mode

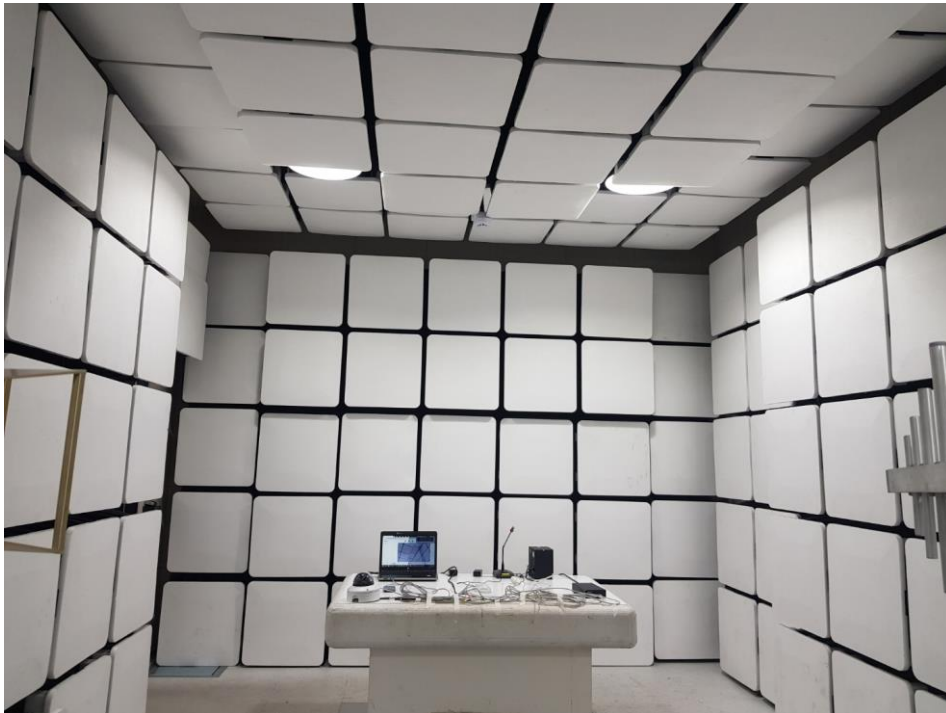

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr




## Electrical Fast Transients/Bursts

### ■ DC Mode



### ■ PoE Mode

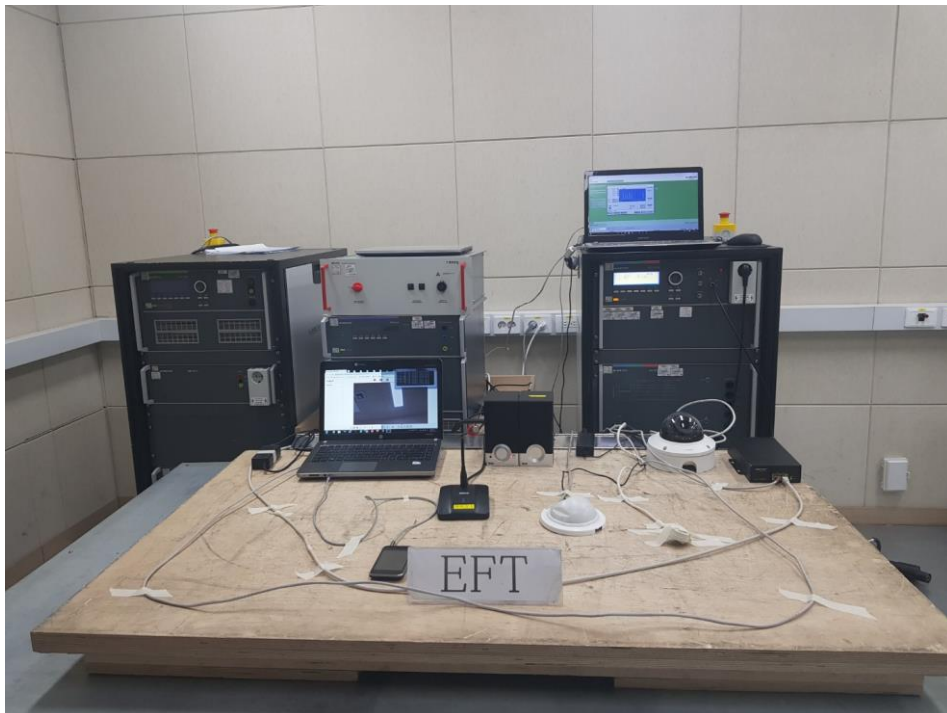

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## Surge Transients

### ■ DC Mode



### ■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Conducted Disturbance

### ■ DC Mode



### ■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Voltage Dips and Short Interruptions

### ■ DC Mode



## EUT External Photographs

(Top)



(Bottom)






## EUT Internal Photographs

(Internal View)




## EUT Internal View – Main Board

(Top)

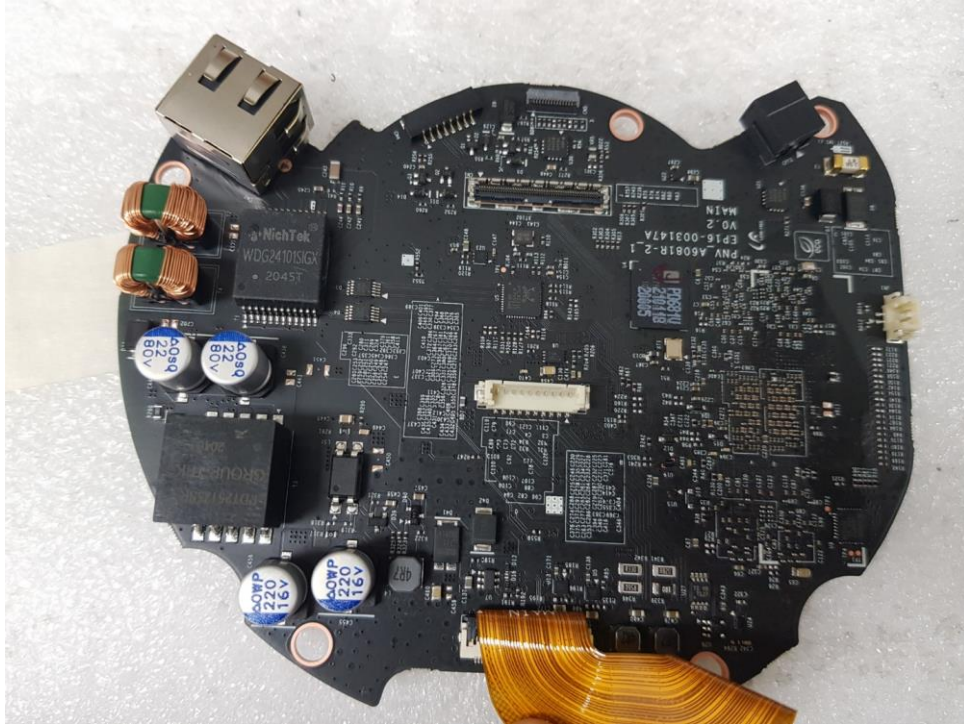


(Bottom)

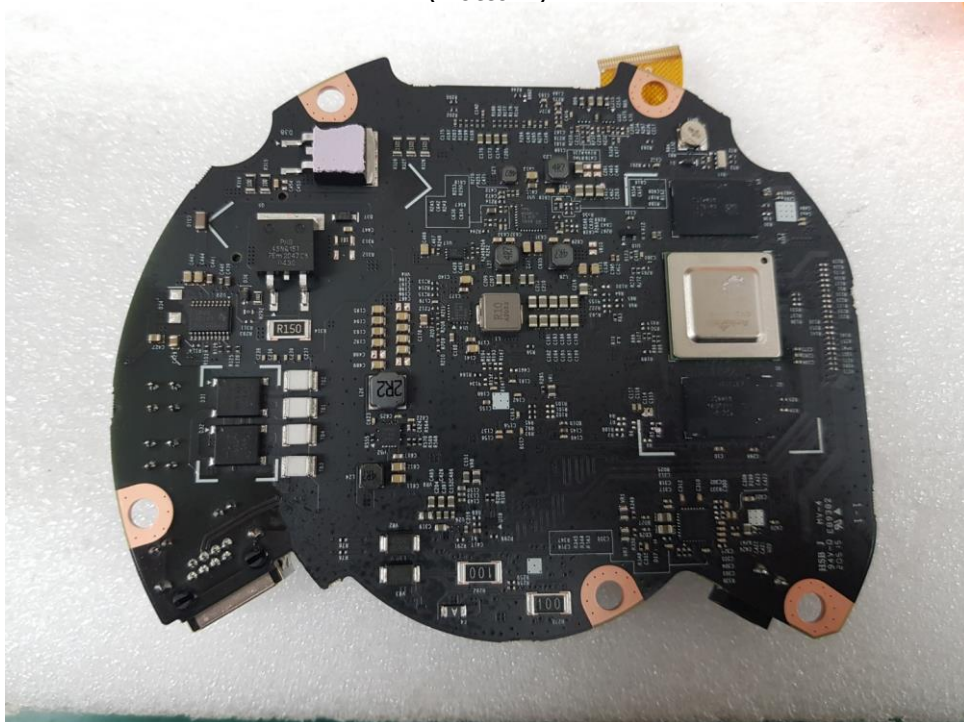

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 1

(Top)

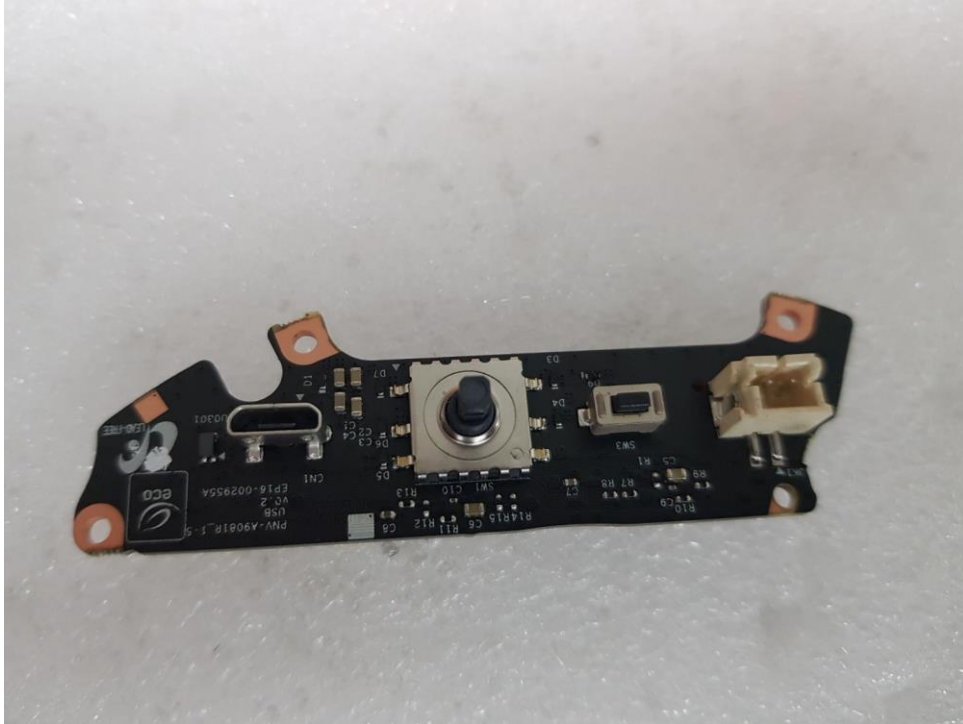

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## EUT Internal View – Sub Board 2

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## EUT Internal View – Lens

(Top)



(Bottom)



## Label and Location

**NETWORK CAMERA**

Model No : PND-A6081RV

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

