


# ITECH C1 302 M DATA 2



|   |  |
|---|--|
| Catalog number  | TM-IT.C1DDM360W  |
| Application   | escape route lighting  |
| Duration time   | 3 h  |
| Operating mode  | M  |
| Version   | DD - DATA2   |
| Colour  | RAL9003  |
| Luminous flux   | 238 lm   |
| Maximum light power (the luminaire can power the light source with a different power) | 2 W  |
| Active power  | 6.4 W  |
| Power supply  | 210+250 V AC 50+60 Hz  |
| Power supply CB   | 186+254 V DC   |
| Dimming mode  | yes  |
| Temperature range   | 10-40 °C   |
| Material  | PC   |
| IP  | IP65   |
| IK  | IK06   |
| Battery   | LiFePO4/C 6.4V 1.5Ah   |
| Warranty  | 24 months - ST<br>36 months - AT<br>60 months - DATA, CB   |
| LED Lifetime  | 50 000 work hour   |
| Appliance classes   | 2  |
| Standards   | PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838 |



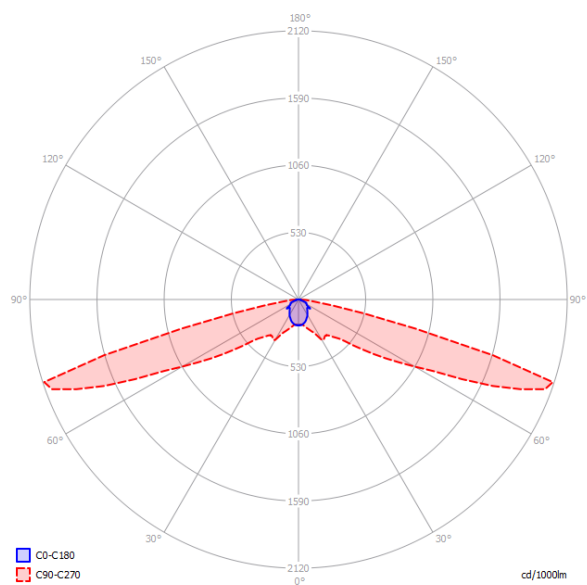

## PHOTOMETRY [m]

| Ceiling height | Distance wall - fitting | Distance fitting - fitting |
|----------------|-------------------------|----------------------------|
| 2,5            | 8,6                     | 19,2                       |
| 3,0            | 9,6                     | 22,0                       |
| 4,0            | 11,0                    | 26,5                       |
| 5,0            | 9,2                     | 29,5                       |
| 6,0            | 4,5                     | 27,5                       |
| 7,0            | 3,5                     | 22,0                       |
| 8,0            |                         |                            |
| 9,0            |                         |                            |
| 10,0           |                         |                            |

