


ITECH C1

302 M DATA 2 COLD



Catalog number	TM-IT.C1DDM36CW
Application	escape route lighting
Duration time	3 h
Operating mode	M
Version	DD - DATA2
Colour	RAL9003
Luminous flux	238 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.4 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	-15-40 °C
Material	PC
IP	IP65
IK	IK06
COLD	yes
Battery	LiFePO4/C 6.4V 3.0Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



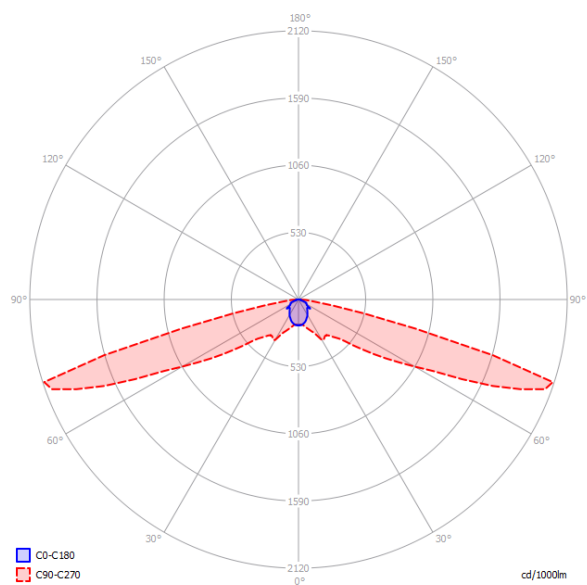

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	8,6	19,2
3,0	9,6	22,0
4,0	11,0	26,5
5,0	9,2	29,5
6,0	4,5	27,5
7,0	3,5	22,0
8,0		
9,0		
10,0		

