



# TM.ONTEC C C1 180 NM AT



Catalog number	TM-OC.C1ATN800W
Application	escape route lighting
Duration time	3 h
Operating mode	NM
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	140 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
IP	IP20
IK	IK03
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

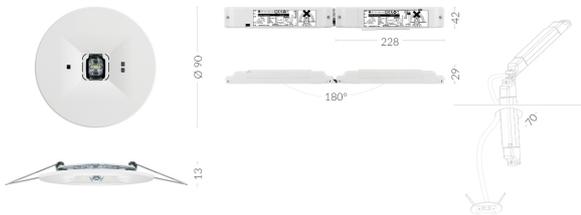

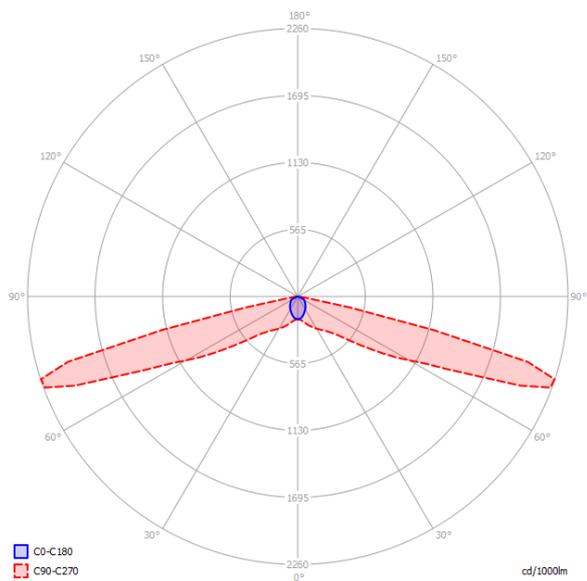

## PHOTOMETRY [m]

### Ceiling height

2,5  
3,0  
4,0  
5,0  
6,0  
7,0  
8,0  
9,0  
10,0

### Distance wall - fitting

9,5 - 1h/CB | 8,5 - 3h  
11,0 - 1h/CB | 9,0 - 3h  
13,0 - 1h/CB | 7,5 - 3h  
13,5 - 1h/CB | 3,0 - 3h  
10,5 - 1h/CB | 3,0 - 3h  
5,0 - 1h/CB  
3,0 - 1h/CB  
4,0 - 1h/CB  
/

### Distance fitting - fitting

21,0 - 1h/CB | 19,0 - 3h  
24,0 - 1h/CB | 21,0 - 3h  
29,0 - 1h/CB | 23,0 - 3h  
32,0 - 1h/CB | 20,0 - 3h  
34,0 - 1h/CB | 14,0 - 3h  
32,0 - 1h/CB  
26,0 - 1h/CB  
19,0 - 1h/CB  
/

