


# TM.ONTEC C C1H 303 M DATA 2



Catalog number	TM-OC.CHDDM300W
Application	escape route lighting
Duration time	3 h
Operating mode	M
Version	DD - DATA2
Colour	RAL9003
Luminous flux	353 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	8.6 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-35 °C
Material	PC
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 3.0Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



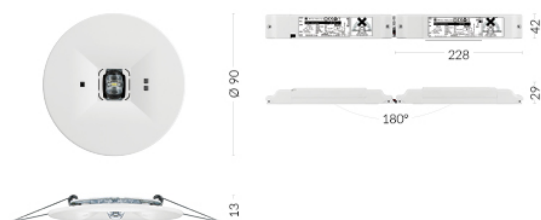

## PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	9,7	21,0
3,0	10,9	24,0
4,0	12,9	29,6
5,0	14,1	34,3
6,0	11,5	36,0
7,0	6,5	36,5
8,0	4,9	28,0
9,0	4,7	23,5
10,0	4,5	15,5

