



TM.ONTEC C M1 180 NM AT



Catalog number	TM-OC.M1ATN800W
Application	anti-panic lighting
Duration time	3 h
Operating mode	NM
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	167 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
IP	IP20
IK	IK03
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

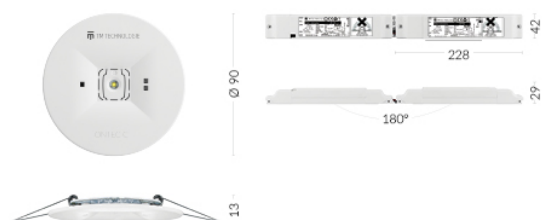

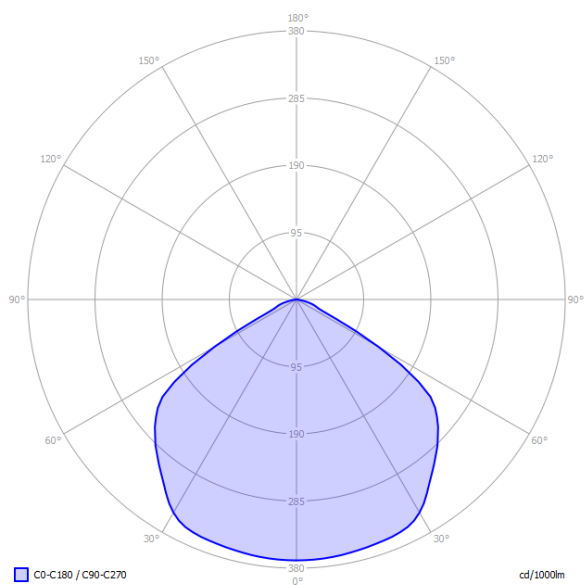

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

3,5 - 1h/CB | 3,0 - 3 h
4,0 - 1h/CB | 3,5 - 3 h
5,0 - 1h/CB | 4,0 - 3h
5,5 - 1h/CB | 4,5 - 3h
5,5 - 1h/CB | 4,0 - 3h
6,0 - 1h/CB | 3,5 - 3h
6,0 - 1 h/CB | 2,5 - 3h
5,5 - 1h/CB | 2,5 - 3h
5,0 - 1 h/CB | 2,0 - 3h

Distance fitting - fitting

8,0 - 1h/CB | 7,5 - 3h
9,0 - 1h/CB | 8,5 - 3h
11,0 - 1h/CB | 10,0 - 3h
13,0 - 1h/CB | 11,5 - 3h
15,0 - 1h/CB | 13,0 - 3h
16,5 - 1h/CB | 14,0 - 3h
18,0 - 1h/CB | 15,0 - 3h
19,0 - 1h/CB | 15,0 - 3h
20,0 - 1h/CB | 15,0 - 3h

