



TM.ONTEC R C1 CB



Catalog number	TM-OR.C1CB0000W
Application	escape route lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	RAL9003
Luminous flux	306 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	4.5 W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	-15-55 °C
Material	PC
IP	IP20
IK	IK03
Warranty	24 months - AT 36 months - ST 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

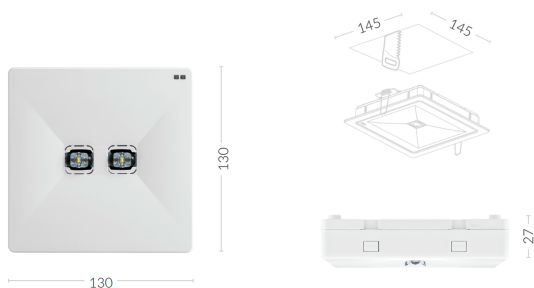

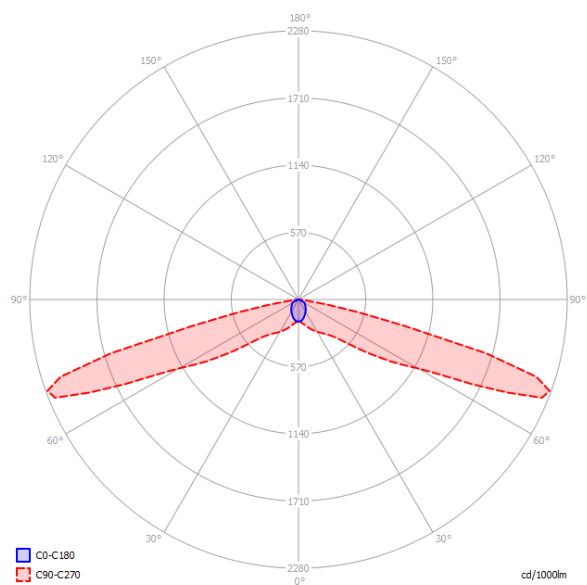

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	8,7	19,4
3,0	9,8	22,2
4,0	11,4	26,7
5,0	12,0	30,5
6,0	4,9	28,7
7,0	3,6	22,4
8,0	3,2	18,6
9,0		
10,0		

