


TM.ONTEC S20 M1X 60/180 M/NM DATA 2



Catalog number	TM-S2.MXDDX060W
Application	anti-panic lighting
Duration time	1 h
Operating mode	M
Version	DD - DATA2
Colour	RAL9003
Luminous flux	371 (1h); 154 (3h) lm
Active power	3.8 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	5-40 °C
Material	PC
IP	IP65/IK08
IK	IK08
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2



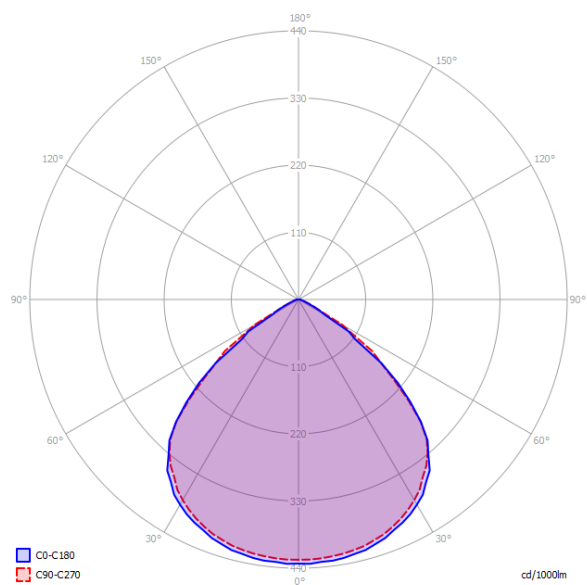

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,5 - 1h 3,0 - 3h	8,0 - 1h 7,0 - 3h
3,0	3,5 - 1h 3,5 - 3h	9,5 - 1h 8,0 - 3h
4,0	4,5 - 1h 4,0 - 3h	11,5 - 1h 9,5 - 3h
5,0	5,0 - 1h 4,0 - 3h	13,0 - 1h 11,0 - 3h
6,0	5,0 - 1h 3,5 - 3h	15,0 - 1h 12,5 - 3h
7,0	5,0 - 1h 3,5 - 3h	16,5 - 1h 13,5 - 3h
8,0	5,5 - 1h 3,5 - 3h	18,0 - 1h 14,0 - 3h
9,0	5,5 - 1h 3,0 - 3h	19,0 - 1h 14,5 - 3h
10,0	5,5 - 1h 2,0 - 3h	20,0 - 1h 15,0 - 3h

