



# TM.ONTEC S30 M1X CB



Catalog number	TM-S3.MXCB0060W
Application	anti-panic lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	RAL9003
Luminous flux	184 (L); 349 (H) lm
Active power	4.4 W
Power supply	210÷250 V AC
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	-25-55 °C
Material	PC
IP	IP65/IK08
IK	IK08
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Sources of LED light	2
Appliance classes	2
60/180	default 1h   M/NM possibility change to 3h   M/NM

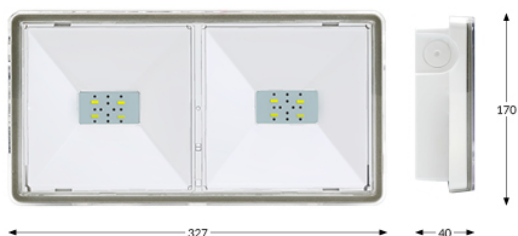

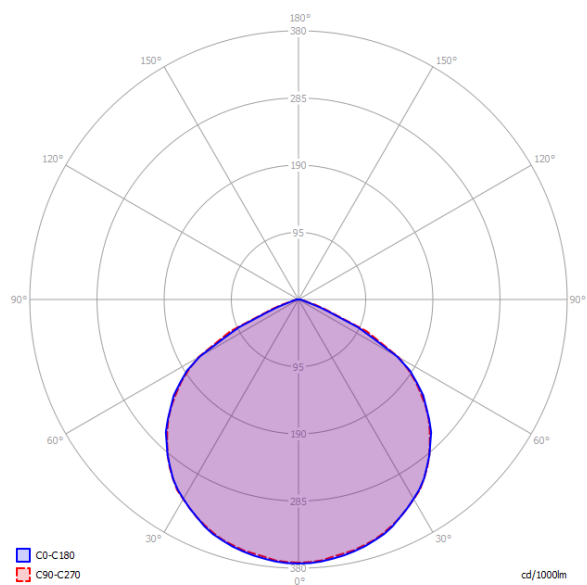

## PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,0 - 1h   3,5 - 3h   4,0 - CB H	10,0 - 1h   8,5 - 3h   9,5 - CB H
3,0	4,5 - 1h   3,5 - 3h   4,0 - CB H	11,0 - 1h   9,5 - 3h   11,0 - CB H
4,0	5,0 - 1h   4,0 - 3h   4,5 - CB H	13,5 - 1h   11,0 - 3h   13,0 - CB H
5,0	5,0 - 1h   4,0 - 3h   4,5 - CB H	15,5 - 1h   12,5 - 3h   15,0 - CB H
6,0	5,5 - 1h   3,5 - 3h   5,0 - CB H	17,0 - 1h   13,5 - 3h   16,0 - CB H
7,0	5,0 - 1h   3,5 - 3h   5,0 - CB H	18,5 - 1h   14,0 - 3h   17,5 - CB H
8,0	5,0 - 1h   3,0 - 3h   5,0 - CB H	19,5 - 1h   15,0 - 3h   18,5 - CB H
9,0	5,0 - 1h   2,5 - 3h   5,0 - CB H	20,5 - 1h   15,5 - 3h   19,0 - CB H
10,0	5,0 - 1h   2,5 - 3h   4,5 - CB H	21,0 - 1h   15,5 - 3h   20,0 - CB H

