



TM.ONTEC S30 M1X 60/180 M/NM DATA 2



Catalog number	TM-S3.MXDDX060W
Application	anti-panic lighting
Duration time	1 h
Operating mode	M
Version	DD - DATA2
Colour	RAL9003
Luminous flux	414 (1h); 184 (3h) lm
Active power	4.35 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	5-40 °C
Material	PC
IP	IP65/IK08
IK	IK08
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Sources of LED light	2
Appliance classes	2
60/180	default 1h M/NM possibility change to 3h M/NM

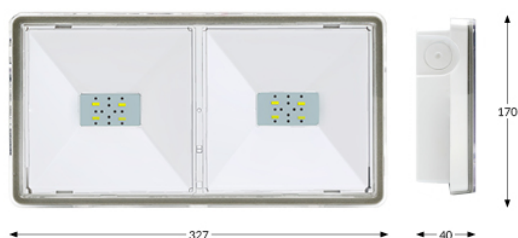

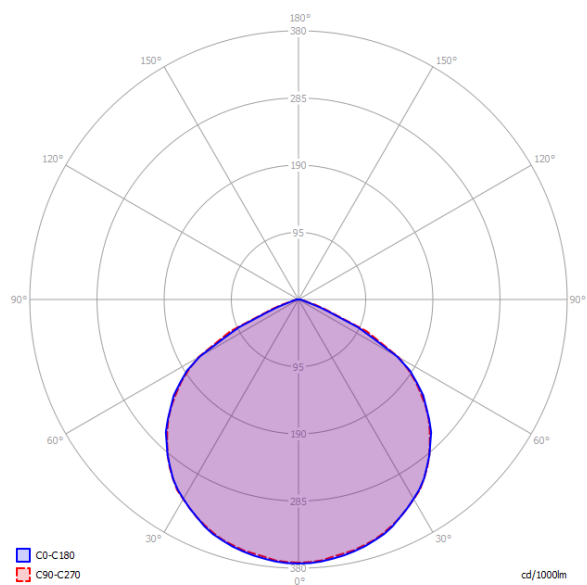

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,0 - 1h 3,5 - 3h 4,0 - CB H	10,0 - 1h 8,5 - 3h 9,5 - CB H
3,0	4,5 - 1h 3,5 - 3h 4,0 - CB H	11,0 - 1h 9,5 - 3h 11,0 - CB H
4,0	5,0 - 1h 4,0 - 3h 4,5 - CB H	13,5 - 1h 11,0 - 3h 13,0 - CB H
5,0	5,0 - 1h 4,0 - 3h 4,5 - CB H	15,5 - 1h 12,5 - 3h 15,0 - CB H
6,0	5,5 - 1h 3,5 - 3h 5,0 - CB H	17,0 - 1h 13,5 - 3h 16,0 - CB H
7,0	5,0 - 1h 3,5 - 3h 5,0 - CB H	18,5 - 1h 14,0 - 3h 17,5 - CB H
8,0	5,0 - 1h 3,0 - 3h 5,0 - CB H	19,5 - 1h 15,0 - 3h 18,5 - CB H
9,0	5,0 - 1h 2,5 - 3h 5,0 - CB H	20,5 - 1h 15,5 - 3h 19,0 - CB H
10,0	5,0 - 1h 2,5 - 3h 4,5 - CB H	21,0 - 1h 15,5 - 3h 20,0 - CB H

