



## EMC TEST REPORT

Test Report No. : KES-EM-21T0440  
Date of Issue : Jun. 07, 2021  
Product name : Network Video Recorder  
Model/Type No. : XRN-420S  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Equipment authorization : **Supplier's Declaration of Conformity**  
Date of Receipt : May. 12, 2021  
Test date : May. 16, 2021 ~ May. 17, 2021  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Ki Man, Kim  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0440

Page (2) of (30)

---

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
Jun. 07, 2021	KES-EM-21T0440	Issued

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (3) of (30)

## TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency .....	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications .....	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments .....	8
1.6	External I/O Cabling .....	9
1.7	EUT Operating Mode(s) .....	10
1.8	Configuration.....	10
1.9	Remarks when standards applied .....	11
1.10	Calibration Details of Equipment Used for Measurement.....	11
1.11	Test Facility .....	11
1.12	Laboratory Accreditations and Listings .....	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports.....	14
2.2	Radiated Electric Field Emissions(Below 1 GHz) .....	15
2.3	Radiated Electric Field Emissions(Above 1 GHz) .....	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz) .....		19
Radiated Electric Field Emissions(Above 1 GHz) .....		21
Test Setup Photos and Configuration .....		22
Conducted Emissions at Mains Power Ports.....		22
Radiated Electric Field Emissions(Below 1 GHz) .....		23
Radiated Electric Field Emissions(Above 1 GHz) .....		24
EUT External Photographs .....		25
EUT Internal Photographs .....		26

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (4) of (30)

## 1.0 General Product Description

### Main Specifications of EUT are:

Display		
Video	Inputs	Max. 4CH
	Resolution	CIF ~ 8MP
	Protocols	sunapi, ONVIF
Live	Local Display	HDMI, VGA
	Multi Screen Display	[Dual Monitor] 1/ 2V/ 2H/ 3V/ 4/ Sequence [Web] 1/ 2V/ 2H/ 3V/ 4
	Resolution	[Local Monitor] 8M(30fps), 1080p(120fps), 720P(120fps), D1(120fps)
Intelligent Analysis		
Search	Object image	AI Search support
Comparison	Event Trigger	N/A
Attribute (AI)	Person	N/A
	Face	N/A
	Vehicle	N/A
Performance		
System	Operating System	Linux
Record	Compression	H.265, H.264, MJPEG, WiseStream(H.265, H.264)
	Recording Bandwidth	50Mbps
	Resolution	CIF ~ 8MP
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Mode	Time, Event, Text, Export, ARB, Bookmark Person, Face Vehicle, LP
	Simultaneous playback	Max 16CH - Set : 4CH - Remote : 4CH Per User
	Resolution	CIF ~ 8MP
	Fisheye Dewarping	N/A
Storage	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
	Built-In	2TB ~ 6TB
	Internal HDD	1ea (Max 8TB)
	External	N/A
Backup	RAID	N/A
	File backup	BU/Exe(GUI), JPG/AVI(Web)
	Function	Multi channel(Upto 4 CH) Play, Date-Time/Title display
Sensor	I/O	4/2 (NO/NC Selectable)
Audio	Input/Output	4CH (network)/output (Set)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (5) of (30)

<b>Network</b>		
Interface		4 Port PoE, RJ-45(1 Gbps)
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Transmission Bandwidth		64Mbps
Max Remote Users		Search (3), Live Unicast (10), Multicast (20)
IP Version		IPv4/v6
Security		IP address filtering, User access Log, 802.1x, Encryption
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnam
OS		Window 10, Mac OS X(10.13)
Web Browser		Google Chrome, Mac Safari, Firefox, Edge
Viewer Software	Type	WAVE(Sunapi 연동), SSM, Webviewer, Smart Viewer, Wisenet Mobile
	CMS Support	Support SDK/CGI(SUNAPI) for integration to 3'rd party VMS
<b>Functions</b>		
Camera Setup	Register	Auto, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Camera MD setup (8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SDDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(4ch) : Multi-Profile Support Playback(4ch)
	Max. Remote Users	Search (3), Live Unicast (10)
Redundancy	Failover	N+1
	ARB	Yes
Easy configuration		P2P(QR code)
System Control		Mouse, Web
<b>Indicator/Interface</b>		
Front	Indicator	LED(Status indicator) : - Power(1), Record(1), Network(1)
Connectors	HDMI	3840x2160 30Hz
	VGA	1920x1080 30Hz
	Audio	Out(1EA) : RCA output
	Ethernet	PoE RJ-45(LAN, 10/100) 4 ea ,RJ-45 1ea (WAN, 1Gbps)
	Alarm	(1) In(4EA, Terminal Block) (2) Out(2EA, Terminal Block) - Relay Out1(NO/NC/COM) - Relay Out2(NO/COM)
	USB	2EA(Front 1 x USB 2.0, Rear 1 x USB 2.0)
	Storage	N/A
	Serial	N/A
	Reset	Switch(1EA, PW clear)
	Power Cord	DC Adaptor
	POE Budget	Max. 50W

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (6) of (30)

System		
Log	Log List	Max. 100,000 (System, Event each log)
Environmental		
Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH
Noise		47 db
Electrical		
Power		100 ~ 240 VAC ±10%; 50/60 Hz
Power Consumption		최대 75W(1HDDs, PoE on)
Mechanical		
Color / Material		Black
Dimension (WxHxD)		W370.0 x H44.0 x D320mm (1U)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (7) of (30)

### 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz    ☐ PoE

### 1.2 Variant Model Differences

Not applicable

### 1.3 Device Modifications

Not applicable

### 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Video Recorder	XRN-420S	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
Adaptor	FSP090-AWAN3	-	Zhonghan Electronics (Shenzhen) Co.,Ltd	-
HDD	ST4000VX000	-	SEAGATE	4 TB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (8) of (30)

## 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Camera1	QND-7080RN/EX	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	-
Camera2	SND-L6013RN	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	-
Camera3	SND-L6013RP	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	-
Camera4	SND-L6013P	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	-
Notebook	ProBook4430s	-	HP	-
Notebook Adaptor	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Alarm1	-	-	-	-
Alarm2	-	-	-	-
Monitor1	SMT-2233	-	Weihai Daewoo Electronics Co., Ltd.	-
Monitor2	SMT-2233	-	Weihai Daewoo Electronics Co., Ltd.	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
USB Memory	-	-	Sandisk	32 GB
Smartphone	LG-SU760	108KPQJ0186212	LG	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr





## 1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Video Recorder (EUT)	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.5	U
	Alarm OUT	Alarm1	Alarm IN	3.0	U
	Alarm IN	Alarm2	Alarm OUT	3.0	U
	Audio OUT	Speaker	Audio IN	1.4	U
	USB	USB Memory	USB	-	-
	RJ-45 (PoE)	Camera1	RJ-45 (PoE)	3.0	U
	RJ-45 (PoE)	Camera2	RJ-45 (PoE)	3.0	U
	RJ-45 (PoE)	Camera3	RJ-45 (PoE)	3.0	U
	RJ-45 (PoE)	Camera4	RJ-45 (PoE)	3.0	U
	HDMI	Monitor1	HDMI	1.6	S
	D-sub	Monitor2	D-sub	1.6	S
	USB	Mouse (EUT)	USB	1.8	U
	External Ground	Ground	External Ground	2.0	U
Notebook	Audio IN	Smartphone	Audio OUT	0.8	U

\* Unshielded=U, Shielded=S


## 1.7 EUT Operating Mode(s)

Test Mode	operating
Operation	the test was conducted while checking the camera video output from the laptop and making sure that they operate normally while performing a ping test.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

## 1.8 Configuration

■ AC Main  
 □ DC Main

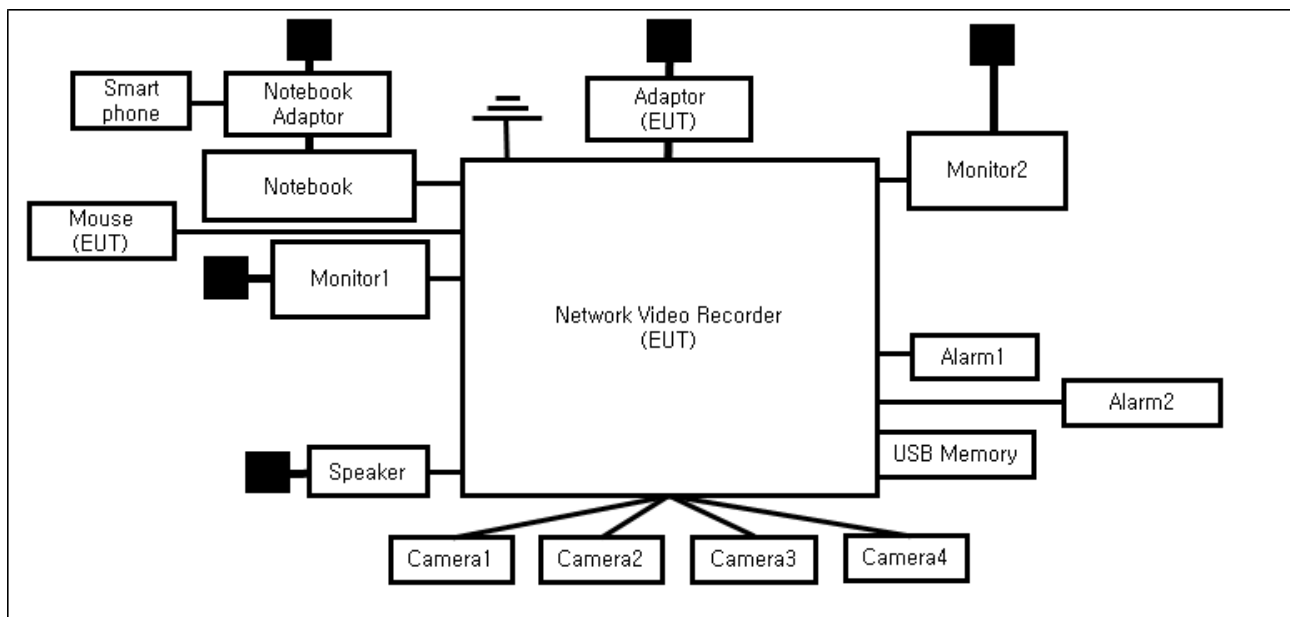

## 1.9 Remarks when standards applied

N/A







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (13) of (30)

- |   |   |                                  |
|---|---|----------------------------------|
| <input type="checkbox"/> <b>VCCI-CISPR 32:2016</b>                        | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>AS/NZS CISPR32:2015</b>                       | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> <b>47 CFR Part 15, Subpart B</b>      |   |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010                           | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> ANSI C63.4-2017                       | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> <b>IC Regulation ICES-003 Issue 7</b> |   |                                  |
| <input checked="" type="checkbox"/> CAN/CSA CISPR 32:17                   | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2017                                  | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>RE- Directive 2014/53/EU</b>                  |   |                                  |
| <input type="checkbox"/> EN 301 489-1 V1.9.2                              |   |                                  |
| <input type="checkbox"/> Equipment for fixed use                          |   |                                  |
| <input type="checkbox"/> Equipment for vehicular use                      |   |                                  |
| <input type="checkbox"/> Equipment for portable use                       |   |                                  |
| <input type="checkbox"/> EN 301 489-3 V1.6.1                              |   |                                  |
| <input type="checkbox"/> EN 301 489-17 V2.2.1                             |   |                                  |
| <input type="checkbox"/> EN 60945:2002                                    |   |                                  |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0440

Page (14) of (30)

## 2.1 Conducted Emissions at Mains Power Ports

**Test Date**

May. 16, 2021

**Test Location**

Electro wave Shieldroom #6

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 29, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

**Test Conditions**

Temperature: (23.6 ± 0,2) °C

Relative Humidity: (43,7 ± 0,2) % R.H.

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0440

Page (15) of (30)

## 2.2 Radiated Electric Field Emissions(Below 1 GHz)

**Test Date**

May. 16, 2021

**Test Location**☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 10, 2022

**Test Conditions**

Temperature: (23,7 ± 0,2) °C

Relative Humidity: (44,0 ± 0,2) % R.H.

**Frequency Range of Measurement**

30 MHz to 1 GHz

**Instrument Settings**

IF Band Width: 120 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0440

Page (16) of (30)

## 2.3 Radiated Electric Field Emissions(Above 1 GHz)

**Test Date**

May. 17, 2021

**Test Location**

SEMI ANECHOIC CHAMBER #4(10m)

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01742	12, 29, 2021
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 10, 2022
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 14, 2021

**Test Conditions**

Temperature: (23,4 ± 0,2) °C

Relative Humidity: (45,1 ± 0,3) % R.H.

**Frequency Range of Measurement**

1 GHz to 5 GHz

**Instrument Settings**

IF Band Width: 1 MHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## APPENDIX A – TEST DATA

### Conducted Emissions at Mains Power Ports

HOT LINE

#### Common Information

Test Description: Conducted Emission  
 Model No.: XRN-420S  
 Phase: L1  
 Mode:  
 Operator Name: KES

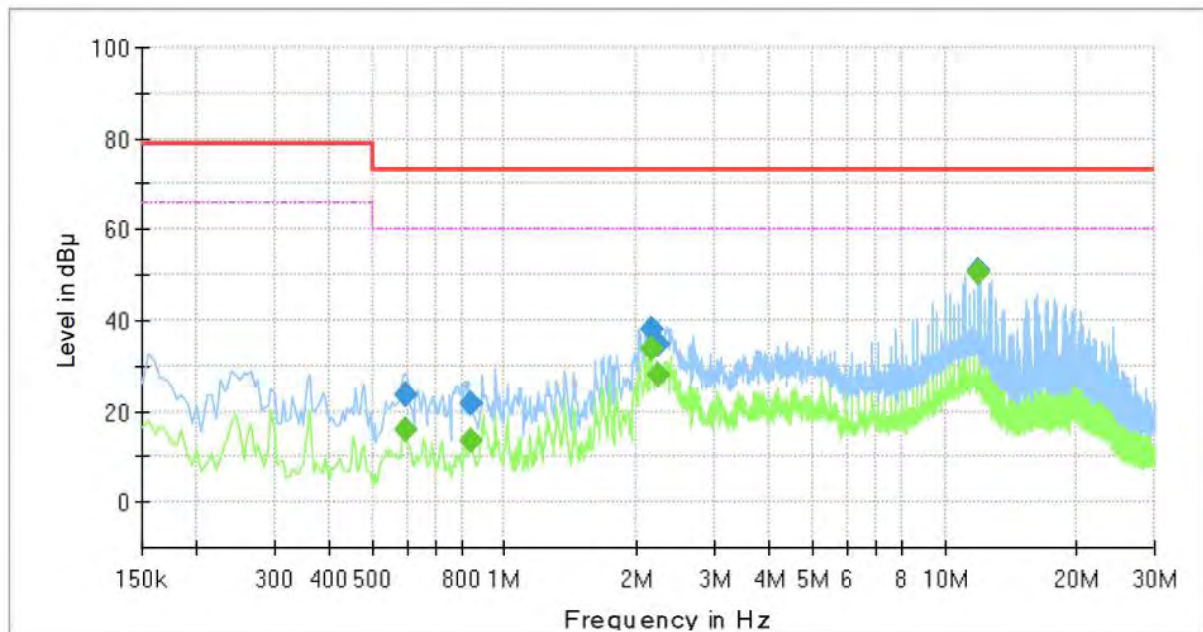


#### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.595000	---	16.04	60.00	43.96	1000.0	9.000	L1	19.8
0.595000	23.77	---	73.00	49.23	1000.0	9.000	L1	19.8
0.835000	---	13.66	60.00	46.34	1000.0	9.000	L1	20.0
0.835000	21.75	---	73.00	51.25	1000.0	9.000	L1	20.0
2.150000	---	33.54	60.00	26.46	1000.0	9.000	L1	20.3
2.150000	38.20	---	73.00	34.80	1000.0	9.000	L1	20.3
2.230000	---	28.02	60.00	31.98	1000.0	9.000	L1	20.3
2.230000	34.90	---	73.00	38.10	1000.0	9.000	L1	20.3
11.870000	---	50.45	60.00	9.55	1000.0	9.000	L1	20.0
11.870000	50.94	---	73.00	22.06	1000.0	9.000	L1	20.0

## NEUTRAL LINE

### Common Information

Test Description:	Conducted Emission
Model No.:	XRN-420S
Phase:	N
Mode:	
Operator Name:	KES

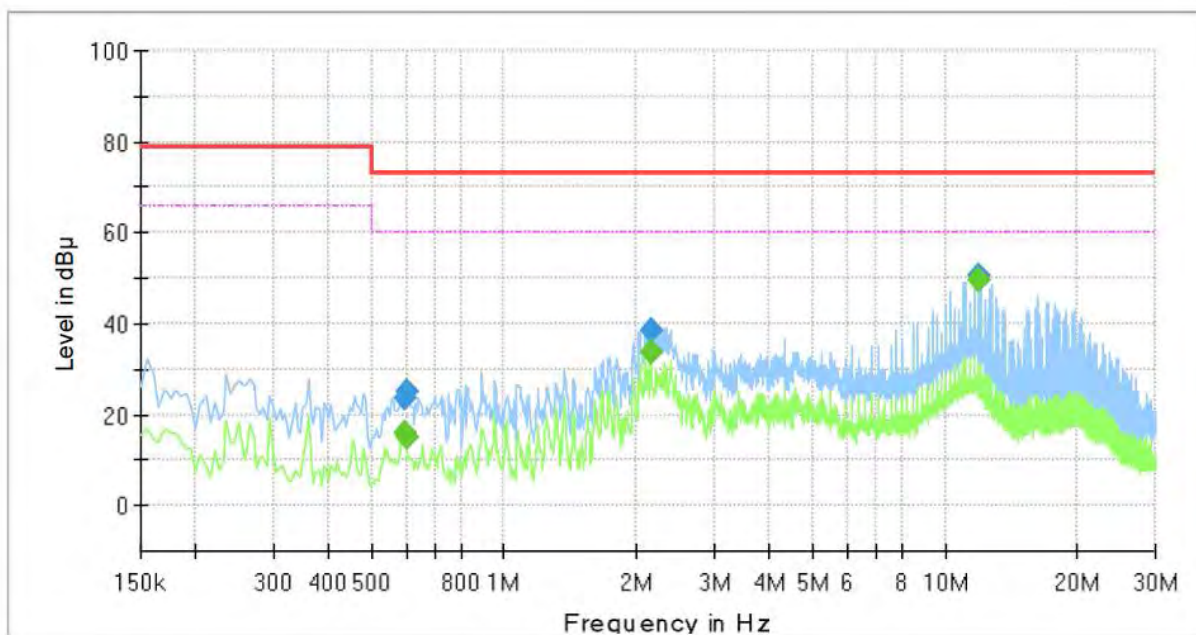

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.595000	---	15.97	60.00	44.03	1000.0	9.000	N	19.8
0.595000	23.59	---	73.00	49.41	1000.0	9.000	N	19.8
0.600000	---	14.79	60.00	45.21	1000.0	9.000	N	19.8
0.600000	24.95	---	73.00	48.05	1000.0	9.000	N	19.8
2.150000	---	33.71	60.00	26.29	1000.0	9.000	N	20.3
2.150000	38.41	---	73.00	34.59	1000.0	9.000	N	20.3
11.870000	---	49.68	60.00	10.32	1000.0	9.000	N	20.0
11.870000	50.34	---	73.00	22.66	1000.0	9.000	N	20.0

#### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))






## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (19) of (30)

### Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

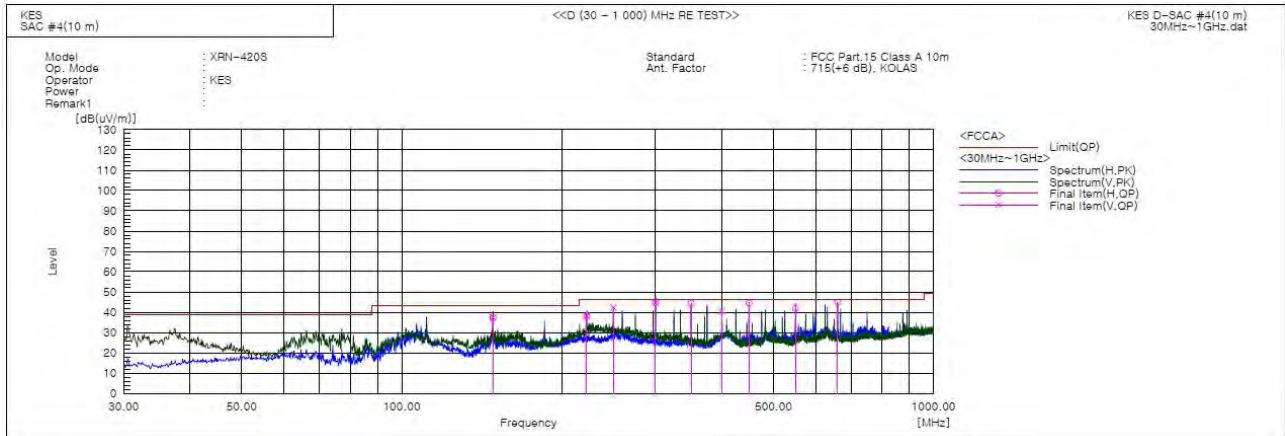

#### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	148.461	V	62.5	-25.1	37.4	43.5	6.1	100.0	16.0	
2	148.461	H	62.4	-25.1	37.3	43.5	6.2	371.0	244.0	
3	222.666	H	58.2	-20.1	38.1	46.5	8.4	400.0	56.0	
4	222.666	V	58.3	-20.1	38.2	46.5	8.3	214.0	220.0	
5	249.948	V	61.5	-19.1	42.4	46.5	4.1	100.0	318.0	
6	300.024	H	63.0	-17.9	45.1	46.5	1.4	341.0	128.0	
7	300.024	V	62.5	-17.9	44.6	46.5	1.9	100.0	228.0	
8	349.979	H	59.8	-15.3	44.5	46.5	2.0	398.0	117.0	
9	400.055	V	55.0	-14.3	40.7	46.5	5.8	142.0	326.0	
10	450.010	H	57.7	-13.1	44.6	46.5	1.9	400.0	8.0	
11	550.041	H	52.2	-10.4	41.8	46.5	4.7	200.0	196.0	
12	660.015	H	52.7	-7.8	44.9	46.5	1.6	114.0	232.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0440  
Page (20) of (30)

### - IC Regulation ICES-003 Issue 7

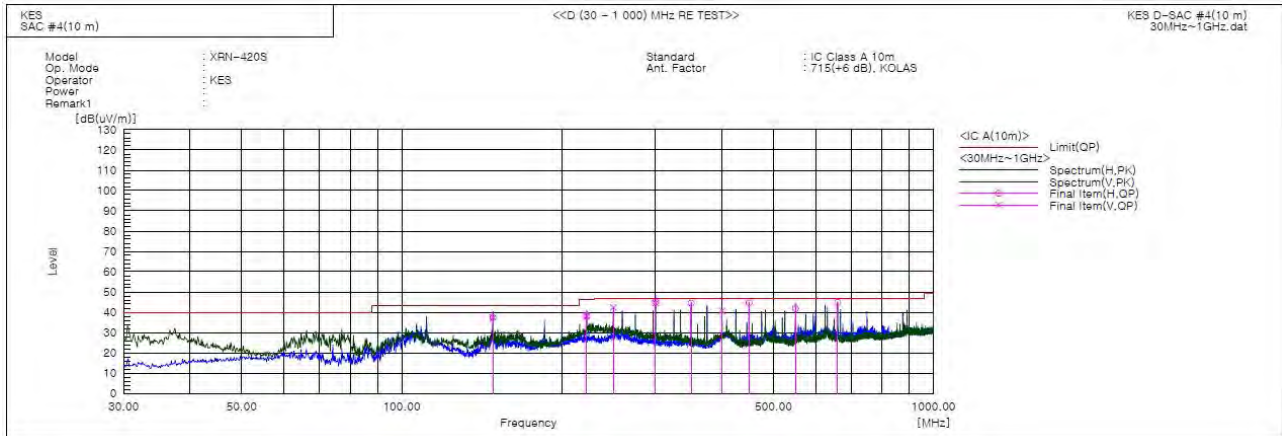

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	148.461	V	62.5	-25.1	37.4	43.5	6.1	100.0	16.0	
2	148.461	H	62.4	-25.1	37.3	43.5	6.2	371.0	244.0	
3	222.666	H	58.2	-20.1	38.1	46.4	8.3	400.0	56.0	
4	222.666	V	58.3	-20.1	38.2	46.4	8.2	214.0	220.0	
5	249.948	V	61.5	-19.1	42.4	47.0	4.6	100.0	318.0	
6	300.024	H	63.0	-17.9	45.1	47.0	1.9	341.0	128.0	
7	300.024	V	62.5	-17.9	44.6	47.0	2.4	100.0	228.0	
8	349.979	H	59.8	-15.3	44.5	47.0	2.5	398.0	117.0	
9	400.055	V	55.0	-14.3	40.7	47.0	6.3	142.0	326.0	
10	450.010	H	57.7	-13.1	44.6	47.0	2.4	400.0	8.0	
11	550.041	H	52.2	-10.4	41.8	47.0	5.2	200.0	196.0	
12	660.015	H	52.7	-7.8	44.9	47.0	2.1	114.0	232.0	

### ◆ Calculation - SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-21T0440

Page (21) of (30)

### Radiated Electric Field Emissions(Above 1 GHz)

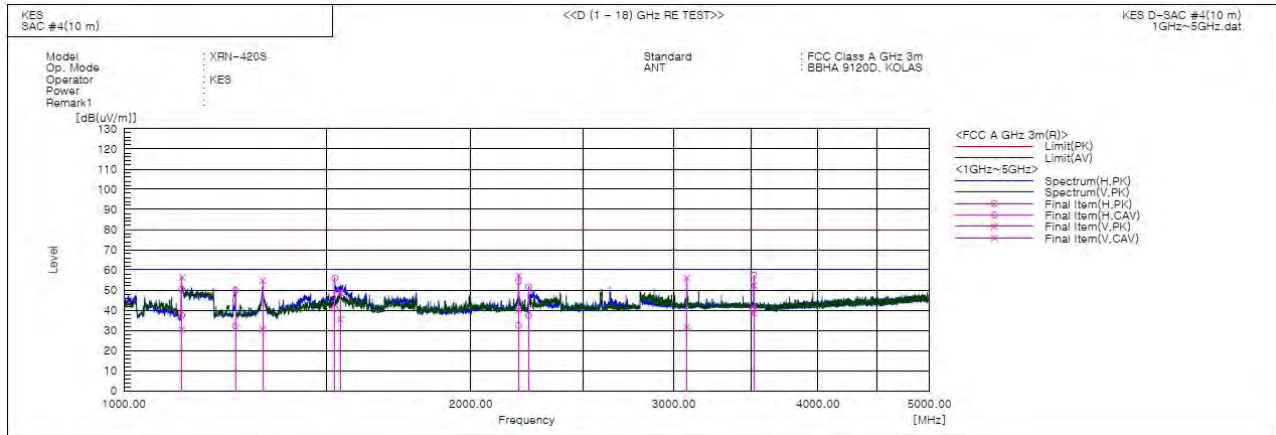

#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1122.500	H	55.3	42.1	-4.7	50.6	37.4	80.0	60.0	29.4	22.6	332.0	236.0	
2	1123.125	V	61.0	35.1	-4.7	56.3	30.4	80.0	60.0	23.7	29.6	251.0	113.0	
3	1250.000	H	53.7	36.0	-3.9	49.8	32.1	80.0	60.0	30.2	27.9	351.0	273.0	
4	1319.500	V	58.2	34.1	-3.5	54.7	30.6	80.0	60.0	25.3	29.4	152.0	338.0	
5	1524.000	H	58.3	43.2	-2.4	55.9	40.8	80.0	60.0	24.1	19.2	100.0	162.0	
6	1540.500	V	51.1	37.7	-2.3	48.8	35.4	80.0	60.0	31.2	24.6	351.0	145.0	
7	2199.500	H	53.5	31.7	0.7	54.2	32.4	80.0	60.0	25.8	27.6	209.0	236.0	
8	2200.000	V	56.4	39.5	0.7	57.1	40.2	80.0	60.0	22.9	19.8	225.0	79.0	
9	2245.000	H	50.6	36.4	1.0	51.6	37.4	80.0	60.0	28.4	22.6	359.0	206.0	
10	3080.000	V	51.2	26.8	4.8	56.0	31.6	80.0	60.0	24.0	28.4	112.0	79.0	
11	3519.500	H	51.5	34.9	5.9	57.4	40.8	80.0	60.0	22.6	19.2	100.0	266.0	
12	3520.000	V	46.3	32.5	5.9	52.2	38.4	80.0	60.0	27.8	21.6	184.0	338.0	

#### ◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Test Setup Photos and Configuration

### Conducted Emissions at Mains Power Ports

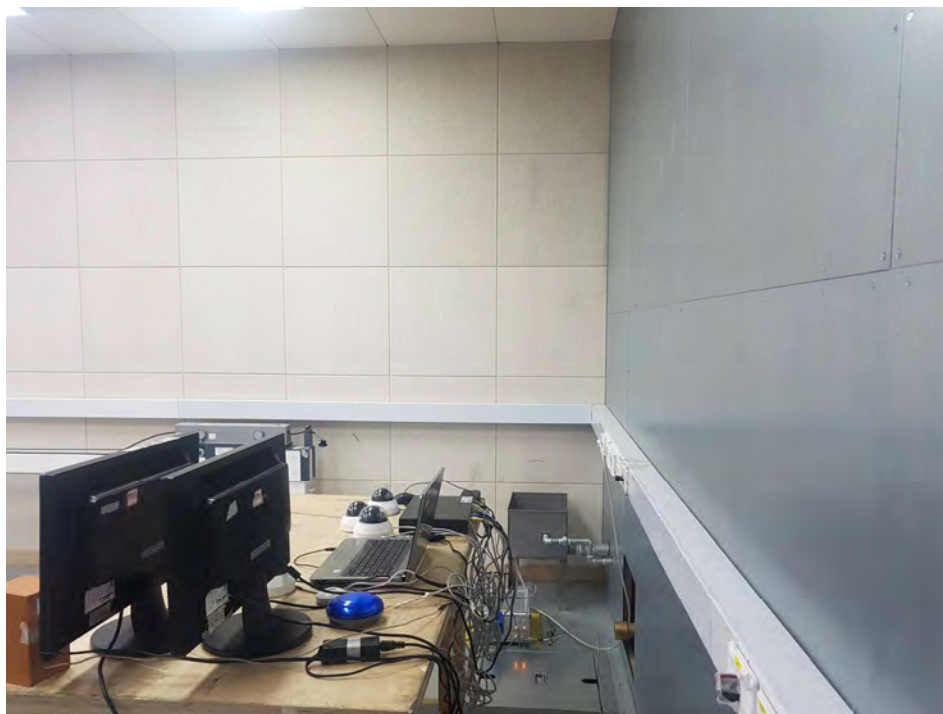


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Radiated Electric Field Emissions(Above 1 GHz)

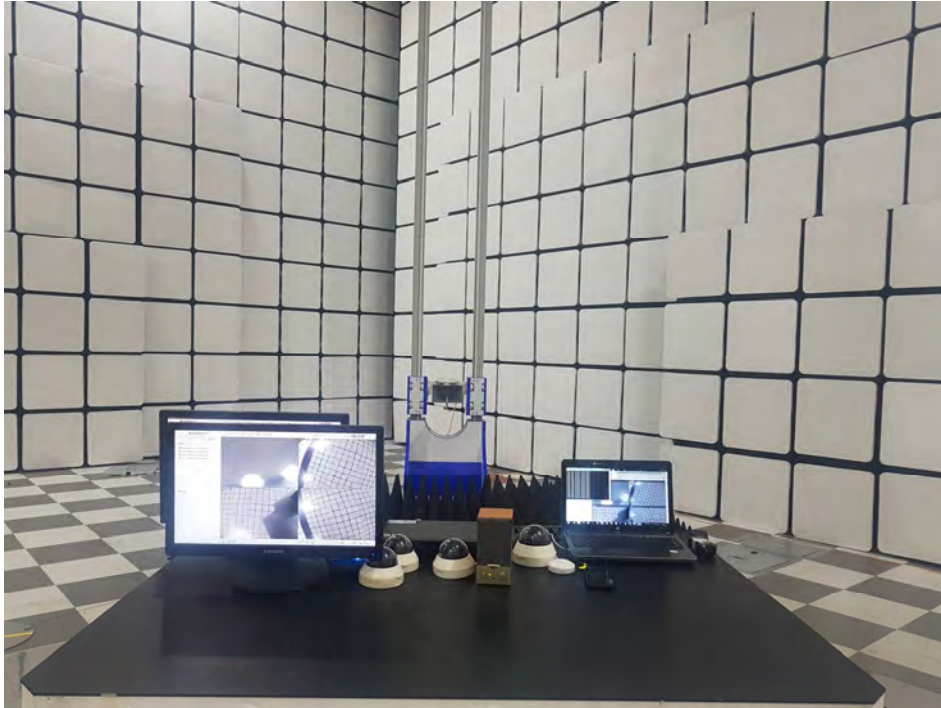

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Board 1

(Top)

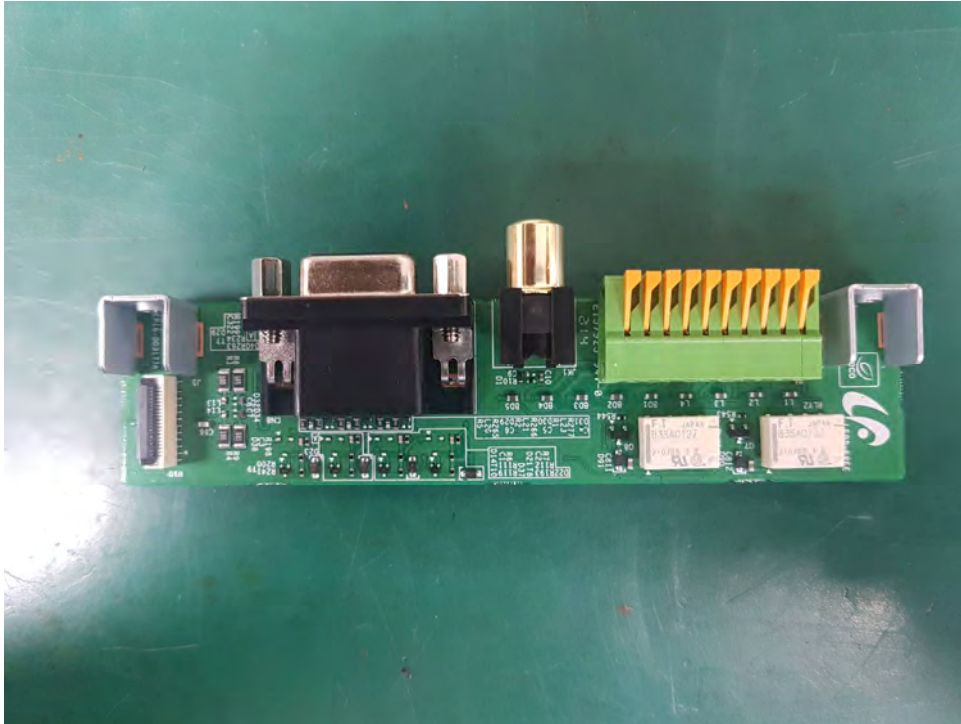

(Bottom)

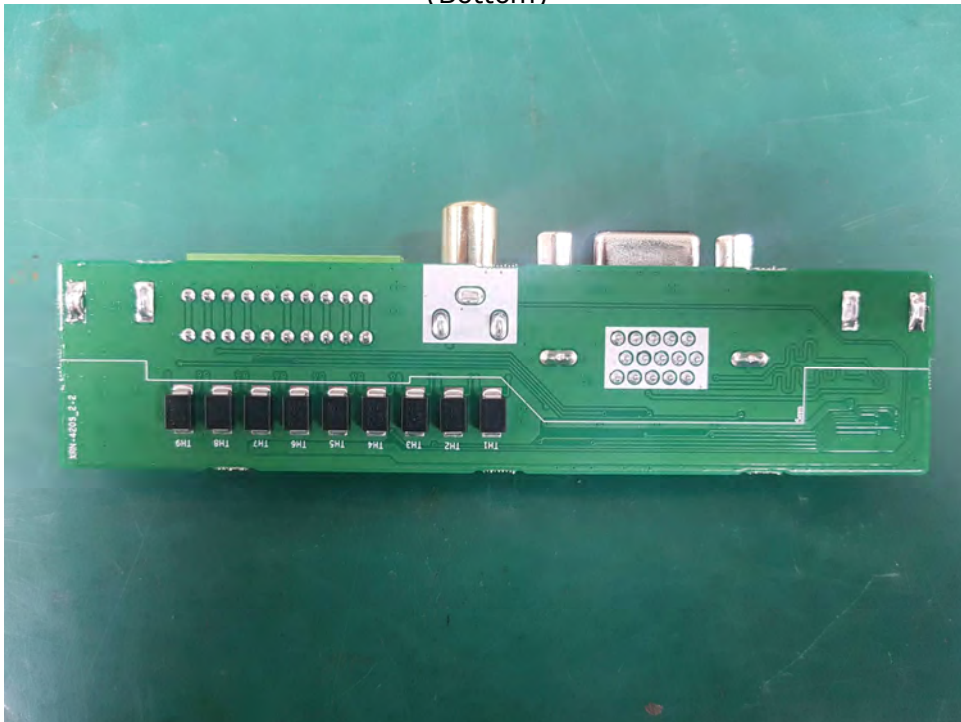

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)




## EUT Internal View – Board 2

(Top)



(Bottom)

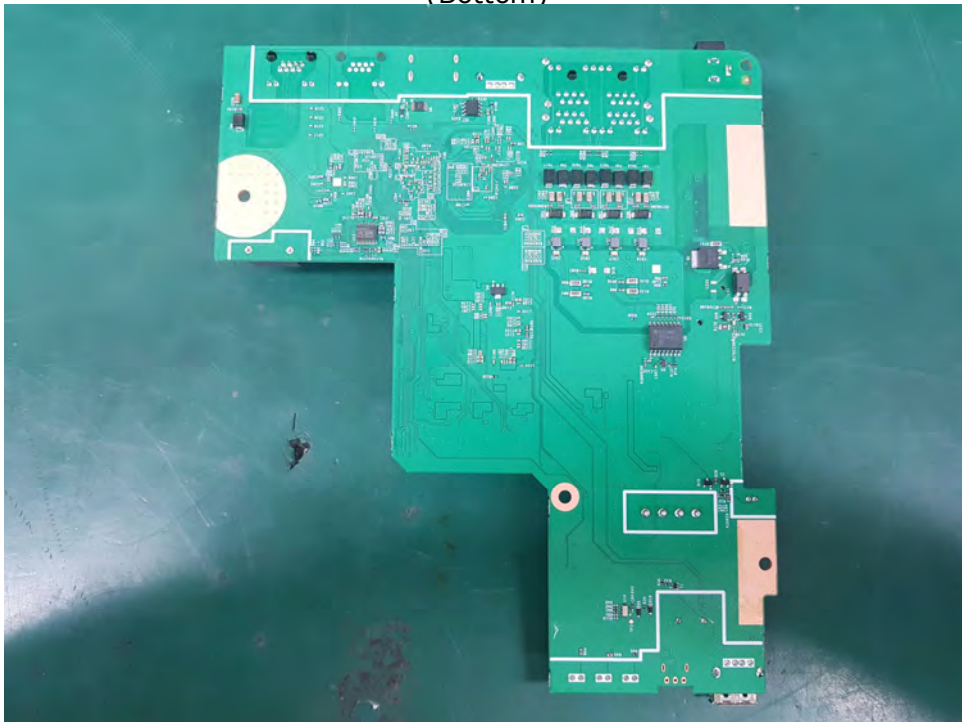

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## EUT Internal View – HDD

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## Label Photographs



CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.