


# AXIS T91B53 Telescopic Ceiling Mount

For affordable and flexible ceiling installations

AXIS T91B53 Telescopic Ceiling Mount is ideal for retail and commercial environments, where a fixed dome or a fixed box camera need to be installed under high ceilings. The telescopic functionality allows the installer to easily and securely adjust the length of extension between 1m/3.2ft to 1.8m/6ft at 10 cm/4" intervals. The base of the telescopic mount is compatible with AXIS T94F01P Conduit Back Box for a safe cabling through 1/2" (M20) conduit pipes. The lightweight and robust ceiling mount can also be installed horizontally on walls when secured with AXIS Safety Wire.

- > **Suitable for indoor use**
- > **Perfect for retail and commercial environment**
- > **Extendable between 1 to 1.8 m (3.2 to 6 ft)**
- > **Compatible with Axis pendant kits and camera holders with 3/4" conduit interface**
- > **Lightweight and robust**

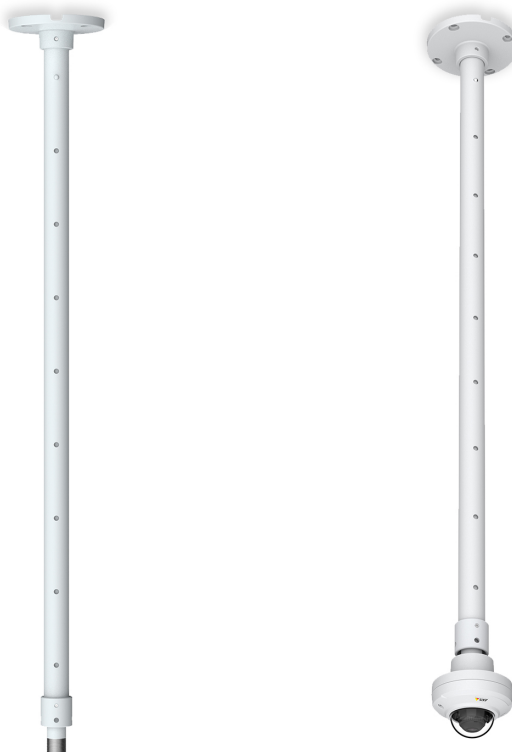

## AXIS T91B53 Telescopic Ceiling Mount

### General

**Supported products**

Requiring AXIS T94B02D Pendant Kit:  
 AXIS M20 Network Camera Series  
 AXIS M30 Network Camera Series  
 AXIS M31 Network Camera Series  
 Requiring AXIS T94K01D Pendant Kit:  
 AXIS P32 Network Camera Series  
 AXIS P33 Network Camera Series (indoor variants only)  
 AXIS Q35 Network Camera Series (indoor variants only)  
 Requiring AXIS T91A04 Camera Holder 3/4" NPS:  
 AXIS M10 Network Camera Series (indoor variants only)  
 AXIS M11 Network Camera Series (indoor variants only)  
 AXIS M50 Network Camera Series  
 AXIS P13 Network Camera Series (indoor variants only)  
 AXIS P14 Network Camera Series  
 AXIS P32 Network Camera Series  
 AXIS P33 Network Camera Series (indoor variants only)  
 AXIS Q35 Network Camera Series (indoor variants only)  
 Requiring AXIS T91A06 Pipe Adapter 3/4-1.5" +  
 AXIS T94A01D Pendant Kit:  
 AXIS M55 Network Camera Series

**Casing** Powder coated aluminum, IK08 impact-resistant

**Sustainability** PVC free

**Environment** Indoor

**Mounting option** Ceiling  
 Wall (requires safety wire)

**Maximum load** 1.6 kg (3.5 lb)

**Cable routing** Side  
 Back

**Approvals**

**Safety**  
 IEC/EN/UL 62368-1  
**Environment**  
 IEC/EN 62262 IK08  
 IEC 60421-2-6  
 IEC 60421-2-27  
 EN 50581

**Dimensions** Ceiling mount: Minimum 1 m (39.3 in), maximum: 1.8 m (70.8 in)  
 Wall mount: 1 m (39.3 in)

**Weight** 1.2 kg (2.6 lb)

**Included accessories** Installation guide  
 Screw and Nut kit

**Optional accessories** AXIS T94B02D Pendant Kit  
 AXIS T94A01D Pendant Kit  
 AXIS T94K01D Pendant Kit  
 AXIS T91A04 Camera Holder 3/4" NPS  
 AXIS T91A06 Pipe Adapter 3/4-1.5"  
 AXIS T94F01P Conduit Back Box  
 AXIS Safety Wire 3 m  
 For more accessories, see [www.axis.com](http://www.axis.com)

**Warranty** Axis 3-year warranty, see [www.axis.com/warranty](http://www.axis.com/warranty)

Environmental responsibility:

[www.axis.com/environmental-responsibility](http://www.axis.com/environmental-responsibility)