

## VIDEO ENTRY SYSTEM


### 4-USER DISTRIBUTOR

#### ref. 1083/55

This device allows to split the column video signal to 4 apartment stations and other distributors



## 4-USER DISTRIBUTOR ref. 1083/55

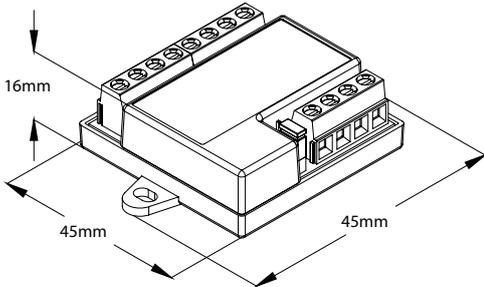

### Ref. 1083/55

- > Floor distributor
- > It allows to split the column video signal to 4 apartment stations and other distributors
- > The device is provided with an input, a passing output and 4 derived outputs
- > Equipped with a PTC protection to prevent damages caused by short circuits on derived lines
- > Dimensions (WxHxD): 45 x 45 x 16 mm - 1,77 x 1,77 x 0,62 in

### TECHNICAL FEATURES

- > Power supply voltage: 36 - 48Vdc
- > Max. current consumption: 9,0mA max
- > Operating temperature range: - 5°C ++ 45°C
- > Compliant with: EN 61000-6-3 and EN 61000-6-1

### INSTALLATION

The device can be installed in junction boxes. Keep it in dry place, protected against bad weather.


In each column can be installed up to 32 distributors, but in case of connection of apartment stations on the passing output, the number of devices connected on the riser must be reduced to 16.

It is not suggested to connect in cascade the distributors.

### TERMINAL PINS DESCRIPTION

- ⊗ ] LINE IN    Bus line input
- ⊗ ] LINE OUT    Bus line output
- ⊗ ] LINE 1    Bus line for apartment station derived number 1
- ⊗ ] LINE 2    Bus line for apartment station derived number 2
- ⊗ ] LINE 3    Bus line for apartment station derived number 3
- ⊗ ] LINE 4    Bus line for apartment station derived number 4

#### 32 distributors max. for each column

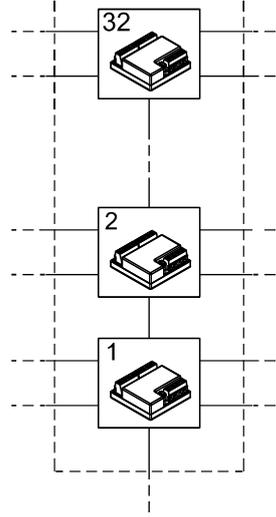

#### 16 devices max.

