



3E0658N-1-E-EUO

**Overview**

The 3E0658N-1-E-EUO vandal resistant button is highly suitable for applications in harsh environments. Panel sealed to IP67 (front side actuation area) and IK 07 shock resistance. Both switch body and switch actuator are machined precisely from quality stainless steel to stringent tolerances.


The switch has a machined return which accommodates the neoprene "o" ring to seal the unit to the panel without visible signs of the washer.

A panel projection of just 1.7mm increases the resistance to attack.

The switch has a momentary contact providing one normally open, one normally closed and one common terminal (terminals are soldered with 16/0.2mm and then a chloroprene sleeve is positioned to increase protection).

Product is supplied flush mount, complete with fixings and a single gang, 37mm galvanised steel electrical backbox.

**Dimensions (mm) :**

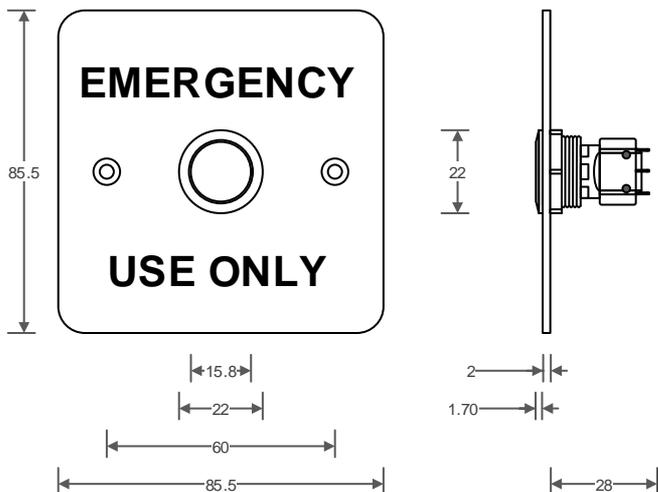

- IP67 Ingress Protection
- N/o, N/C, C
- Momentary Contact
- Silver Contacts
- Engraved as Standard

**IMPORTANT: This product is for use in 12Vdc and 24Vdc applications only and should only be installed by a qualified person**

**Technical (switch)**

Life	100,000 Cycles of Operation
Travel	0.8mm
Operating temperature	-25 °C to +85°C
Impact Rating	IK07
Operating Force	4.5N
Ingress Protection	IP67
Housing	Stainless Steel
Actuator Material	Stainless Steel

**Specification: (panel)**

Plate Material	Grade 304 DP1 Stainless Steel
Legend	EMERGENCY USE ONLY

**Ordering information:**

3E0658N-1-E-EUO

Vandal resistant button, 1 gang, SSS, engraved EMERGENCY USE ONLY, filled red