

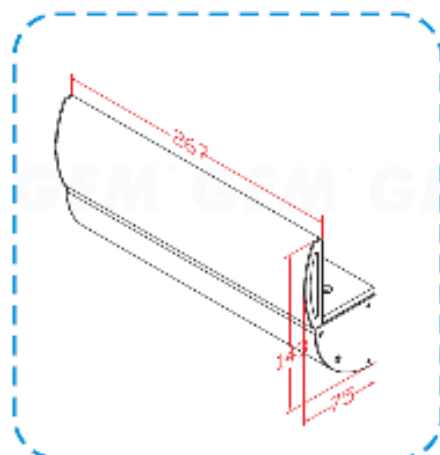
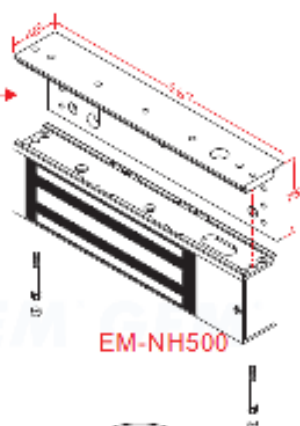


RoHS
Compliant


Application for the Electromagnet: EM-NH500 Series

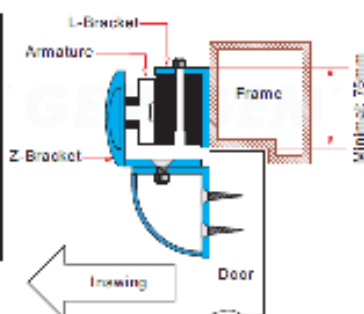

LZ-NH500NAU

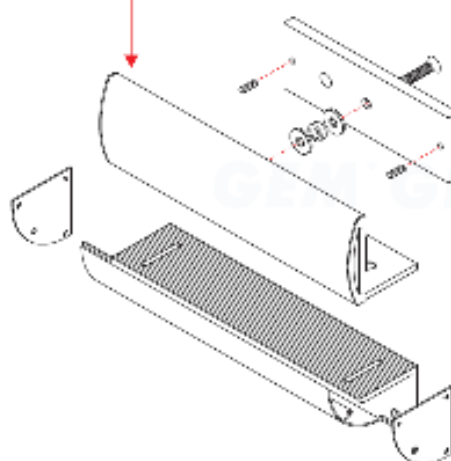


EM-NH500




Unit:mm


With LZ bracket for inswing doors




1 Find a mounting location on the door frame for the L bracket. Make sure that the door is still closeable.




2 Use the fixing bolt to tighten the electromagnet lock on the L bracket.




3 Assemble the Z bracket, and make sure that the Z bracket is adjustable.




4 Insert the guide pins into the armature plate.




5 Assemble the armature plate and the Z bracket. (Must add rubber washer)



6 Close the door and connect the power.



7 Test the tightness and adjust the Z bracket to fit the door.



Finish

Lock tighten the Z bracket