

# 1500i C™

## NEW FOG CANNON™ WITH MORE FOG, LOWER POWER CONSUMPTION, IP AND EASIER ASSEMBLY

**New technology, smart features and sleek design make 1500i C™ the new preferred Fog Cannon™ for both users and installers.**


Never before have you seen a PROTECT Fog Cannon® make so much fog with so modest a power consumption. Up to 20% more fog and 50% lower power consumption compared to previous models. It is positive to purse and the climate! It is the new heater technology which gives you a good and green argument for choosing the new PROTECT Fog Cannon®.

The nozzle for the Fog Cannon™ comes in a brand new and improved version that can turn up to 30° in all directions. Fine-tune yourself what direction and angle the fog should fire. Undoing the position is no problem. Say goodbye to the inflexible nozzle paste, as the new nozzle is preinstalled and just needs to be adjusted as needed.

Fast and trouble-free assembly and service is a trademark of PROTECT™, and with 1500i C™ we have made it even smarter. You simply mount a light but stable metal plate on the wall or ceiling, after which you simply hook the Fog Cannon™ on the plate by yourself. Quick, easy and safe, but it doesn't stop there. A corner mount is often preferable for practical for aesthetic reasons - it is possible with 1500i C™. Two simple corner brackets will help you on the road for mounting horizontally between the ceiling and the wall or vertically on the wall in a corner.

### BENEFITS OF 1500i C™

- Up to 20% more fog and 50% lower power consumption
- Built-in network connection (IP) - integrated IPCard™
- Easy and quick blocking of the fog before service (service switch)
- New multi-angled adjustable nozzle
- New mounting system for quick, safe and easy mounting
- Now possible to mount in corners
- More fluid level information - Fog Cannon™ display, IntelliCloud™ and IntelliSuite™
- Extended standby time in the event of a power failure
  - Greater user safety
- New and slimmer design
- Compatible with IntelliCloud™, IntelliSuite™, IntelliBox™, UniBusCard™ and MultiCard™

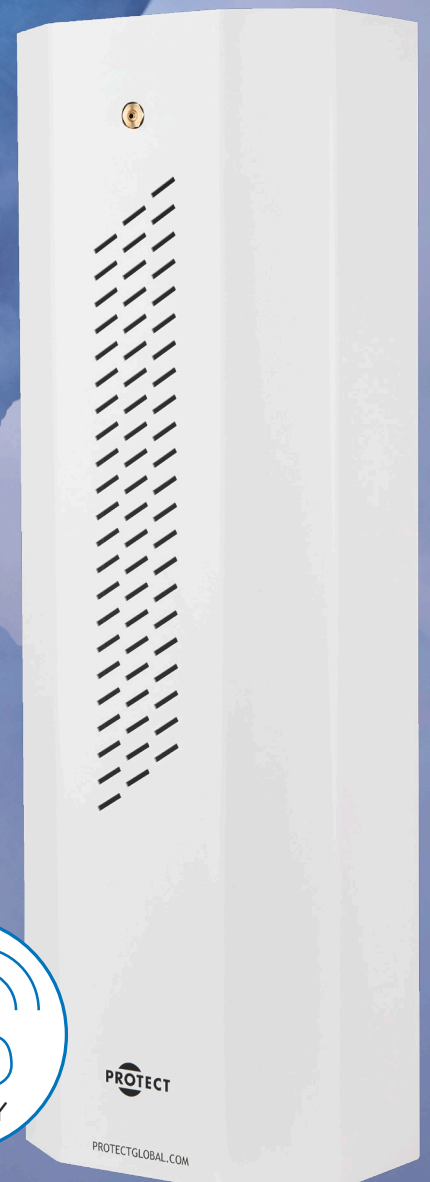

SECURED IN SECONDS

PROTECT

PROTECTGLOBAL.COM

## General features and specifications | PROTECT 1500i C™

|  |
|--|
| Can shoot multiple times. Pulse function up to 10 min. - efficient fog maintenance according to a selectable pattern (see below) |
| Flexible adjustment of fog volume to optimally cover the specific room   |
| 100 % silent in standby mode - no noisy fan  |
| Uses the same type of fluid container (as also 600i™ / 1100i™) - 1,1 l. included   |
| Compatible with any alarm system   |
| Compatible with IntelliCloud™, IntelliSuite™, IntelliBox™, UniBusCard™ and MultiCard™  |
| Datalog possible with IntelliSuite™  |
| Electronic fluid measurement   |
| Built-in automatic battery testing   |
| Input: 5 signals (+2)<br>Output: 3 signals (+2)  |
| On/off dipswitches for setting of fog time, signals and heating  |
| Backup of electronics and pump (2 x 12V, 1,2 Ah)   |
| Power backup after power loss: Up to 3 hours   |
| Optical, auditory and electrical signals / indicators  |
| Status indicator on PCB  |
| External status indicator (LED)  |
| Operating temperature (min./maks.): 5/80 °C  |
| Anti-sabotage, impact-resistant steel casing   |
| Colours available: White and black   |
| 5-year manufacturer's warranty, cf. PROTECT A/S terms of sale and delivery   |

## Technical specifications | PROTECT 1500i C™

|   |  |
|---|--|
| Times and fog performance                   | 20 sec.: 425 m <sup>3</sup><br>40 sec.: 850 m <sup>3</sup><br>60 sec.: 1350 m <sup>3</sup><br>80 sec.: 1600 m <sup>3</sup><br>80 sec. + 4 min. pulse: 1950 m <sup>3</sup><br>80 sec. + 9 min. pulse: 2740 m <sup>3</sup> |
| Four levels for setting the fog             | 425-1600 m <sup>3</sup>  |
| Number of activations per 60 sec. / 80 sec. | 3  |
| Power consumption                           | 1350 W   |
| Mains connection                            | 230V, 50 Hz  |
| Standby consumption after heating up        | 56 W   |
| Standby consumption when heat is disabled   | 5-10 W   |
| Heating time from cold                      | 15-25 min.   |
| Re-heating time after fog discharge         | 0-8 min.   |
| Dimensions                                  | L: 650 x H: 170 x W: 190 mm  |
| Installation weight                         | 18,5 kg  |



SECURED IN SECONDS