

ROUND METAL CEILING

Loudspeaker, miniature



➤ **RCS3/T**

TECHNICAL SPECIFICATIONS

Rated power, Watts	6
Tappings 100 volt line, Watts	6 / 4 / 2
Transformer Impedance, Ohms, 100V	1.67k/2.5k/5k
Tappings 70.7 volt line, Watts	3 / 2 / 1
Driver impedance, Ohms	8
Effective frequency range, Hz (BSEN60268-5)	100-20,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz	87
S.P.L. @ Full power Octave Bandwidth, dB	94
Acoustic Power (dB-PWL@1 watt) 1k/2k Hz	83/85
Dispersion at 1k/2k Hz, Degrees	180/180
Directivity Axial Q factor, 1k/2k Hz	2.0/2.4
Dimensions, diameter, mm	Ø 104.5
Net weight, Kgs	0.49
Colour/Finish	White RAL9016
Material	Steel
Mounting	Twin Spring
Cut-out, mm	Ø 85


EASE, CATT, ULYSSES and Architectural specifications are supplied on the disc inserted at the back of this folder
 Manufacturer reserves the right to alter specifications without notice – March 2007

50 ➤ **RCS3/T**

ROUND METAL CEILING LOUDSPEAKER MINIATURE



▼ side view

unit: **mm**

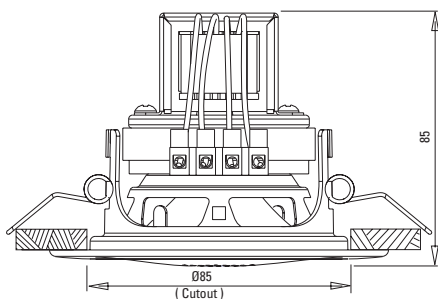


▼ front view


unit: **mm**



▼ circuit diagram



speech octave band sensitivity

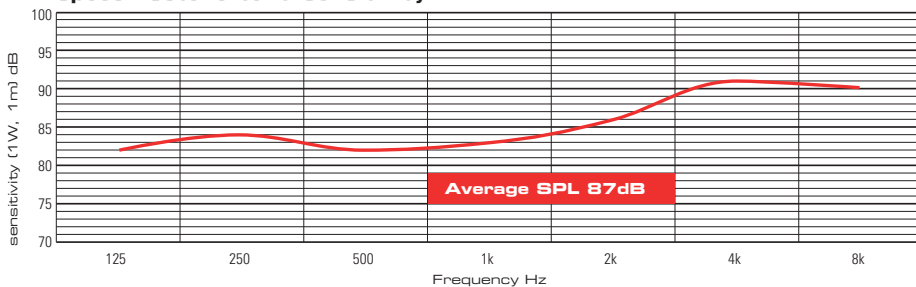

Effective Frequency Range ➤ **RCS3/T** 100Hz - 20KHz



Penton UK Ltd

Unit 2 Teville Industrials | Dominion Way | Worthing | West Sussex | BN14 8NW

T: +44 (0)1903 215315 | F: +44(0)1903 215415 | E: SALES@PENTONUK.CO.UK

www.pentonuk.co.uk