


S1705S Call button with re-assurance LED ●●●●●

Flush fitting stainless steel engraved call point with a vandal resistant button and re-assurance LED. This is a non-latching unit with single pole change over contacts.

Separate terminals are provided for the LED (red).

The LED current limit resistor is provided for 12 vdc operation.

- Brushed Stainless Steel
- Supplied with 38mm deep galvanised mounting box for flush fitting
- IP Rated
- Customised versions available on request
- Surface mount using S0610

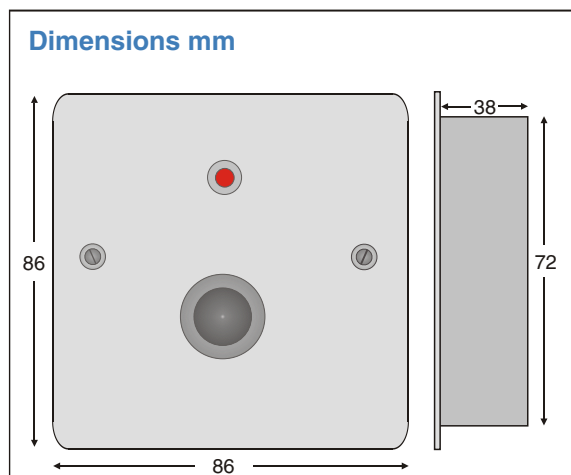

| Specification | S1705S |
|------------------------|---|
| Led Current | 20mA @ 12vdc |
| Switch Contacts | Single pole normally open 2A@ 30vdc |
| Visual Indication | 1 x Red LED |
| Integral Sounder Level | N/A |
| Tamper | N/A |
| Material | 304 Grade Stainless Steel |
| Dimensions | 86mm x 86mm x 2mm (Facia) 38mm galvanised back box supplied |
| Weight | 0.25kg |
| IP Rating | IP65 - To maintain the IP rating a suitable sealant or gasket for the rear of the plate is required |
| Approvals | CE and RoHs compliant |

| Available as: | |
|---------------|--|
| S1705S-ATS | Call button with LED with anti tamper screws |
| S1705S-B | Call button with re-assurance LED and buzzer |



Related Products



Hoyles Electronic Developments Ltd

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

