

Relays S342 and S342/24



General purpose double pole relay module, supplied in various options, including individual, multiple, boxed or bulk packed, ideal for van stock.

- Two holes provided for permanent fixing
- 12vdc or 24vdc versions available from stock
- Diode protection for polarity and coil back emf
- Screw terminals for easy connection
- Manufactured in the UK

Options Available

Individual

S342-1 - 12vdc powered } **PCB only**
S342-1/24 - 24vdc powered }

Dual

S342-2 - 12vdc powered } **PCB only**
S342-2/24 - 24vdc powered }
S342-2B - 12vdc powered } **Boxed**
S342-2B/24 - 24vdc powered }

Triple

S342-3 - 12vdc powered } **PCB only**
S342-3/24 - 24vdc powered }
S342-3B - 12vdc powered } **Boxed**
S342-3B/24 - 24vdc powered }


Quad

S342-4 - 12vdc powered } **PCB only**
S342-4/24 - 24vdc powered }
S342-4B - 12vdc powered } **Boxed**
S342-4B/24 - 24vdc powered }


20 pack

S342-20 - 12vdc powered } **PCB only**
S342-20/24 - 24vdc powered }

Specification	S342-1 & S342-1/24 (individual)
Led Current	N/A
Switch Contacts	DPCO contacts rated at 2A
Visual Indication	N/A
Integral Sounder Level	N/A
Supply Voltage	12vac or 24vac depending on version
Supply input current	20mA max in alarm
Tamper	N/A
Material	PCB module
Dimensions	L40mm x W34mm x D14mm
Weight	0.038kg
IP Rating	N/A
Approvals	CE and RoHs compliant

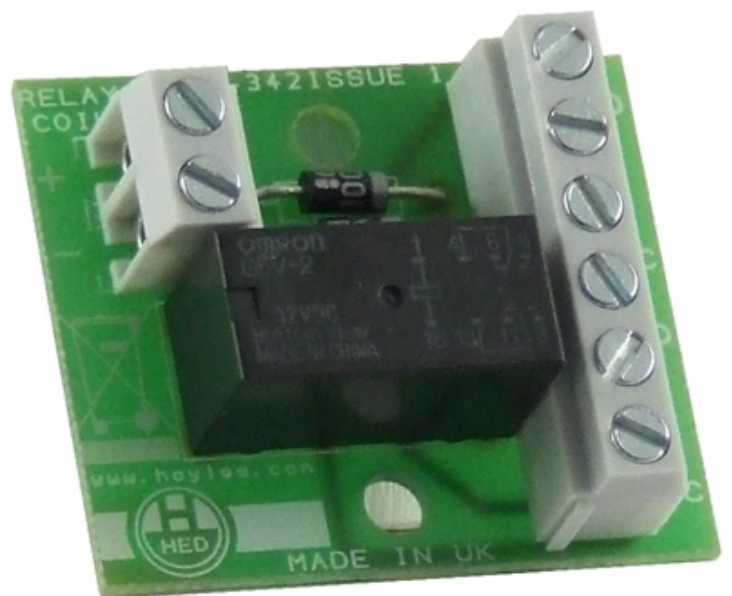

Related Products

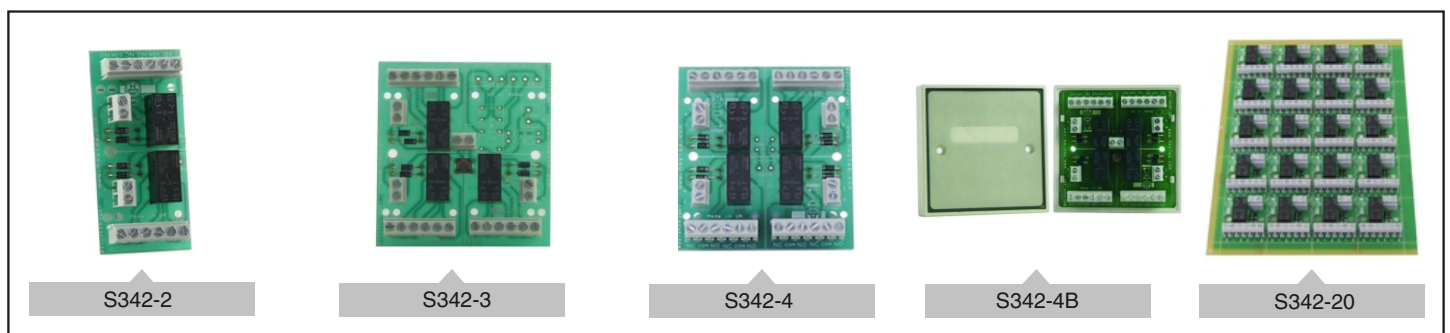

Hoyles Electronic Developments Ltd

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

