


ITECH C1 CB



Catalog number	TM-IT.C1CB0060W
Application	escape route lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	RAL9003
Luminous flux	369 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	4.59 W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	-25-55 °C
Material	PC
IP	IP65
IK	IK06
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



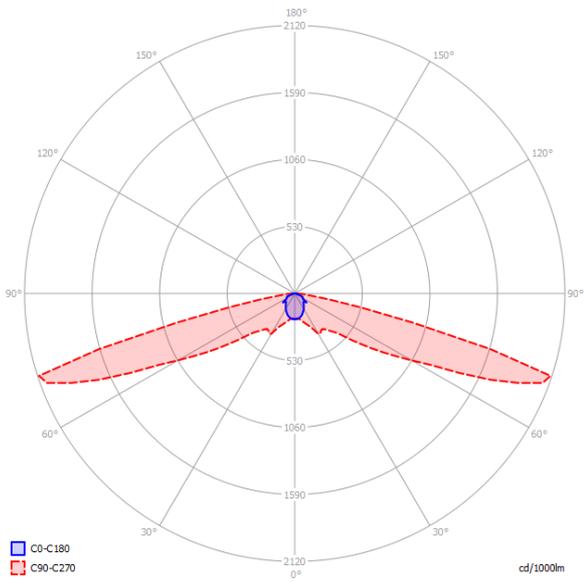

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	8,6	19,2
3,0	9,6	22,0
4,0	11,0	26,5
5,0	9,2	29,5
6,0	4,5	27,5
7,0	3,5	22,0
8,0		
9,0		
10,0		

