


# TM.ONTEC E E1P 301 M AT



Maximum light power (the luminaire can power the light source with a different power)

Catalog number	TM-OE.EPATM300W
Duration time	3 h
Operating mode	M
Version	AT - auto-test / self-test
Colour	RAL9003
Visibility	25 m
Luminance	>300 cd/m²
Maximum light power (the luminaire can power the light source with a different power)	1.0 W
Active power	5.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
IP	IP20
IK	IK05
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	ST: 24 months AT: 36 months DATA/CB: 60 months
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

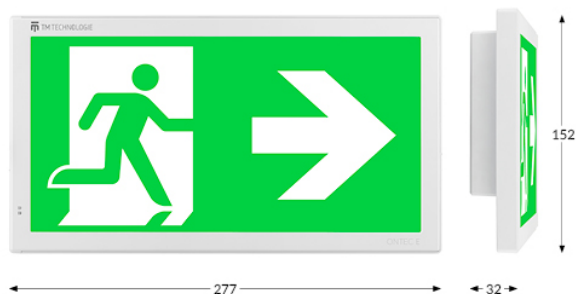