


TM.ONTEC G E1E 301 M ST



Catalog number	TM-OG.EESTM300W
Duration time	3 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Visibility	25 m
Luminance	>150 cd/m²
Maximum light power (the luminaire can power the light source with a different power)	1.5 W
Active power	4.8 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
IP	IP20
IK	IK05
Battery	LiFePO4/C 6.4V 0.57Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

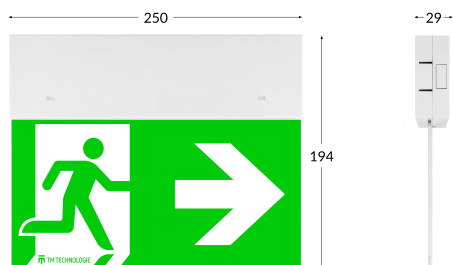