

WBX HD Ground loop Isolator

Product Code - WBXGLIHD

- Compatible with all HD-TVI, HD-CVI, AHD & CVBS analog cameras
- BNC male to BNC female with mini 20cm RG 59 coaxial pigtail lead on both sides.
- Passive, No power supply required
- Prevents video-signal distortion caused by video ground loops
- Eliminates picture tearing, cross talk and rolling
- Prevents power cables laid by others interfering with the CCTV system
- Built in 800v Video Isolator, eliminate interference effectively working with DVR
- Insert Loss: ≤ 0.5 dB
- Dimensions: 41.5x22.5x16.5mm (L*W*H BNC connector included)



WBXGLIHD is a high performance and highly reliable HD coaxial video ground loop isolator that is used for solving the signal interference problems caused by potential sources of interference. It features two BNCs, male and female, with superior lightning protection.

The ground loop isolator can only be used on the DVR side, and if used on the HD camera side then there will be no video.


Once the signal has passed the isolator, it will become a clear video picture, without any ghost. It is widely used in various security monitoring system. No power, easy and convenient installation, and high performance.

The video ground loop isolator should be installed where video cable runs are known to have ground loops. It must be installed on the video cable at the DVR end that has come directly from the camera, but before the cable has been connected to the DVR.

If several video cameras come from the same area, fix a video ground loop isolator in every cable, or a grounded loop will remain.

WBXGLIHD

- Make sure the device installation follows the manufacturer's instructions
- Check whether each terminal of the BNC is in good connection
- Check whether the quality of the transmission cable is reliable

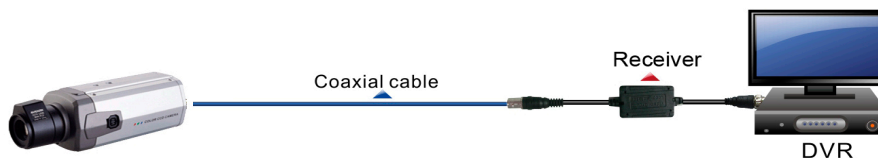

TECHNICAL SPECIFICATIONS

Model		WBXGLIHD
Product Name		HD TVI, CVI, AHD & CVBS CoaxialVideo Ground Loop Isolator
Applied devices		CCTV/CATV system, Antenna of Television, FM receivers, video camera, monitors, multiplexers & Quad processor, VCR. VOD....etc.
Power	Insertion Loss	≤0.5dB
	Frequency Response	0Hz~65MHz
	Input Impedance	75Ω
	Output Impedance	75Ω
	Isolated Voltage	800V DC (MIN)
	Insulation Resistance	≥100MΩ
Protection	ESD Protection	Contact discharge 6000v Air discharge 8000V IEC61000-4-2
	Surge Protection	4kV 10/700us, IEC61000 - 4 - 5
Stability	MTBF	>20000H
Mechanical	Dimensions (L*W*H)	41.5 * 22.5* 16.5mm (BNC connector included)
	Housing	ABS plastic
	Body Color	Black
	Net Weight	38g
Environment	Operating Temperature	-20° ~ 55° C
	Storage Temperature	-40° ~ 70° C
	Relative Humidity	0-95% (non-condensing)