BELDEN EQUIVALENTS

Securi-Flex®

Belden equivalents

TITLE:
Access Purple Pipe

CODE:
SFX/ACCESS-1-LSZH-D-PUR-100

DESCRIPTION:
100m Access 1 pr1 20AWG OSC, pr2&3 22AWG ISP, 9cores 22AWG OSC Purple LSZH

SUPPLIED AS:
Reel of 100m

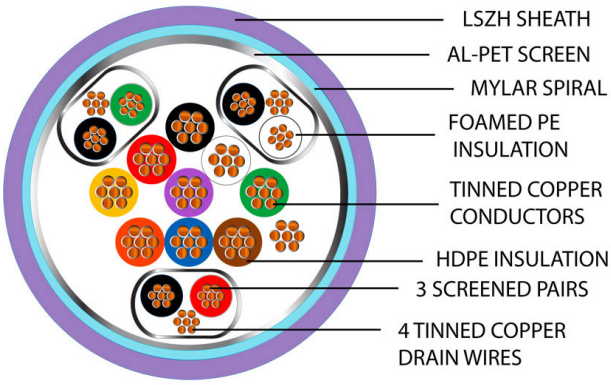



TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

Product Specification

Cable Construction

Cable Construction	Screened pair x 2
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.24 ±0.008 x 7
Overall Diameter (mm)	9.10 ±0.30

Insulation

Insulation	Foamed PE
Insulation Colour	Black,RedBlack,White
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.32

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Purple
Overall Diameter (mm)	9.10 ±0.30
Jacket Colour	Purple RAL 4005
Jacket Thickness (mm)	1.00 ±0.80

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<60O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	30V

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.