FR
EN

Surface mounting

Fit the bottom onto the belt (option ref. 590.9220) using 4 screws CZ M3 x 6.
Attach the assembly (base + belt) on support by three screws of diameter 3 to 3.5 max.
Connect the entry station.
Attach the front panel with the 6 FX teat screws (TORX) M3 x 10.
To ensure that your intercom is watertight, it is necessary that the front panel, once mounted, rests on the entire seal between the bottom and the front panel.

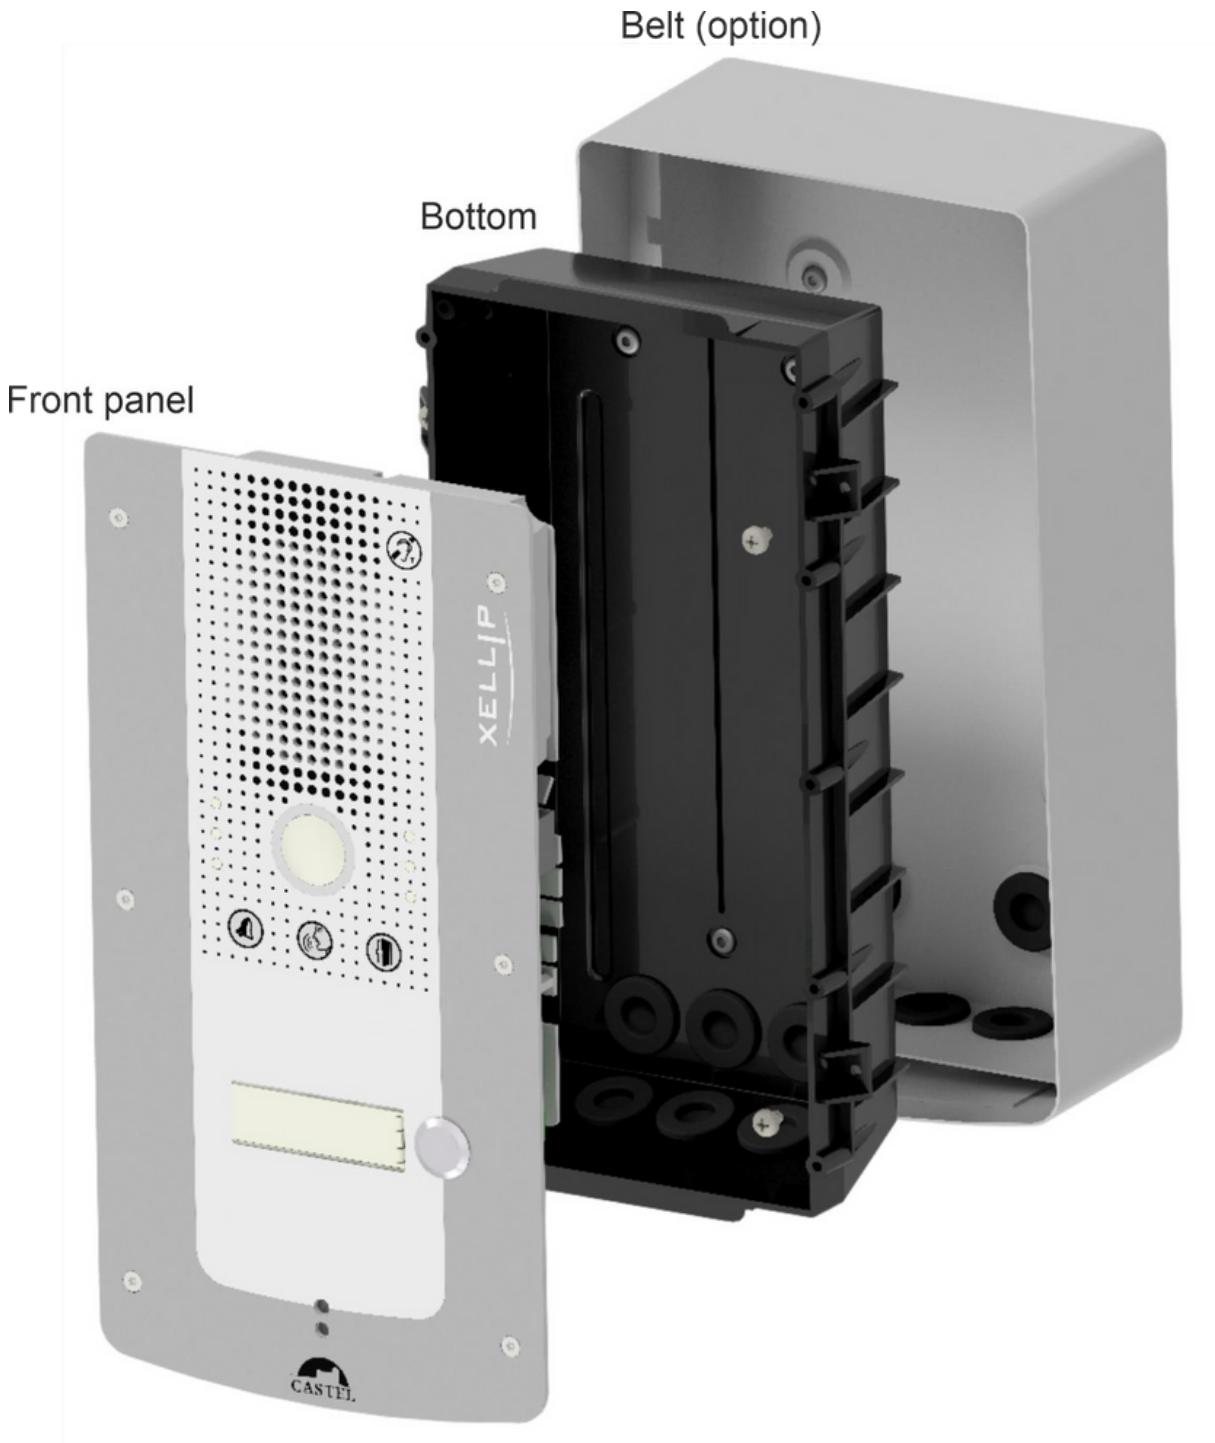

FR
EN

Mounting the cap option

Stainless steel 316L cap. Dimensions: H 276mm x W 149mm x D 26mm
Flush bottom.
Attach the cap (option ref. 590.9800) on the bottom using 4 screws FX (TORX) M3 x 10.
Connect the entry station.
Attach the front panel with the 6 FX teat screws (TORX) M3 x 10.
To ensure that your intercom is watertight, it is necessary that the front panel, once mounted, rests on the entire seal between the bottom and the front panel.

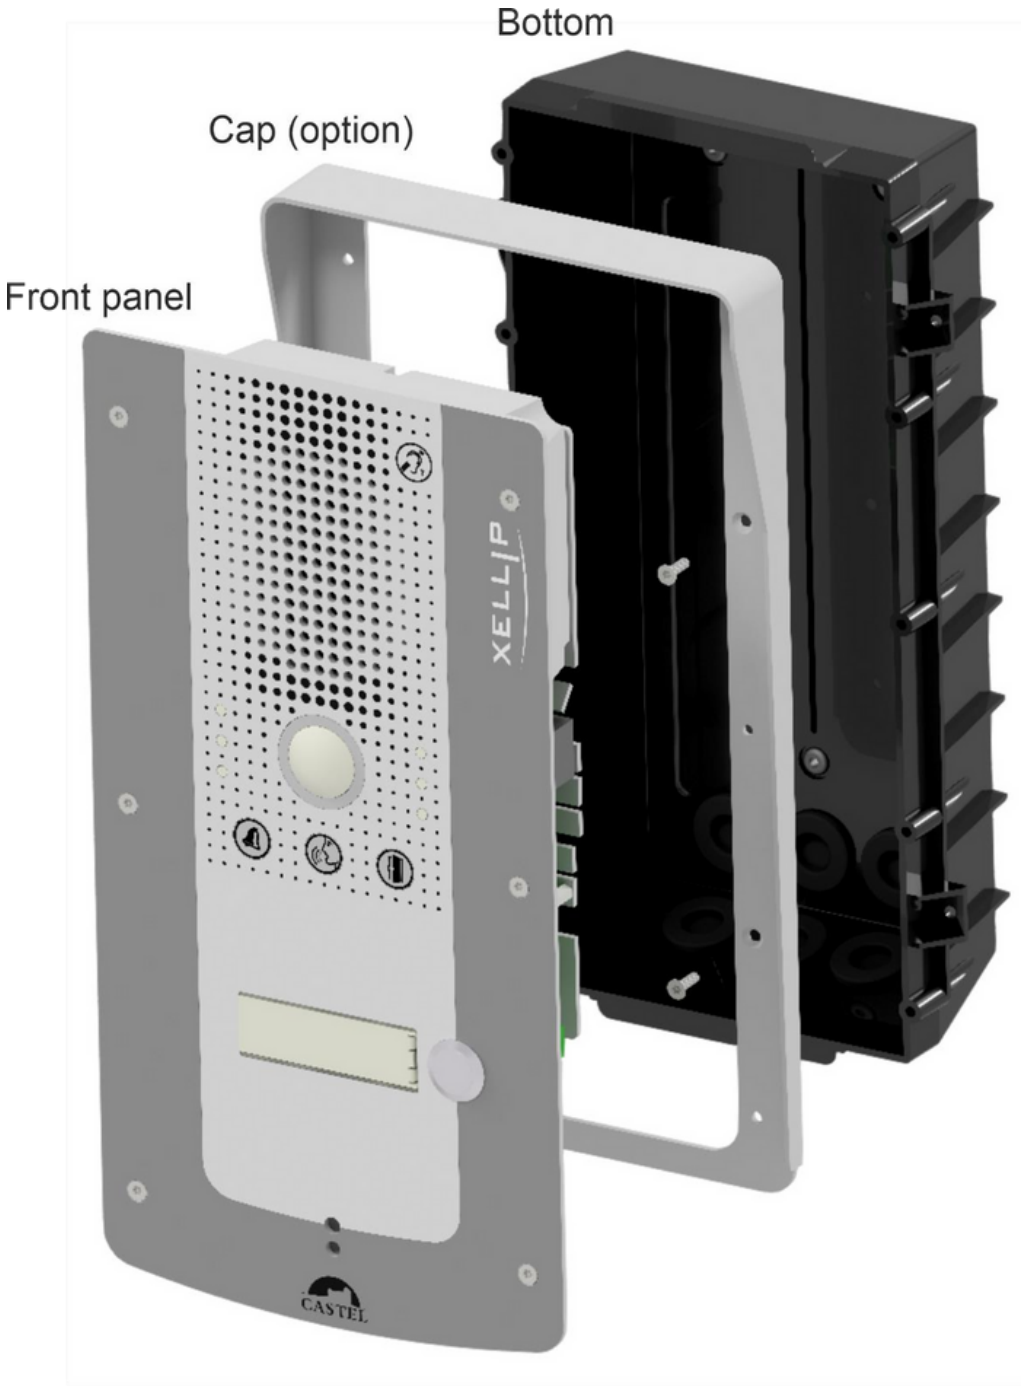

FR
EN

Mounting on a post
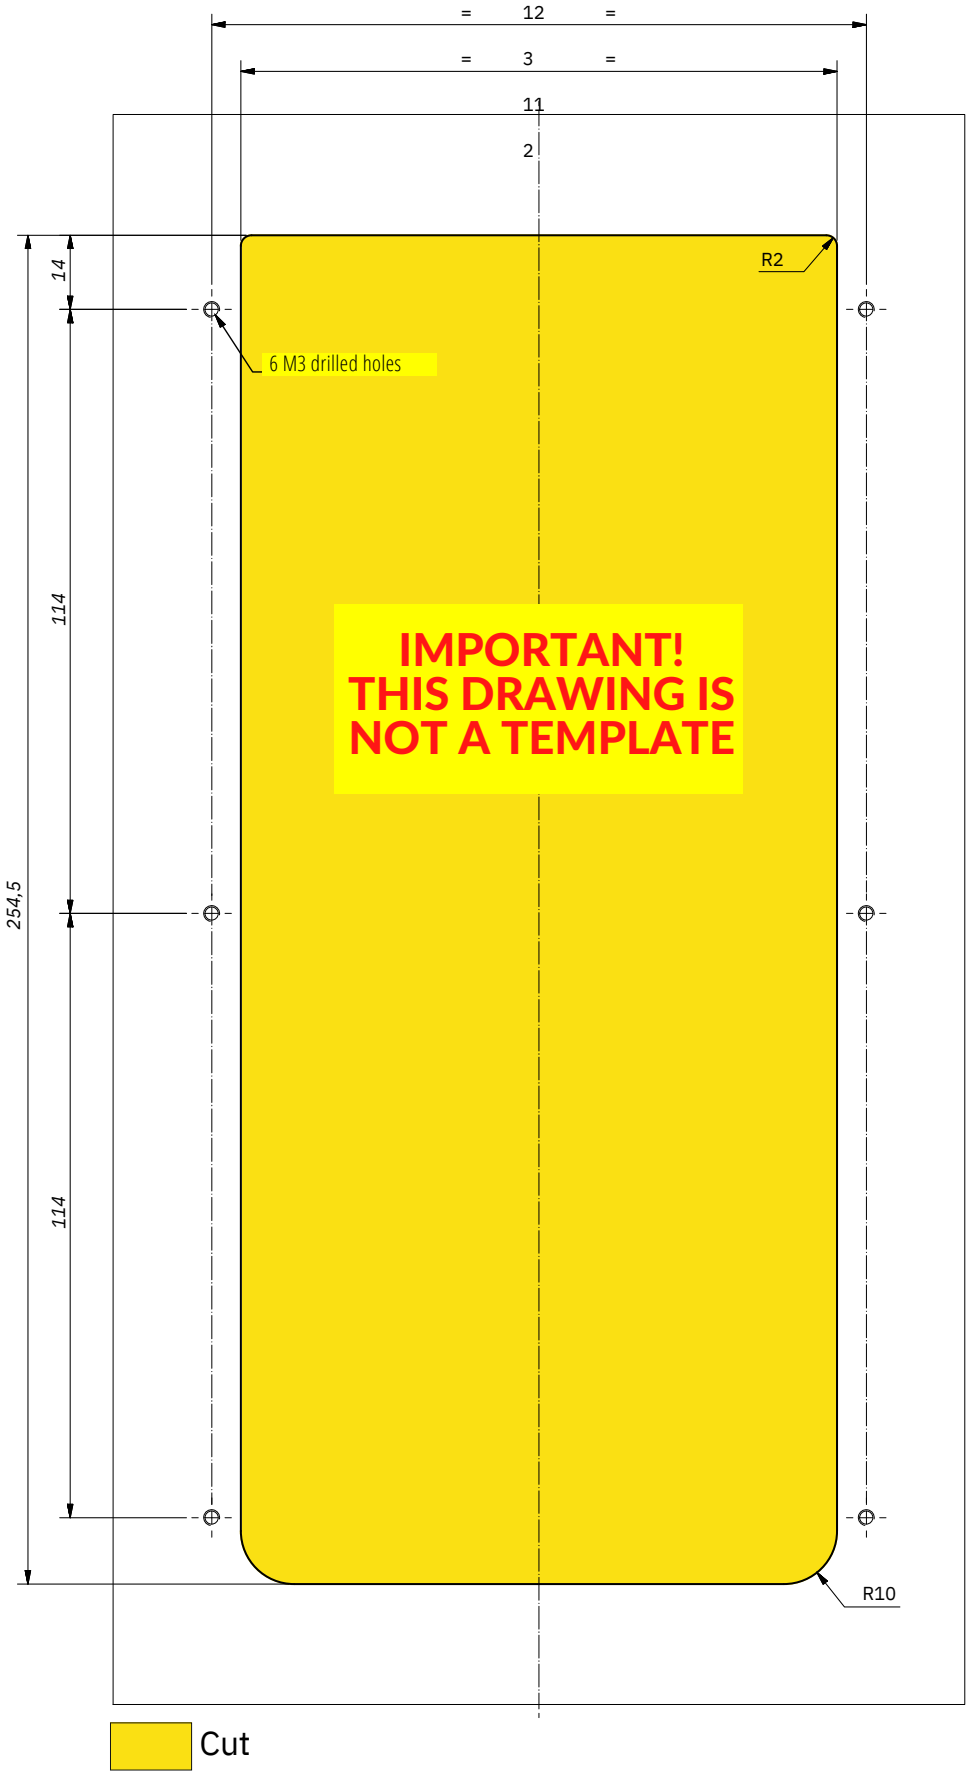
Machine the opening on the post using the drawing below.
Connect the entry station.
Attach the front panel on the post with the 6 FX teat screws (TORX) M3 x 10.
IMPORTANT! The entry station is mounted without a base, the post must be watertight (IP 65).