


# Speaker Cable 2 Core Black LSZH

**ADI**  
**PRO**

## PRODUCT OVERVIEW

Our Oxygen-Free Copper (OFC) speaker cable, renowned for its superior performance and reliability.

The OFC construction ensures that the cable runs cooler than other conductors, enhancing resistance to shorts and promoting longevity. Paired with its durable build, this cable guarantees secure sound transmission, resulting in exceptional audio quality.

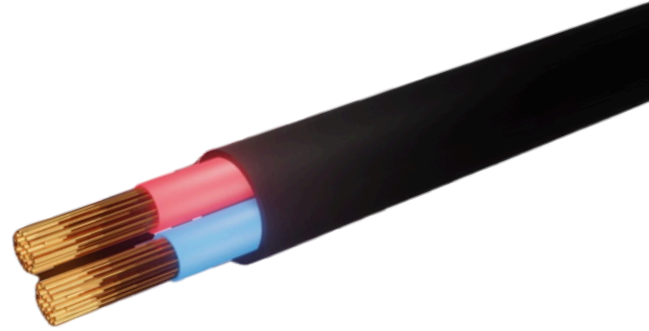

**ADI-SPKSS2C2.5LSZHBLK100**

## FEATURES

Our OFC speaker cable delivers excellent performance and durability, available in 1.5mm (189 strands) or 2.5mm (322 strands) for superior sound quality.

Oxygen Free Copper

100 metre reels

Black RAL 9005

Reaction for Fire Rating - Eca (CPR Rating)

Manufactured and tested to CE2014/30/EU, RoHS2  
2011/65/EU (PO) (m) standards

Sequential reverse metre markings (100-0)

14 American Wire Gauge (AWG)

10 Year Warranty



For more information contact your ADI sales person

Rev: v1 November 24

**UK**  
**CA**


**CE**



# Speaker Cable 2 Core Black LSZH



## CROSS-SECTION DIAGRAM

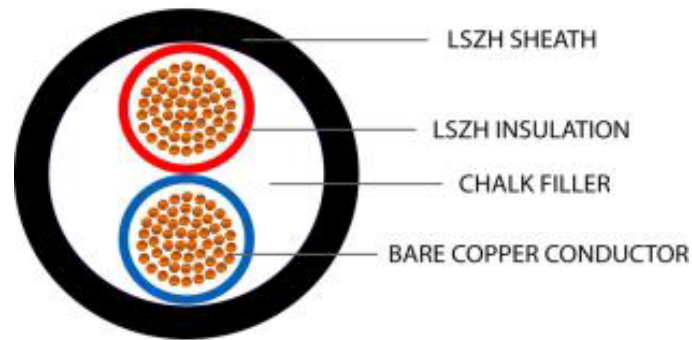

## PRODUCT SPECIFICATIONS

Conductor: Oxygen Free Copper

Conductor Size: AWG 14

Overall Diameter (mm):  $10.00 \pm 0.20$

Impedance (1-100Mhz):  $100\Omega \pm 15\Omega$

Insulation: LSZH

Insulation Thickness (mm): 0.48

Insulation Diameter (mm):  $3.00 \pm 0.15$

Insulation Colour(s): Red, Blue

Jacket: UV LSZH

Jacket Thickness (mm):  $0.80 \pm 0.01$

Rated Temperature:  $-40^{\circ}\text{C}$  to  $70^{\circ}\text{C}$

**ADI-SPKSS2C2.5LSZHBLK100**

For more information contact your ADI sales person  
Rev: v1 November 24



# Speaker Cable 2 Core Black LSZH



## CONSTRUCTION PRODUCTS REGULATIONS (CPR)

EURO CLASS (ca:cable)	CLASSIFICATION CRITERIA		CPR GUIDE		
	FIRE RATING	CPR Description			
Reaction to Fire BS EN ISO 1716			SUBCLASSIFICATIONS FOR EUROCLASSES B <sub>ca</sub> to D <sub>ca</sub>		
<b>A<sub>ca</sub></b>	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet A <sub>ca</sub> , so they should only be specified with extreme caution.	<b>(S) SMOKE PRODUCTION</b>	<b>(D) FLAMING DROPLETS</b>	<b>(A) SMOKE ACIDITY</b>
Reaction to Fire BS EN 50399			BS EN 50399/BS EN 61034-2	BS EN 50399	BS EN 60754-2
<b>B1<sub>ca</sub></b>	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1 <sub>ca</sub> .	s1a: s1 + transmittance >=80% (BS EN 61034-2)	d0: No fall of droplets or flaming particles, times for 1200 seconds	a1: Very low acidity (conductivity <2.5 μS/mm & pH >4.3)
<b>B2<sub>ca</sub></b>	Combustible, low flame spread & heat release contribution to the fire	Similar to Class C <sub>ca</sub> , although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	s1b: s1 + transmittance >=60% <80% (BS EN 61034-2)	d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds	a2: low acidity (conductivity <10 μS/mm & pH >4.3)
<b>C<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class D <sub>ca</sub> , this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class C <sub>ca</sub> though availability is improving.	s1: Low production of slow propagation of smoke		
<b>D<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	s2: Intermediate production & propagation of smoke		
Reaction to Fire BS EN 60332-1-2			s3: None of the above	d2: None of the above	d2: None of the above
<b>E<sub>ca</sub></b>	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	Visit us online: <a href="http://www.adiglobal.com">www.adiglobal.com</a>		
<b>F<sub>ca</sub></b>	Combustible, fire spread of more than 425mm	Cables classified to Class F <sub>ca</sub> may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.	Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2 <sub>ca</sub> to E <sub>ca</sub> . For a cable to meet A <sub>ca</sub> , B1 <sub>ca</sub> , B2 <sub>ca</sub> or C <sub>ca</sub> , there also needs to be regular on-going factory audits.		



ADI-SPKSS2C2.5LSZHBLK100

For more information contact your ADI sales person

Rev: v1 November 24

